


REF. 3246 BUS2 PANEL SWITCHER

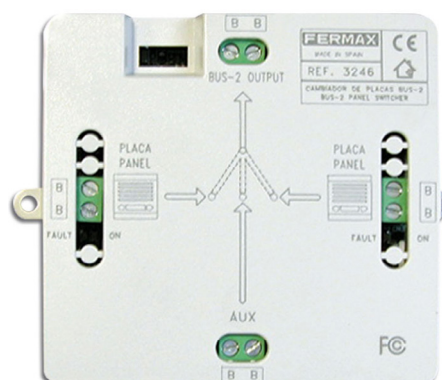

BUS 2 system: simplified installation system, minimum wiring and powerful features, guaranteeing maximum audio/video signal quality at all points of the installation. Maximum immunity to outside interference. Lets you manage buildings of up to 199 homes and 2 entrance accesses. Maximum distance from first access to last home: 250 m. BUS2 AMPLIFIER comes complete with built-in voice synthesizer. When the door release is activated a message is heard: "Door open, please close after entering". TV camera included in BUS2 video entry panels is COLOUR as standard issue. Up to 2 terminals (2 telephones, 2 monitors or 1 telephone + 1 monitor) can be installed in each home. The home terminals require simple programming, done from the outdoor panel. By means of this programming a call code is assigned to each terminal (telephone or monitor). Communication is private. Wiring: Audio/Video: 2-wire bus without polarity. We recommend CAT2 twisted pair cable for maximum distances and homes capacity. Maximum distance from first access to last home: 250 m. BUS2 switcher module is required in installations with two accesses (audio/ video).

The BUS2 panel switcher is the device that communicates the active plate with the general bus, so isolating other panels or equipment that may be connected to the bus.

ACCESORIES

FEATURES
