


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

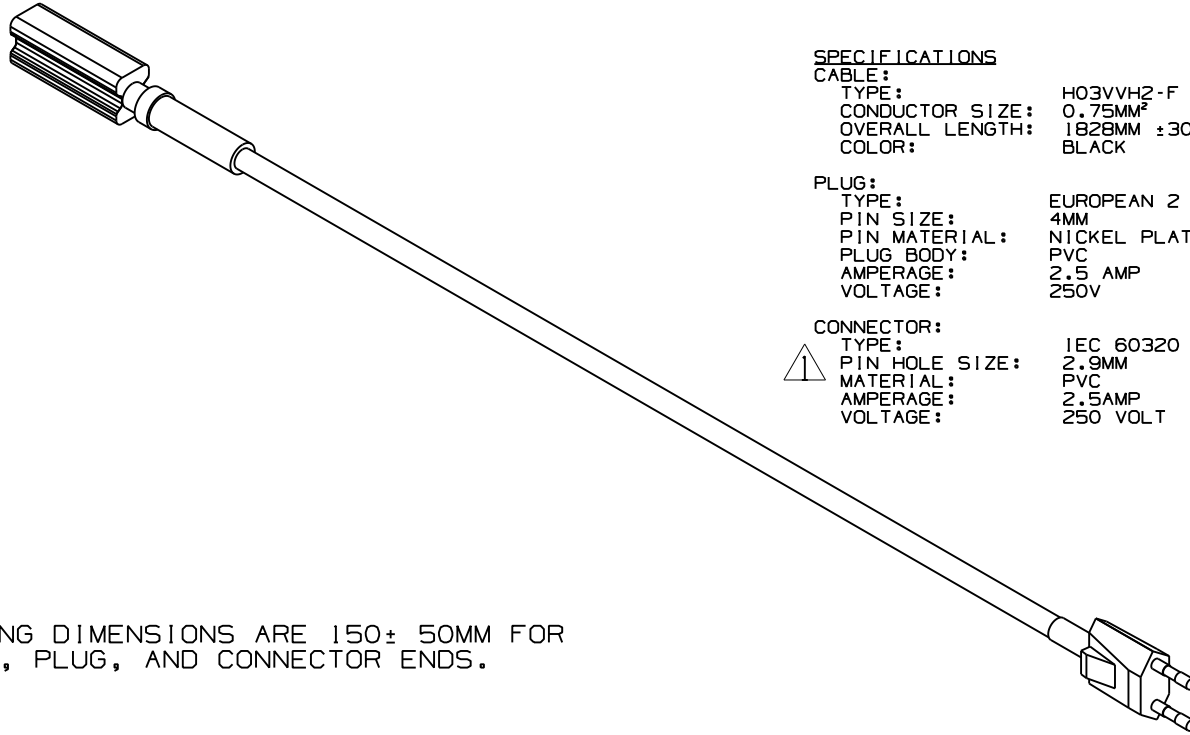

SPECIFICATIONS

CABLE:
 TYPE: H03VVH2-F
 CONDUCTOR SIZE: 0.75MM²
 OVERALL LENGTH: 1828MM ±30MM
 COLOR: BLACK

PLUG:
 TYPE: EUROPEAN 2 COND. 2.5 AMP
 PIN SIZE: 4MM
 PIN MATERIAL: NICKEL PLATED BRASS
 PLUG BODY: PVC
 AMPERAGE: 2.5 AMP
 VOLTAGE: 250V

CONNECTOR:
 TYPE: IEC 60320 - C7
 PIN HOLE SIZE: 2.9MM
 MATERIAL: PVC
 AMPERAGE: 2.5AMP
 VOLTAGE: 250 VOLT

NOTES:

- HANKING DIMENSIONS ARE 150± 50MM FOR CABLE, PLUG, AND CONNECTOR ENDS.

CAD FILENAME/LAYERS 100739AC-DC-C10392/01B

PANDUIT CORP. TINLEY PARK, ILLINOIS

CUSTOMER DRAWING
 EUROPEAN POWER SUPPLY CORD RoHS COMPLIANT
 PART NO. CORD-E2CY

UNLESS OTHERWISE SPECIFIED,
 DIMENSIONAL TOLERANCES ARE:
 (.X) ± (.XXX) ±
 (.XX) ± ANGLES ±

UNLESS OTHERWISE SPECIFIED,
 ALL DIMENSIONS ARE GIVEN
 IN INCHES, THIRD ANGLE PROJECTION.

REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP
I	10/27/09	RVU		CHANGED PART NUMBER TO "Y". THE ROHS COMPLIANT PART. IEC 60320-C7 WAS IEC 320-C7.	5893	R		
O	2-20-06	RVU		DRAWING RELEASE	4376	R		
A	2-20-06	RVU		ENGINEERING RELEASE.	0000	R		

DRAWN BY RVU	MAT'L:	SCALE NONE
DATE 2-20-06		DRAWING NO. C10392
CHK'D		DWG A SIZE