


**cUL<sub>us</sub> Grounding Clamp, U-Bolt, Bronze**

- Used to ground copper conductor parallel or at a right angle to a rod, tube, or pipe
- Made from high strength, electrolytic cast bronze
- High strength silicon bronze hardware provides long term reliable assembly
- Accommodates a wide range of pipe, tube, rod and conductor sizes – minimizes inventory
- UL Listed for grounding and bonding with AWG conductor and suitable for direct burial in earth or concrete




Part Number	Ground Rod Size In.	Iron Pipe Size In.	Conductor Size Range AWG	Figure Dimensions In.			Bolt Dia. In.	Hex Size In.	Std. Pkg. Qty.
				L	W	H			
<b>GPL-8-Q</b>	7/8 or 1	1/2 or 3/4	#8 SOL – #4 STR	2.38	1.38	2.63	3/8	9/16	25
<b>GPL-14-X</b>	—	1	#8 SOL – #4 STR	2.63	1.38	2.75	3/8	9/16	10
<b>GPL-15-X</b>	—	1	#4 SOL – 2/0 STR	2.63	1.63	2.75	3/8	9/16	10
<b>GPL-16-X</b>	—	1	2/0 SOL – 250 kcmil	2.63	1.88	3.25	3/8	9/16	10
<b>GPL-22-X</b>	—	1 1/4	2/0 SOL – 250 kcmil	3.00	1.88	3.50	3/8	9/16	10
<b>GPL-28-X</b>	—	1 1/2	2/0 SOL – 250 kcmil	3.25	1.88	4.00	3/8	9/16	10
<b>GPL-34-3</b>	—	2	2/0 SOL – 250 kcmil	3.75	1.88	4.25	3/8	9/16	3



**Grounding Clamp for Water Pipes, Bronze**



- Used to ground copper code conductor to water pipe or copper tube
- Cast from high strength, electrolytic bronze to provide reliable grounding connections
- Plated steel screws provide high strength and inhibit corrosion
- Accommodates a wide range of pipe, tube, rod and conductor sizes – minimizes inventory
- UL Listed for grounding and bonding with AWG conductor and suitable for direct burial in earth or concrete

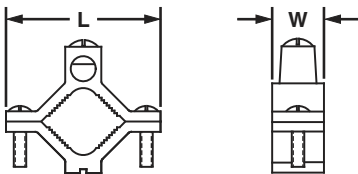

Part Number	Water Pipe Range In.	Conductor Size Range AWG	Figure Dimensions In.		Std. Pkg. Qty.
			L	W	
<b>KP1-C</b>	1/2 – 1	#10 SOL – #2 STR	2.28	0.66	100
<b>KP2-L</b>	1 1/4 – 2	#10 SOL – #2 STR	3.58	0.73	50