



Product designation Pilot light head  
Product type designation LPFL

**General characteristics**

Colour Yellow

Type of positions Pilot light head

Material Aluminium and zinc alloy for the metal part, polyamide for plastic parts

IEC degree of protection IP66, IP67 and IP69K

**Mechanical features**

Fixing Without mounting adapter

Mounting adapter LPXAU120M

**UL technical data**


UL degree of protection Type1, 2, 3R, 4, 4X, 12, 12K

**Ambient conditions**

Temperature

Operating temperature	min	°C	-25
	max	°C	+70
Storage temperature	min	°C	-40
	max	°C	+85

**Dimensions**

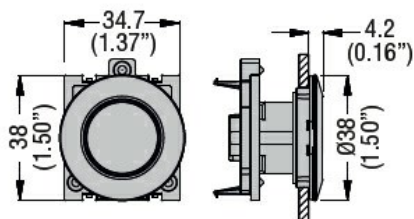

**Certifications and compliance**

Compliance

- CSA C22.2 n° 14
- IEC/EN/BS 60947-1
- IEC/EN/BS 60947-5-1
- UL508

Certificates

cULus

**ETIM classification**

ETIM 8.0

EC002024 -  
Accessories/spare  
parts for  
command  
devices