




PANDUIT P/N	WEIGHT
P20B40M	3.3kg

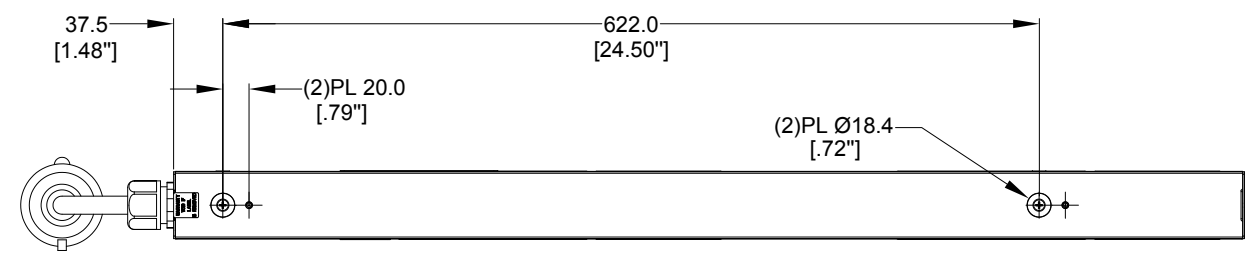


REAR VIEW

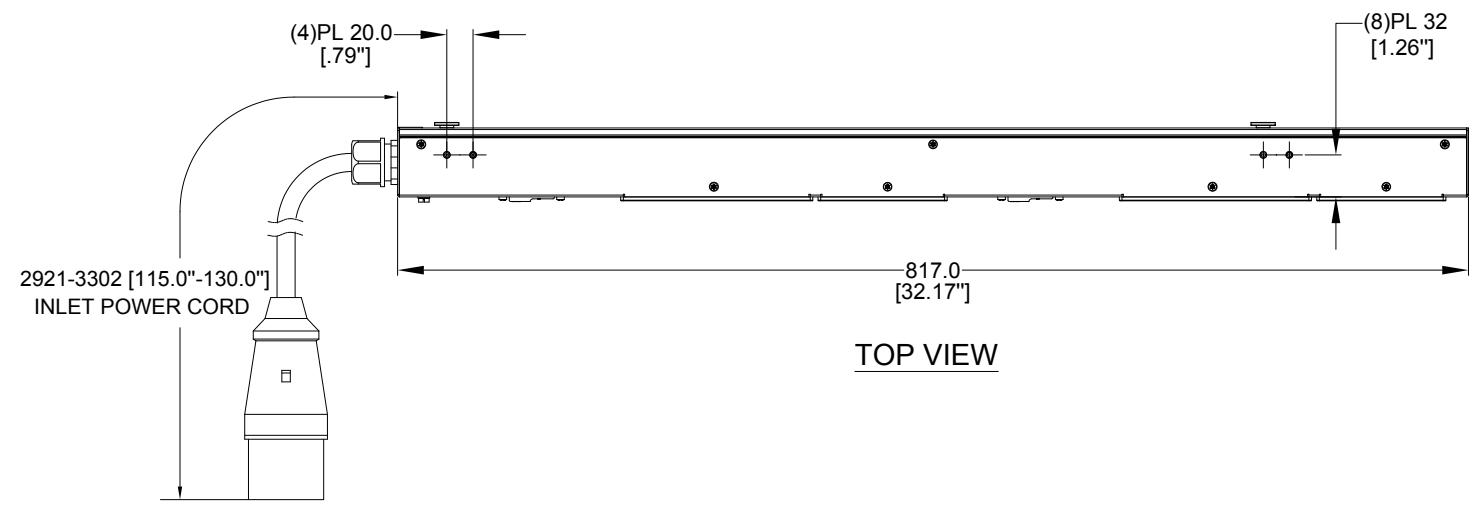

TOP VIEW

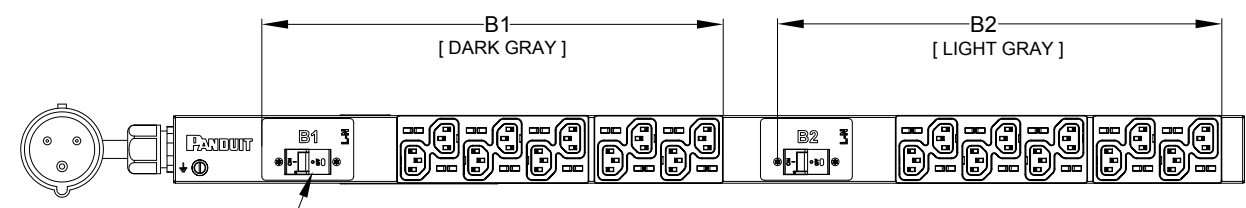

FRONT VIEW

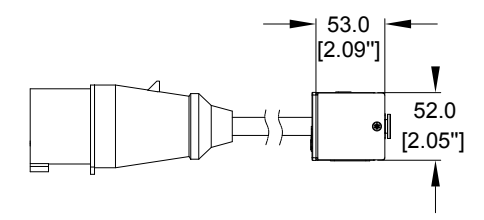


SIDE VIEW


NOTES:

- IDENTIFICATION:
  - UNIT TYPE: BASIC
  - ORIENTATION: VERTICAL, HALF
  - OUTLET QTY&TYPE: (20) C13
  - BREAKER QTY&TYPE: (2) 16AMP, SINGLE-POLE
  - INPUT VOLTAGE: 200-240VAC
  - INPUT CURRENT: 32A
  - INPUT PHASE: SINGLE-PHASE
  - RATED POWER: 7.4kVA
  - INPUT PLUG: IEC 60309 2P+E 6H 32A
  - INPUT CORD LENGTH: 3m [10']
- ACCESSORIES:
  - POCKET GUIDE
- RoHS COMPLIANT
- VISIT PANDUIT'S ON-LINE CATALOG AT WWW.PANDUIT.COM FOR ADDITIONAL PRODUCT INFORMATION CONTAINED IN THE SPECIFICATION SHEET AS WELL AS A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- MAXIMUM ALLOWABLE INPUT POWER = 7.4kW
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES


16 AMP, SINGLE - POLE ELECTRO MECHANICAL SWITCH / BREAKER (2) PLACES



PLUG  
32 AMP, 250V  
2P/3W  
IEC 60309, SPLASHPROOF, IP44  
3J (S); 3U (W), 6H



EIGHT (8)  
RECEPTACLES  
10 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C13

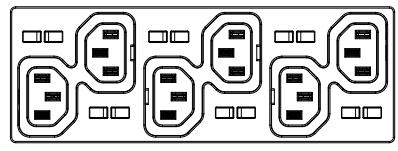

TWELVE (12)  
RECEPTACLES  
10 AMP, 250V  
STRAIGHT BLADE  
IEC 60320 / C13

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
01B	08/21/2017	JIANG	MIM	EDM	REVISED TOLERANCES	P20B40M
01A	06/28/2017	JIANG	MIM	EDM	INITIAL RELEASE	P20B40M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE BASIC SERIES PDU P20B40M CUSTOMER DRAWING		
ITEM REVISION NAME		<b>PANDUIT</b>
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 04<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		DRAWING NUMBER: P20B40M_DC
DRAWN BY: JIANG	DATE: 05/24/2017	SCALE: NONE
CHK: SEAN		
SHT 1 OF 1		SCALE: B