



GENERAL INFORMATION		OPTIC AND ILLUMINATING FEATURES	
Context	Office, Stairs and technical rooms	Optique	Wide opal
Luminaire	LED luminaire for diffuse light with emergency	Unified Glare Rating	-
Application	Interne	Lumen en sortie (Lm)	2550
Unique digital code (Datamatrix)	Currently not present	Efficiency (lm/W)	102
Couleur	Blanc	Température de couleur	4000 K
Type de source lumineuse	LED - Non remplaçable	Color Rendering Index	CRI 80
Puissance du système	25 W	Standard Deviation Colour Matching	SDCM = 5
Lifetime	L80 B50 (Tq25°) = 50.000h	Photobiological Risk Class	RG0
Poids (kg)	0.8	Norme	-
Garantie	3 années	ELETRICAL AND LIGHTING FEATURES	
Température de stockage	-20° +65°	Tension d'alimentation	220-240 V
Operating temperature	-0° +45°	Fréquence nominale (Hz)	50 / 60
MATERIALS		Driver	Included
Body	Polycarbonate	Overvoltage protection	Overvoltage protection 1kV
Vasque	Polycarbonate	Control System	ON OFF
Optic	-	INSTALLATION AND MAINTENANCE	
Gasket	-	Mouting and installation	Ceiling - Wall
Locking Hook	-	Inclination angle	-
External screw	-	Wiring	With connection terminal
Colour	PC coloured	Fixation	-
STANDARDS AND APPROVALS		Optic Maintenance	Not available
Classification	-	LED Maintenance	Not available
Appareil avec température de surface réduite	-	Driver Box	Intégrée
Certification DIN 18032-3	-	Surface maximale exposée au vent	-
IPEA	-	-	-
Classe isolement	II	-	-
Indice de protection	IP20 - IP54	-	-
Résistance aux chocs	IK08	-	-
Test du fil incandescent	750 °C	-	-

DIMENSIONS

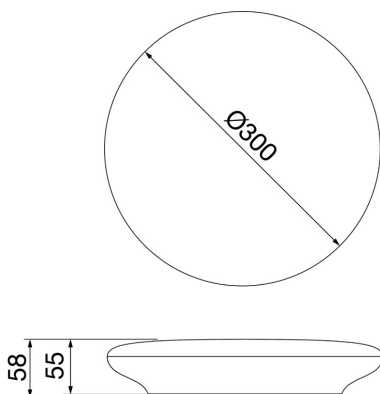

DISTRIBUTION PHOTOMETRIQUE



SYMBOLE TECHNIQUE



IP
IP20 - IP54

IK
IK08

GWT
750 °C

NORMES ET HOMOLOGATIONS



