

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



T568B WIRING SCHEME

PLUG POSITION:	CABLE WIRE:
1	WHITE/ORANGE
2	ORANGE
3	WHITE/GREEN
4	BLUE
5	WHITE/BLUE
6	GREEN
7	WHITE/BROWN
8	BROWN

NOTES:

1. NOMINAL CORD JACKET DIAMETER IS .264in. (6.7mm).
2. CONSTRUCTED WITH 23AWG SOLID CAT 6A LSZH U/UTP CABLE.
3. TERMINATED WITH (8 POSITION) CAT 6A MODULAR PLUG AT ONE END PER T568B AND FIELD TERMINABLE SPLICE MODULE ON OTHER END.
4. TERMINATES 22-26AWG SOLID OR STRANDED UTP CABLE
5. COMPATIBLE WITH CABLE JACKET  $\varnothing$  0.189" (4.8mm) - 0.272" (6.9mm)
5. MATERIALS:  
PLUG: POLYCARBONATE  
SPLICE HOUSING: POLYCARBONATE
6. DIMENSIONS IN [ ] ARE IN METRIC.

CAT 6A UTP CABLE

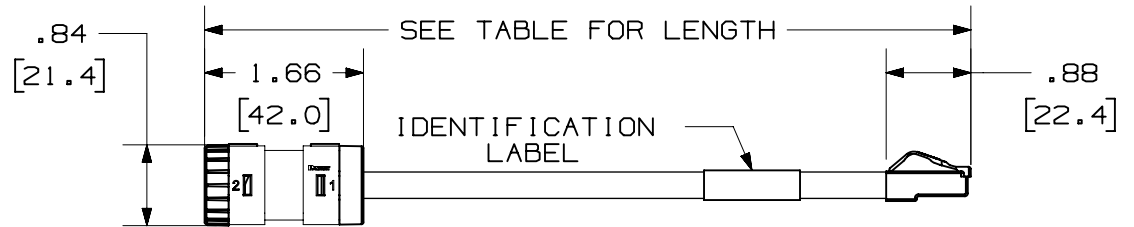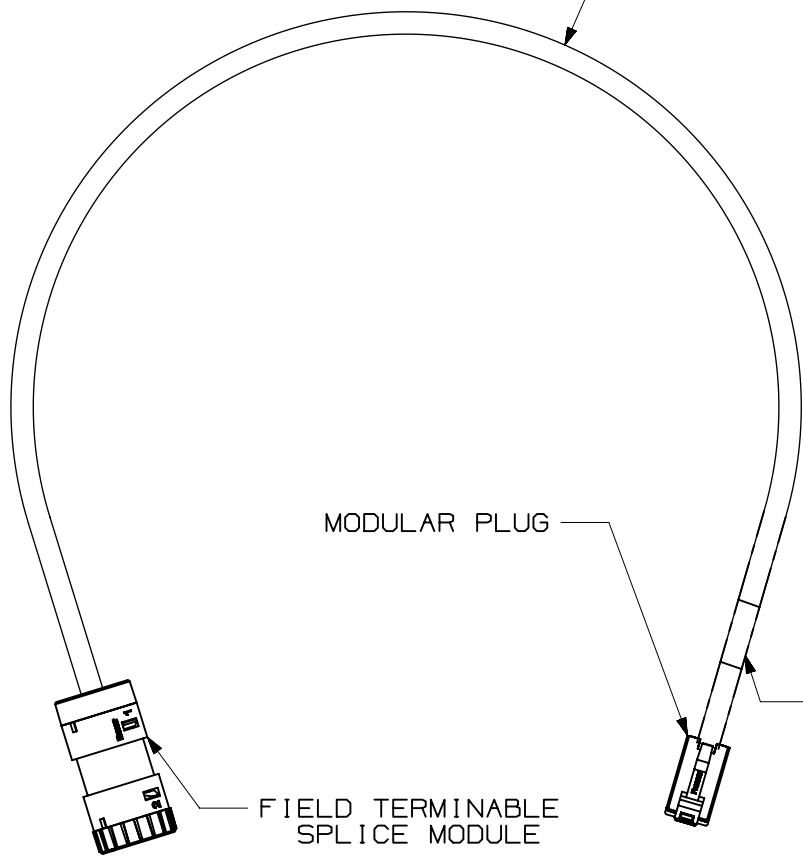

PART NUMBER	LENGTH	CABLE JACKET COLOR	CABLE JACKET FLAME RATING
FC-ICCY0.5MWH	0.5m (19.7")	WHITE	IEC 60332-1 EN 50575: Cca-s1a,d1,a1
FC-ICCY1MWH	1m (39.4")	WHITE	IEC 60332-1 EN 50575: Cca-s1a,d1,a1

PART NUMBER		SEE TABLE	
TITLE			
<b>TX6A™ LSZH UTP FieldCord™</b>			
CUSTOMER DRAWING			
ITEM REVISION NAME		01128EAA/00	
DATASET FILE NAME		01128EAA_DC/00A	
		THIRD ANGLE PROJECTION	
MATERIAL		SEE NOTES	
DRAWING NUMBER		01128EAA-DC	
DRAWN BY	DATE	CHK	SCALE
ROJC	3-4-22	REFR	NONE
SHEET 1 OF 1			SIZE
			A

A-SIZE CUSTOMER

00	3-4-22	ROJC	REFR	JNU	INITIAL RELEASE
REV	DATE	BY	CHK	APR	DESCRIPTION
					ECN