



the power of tomorrow

CLEAN ENERGY DEFINES THE WORLD THAT WE LIVE IN TODAY AND TOMORROW.
LEAD CRYSTAL® TECHNOLOGY CREATES POWER THAT IS CLEAN SAFE AND
HIGH PERFORMING FOR A BETTER FUTURE

**LEAD
CRYSTAL®
BATTERIES**


POWERED BY
Betta Batteries



DISCHARGE CURRENT AND END VOLTAGE

| Discharge current (A) | End voltage (V) |
|--|-----------------|
| 0.05C or below or Intermittent discharge | 11.4 |
| 0.05C of current close to it | 11.1 |
| 0.1C of current close to it | 10.8 |
| 0.2C of current close to it | 10.5 |
| From 0.2C to 0.5C | 10.2 |
| From 0.5C to 1C | 9.6 |
| From 1C to 3C | 9.0 |
| Current in excess of 3C | 7.8 |

CHARGE vs TEMPERATURE

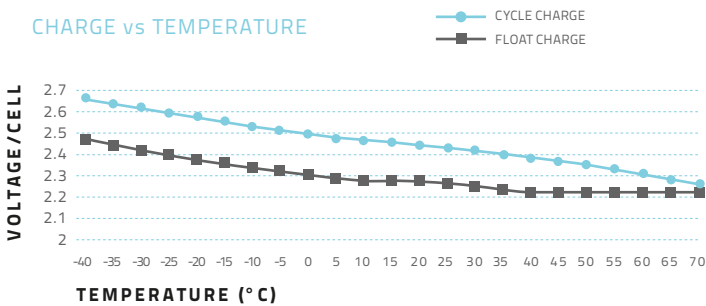

CHARGE vs TEMPERATURE CHART

| temperature | -40 | -35 | -30 | -25 | -20 | -15 | -10 | -5 | 0 | 5 | 10 | 15 | 20 | 25 | 30 | 35 | 40 | 45 | 50 | 55 | 60 | 65 | 70 |
|--------------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| Cycle Charge | 2.66 | 2.64 | 2.62 | 2.60 | 2.58 | 2.56 | 2.54 | 2.52 | 2.50 | 2.48 | 2.47 | 2.47 | 2.45 | 2.45 | 2.43 | 2.41 | 2.39 | 2.37 | 2.35 | 2.33 | 2.31 | 2.29 | 2.27 |
| Float Charge | 2.46 | 2.44 | 2.42 | 2.40 | 2.38 | 2.36 | 2.34 | 2.32 | 2.31 | 2.30 | 2.29 | 2.29 | 2.29 | 2.27 | 2.26 | 2.24 | 2.23 | 2.23 | 2.23 | 2.23 | 2.23 | 2.23 | 2.23 |

CONSTANT CURRENT DISCHARGE CHARACTERISTICS: UNITS AMPERES (25°C)

| End Voltage per cell | 5min | 15min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 12h | 20h | 24h |
|----------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|
| 1.60V | 36.70 | 19.42 | 11.73 | 8.55 | 6.89 | 3.95 | 2.87 | 2.25 | 1.92 | 1.63 | 1.24 | 1.03 | 0.87 | 0.57 | 0.46 |
| 1.67V | 34.10 | 18.78 | 11.56 | 8.50 | 6.88 | 3.93 | 2.82 | 2.24 | 1.89 | 1.62 | 1.24 | 1.02 | 0.87 | 0.56 | 0.46 |
| 1.70V | 33.76 | 18.50 | 11.44 | 8.38 | 6.82 | 3.90 | 2.80 | 2.23 | 1.86 | 1.60 | 1.24 | 1.02 | 0.86 | 0.56 | 0.46 |
| 1.75V | 30.92 | 17.92 | 11.33 | 8.32 | 6.71 | 3.82 | 2.79 | 2.20 | 1.84 | 1.59 | 1.23 | 1.01 | 0.86 | 0.56 | 0.46 |
| 1.80V | 27.74 | 16.76 | 10.87 | 8.09 | 6.53 | 3.76 | 2.77 | 2.19 | 1.82 | 1.57 | 1.23 | 1.00 | 0.86 | 0.54 | 0.46 |
| 1.83V | 26.52 | 15.38 | 10.69 | 7.80 | 6.24 | 3.73 | 2.66 | 2.10 | 1.78 | 1.51 | 1.20 | 0.96 | 0.82 | 0.53 | 0.45 |
| 1.85V | 24.85 | 14.91 | 10.00 | 7.51 | 6.07 | 3.58 | 2.60 | 2.07 | 1.73 | 1.46 | 1.19 | 0.95 | 0.81 | 0.53 | 0.45 |

DISCHARGE DATA WITH CONSTANT POWER UNITS: WATTS PER CELL (25°C)

| End Voltage per cell | 5min | 15min | 30min | 45min | 1h | 2h | 3h | 4h | 5h | 6h | 8h | 10h | 12h | 20h | 24h |
|----------------------|-------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|
| 1.60V | 61.32 | 34.10 | 21.96 | 16.01 | 12.88 | 7.46 | 5.45 | 4.32 | 3.65 | 3.13 | 2.42 | 2.00 | 1.68 | 1.12 | 0.92 |
| 1.67V | 58.37 | 33.58 | 21.07 | 15.89 | 12.89 | 7.46 | 5.38 | 4.31 | 3.65 | 3.13 | 2.42 | 1.99 | 1.68 | 1.12 | 0.92 |
| 1.70V | 58.03 | 33.35 | 21.06 | 15.89 | 12.77 | 7.40 | 5.37 | 4.30 | 3.59 | 3.10 | 2.40 | 1.98 | 1.66 | 1.12 | 0.92 |
| 1.75V | 54.04 | 32.94 | 21.09 | 15.89 | 12.72 | 7.34 | 5.36 | 4.29 | 3.58 | 3.08 | 2.39 | 1.96 | 1.66 | 1.12 | 0.91 |
| 1.80V | 49.59 | 31.27 | 20.63 | 15.60 | 12.66 | 7.34 | 5.35 | 4.28 | 3.55 | 3.08 | 2.38 | 1.95 | 1.66 | 1.09 | 0.91 |
| 1.83V | 47.85 | 28.72 | 20.46 | 15.14 | 12.14 | 7.28 | 5.20 | 4.13 | 3.51 | 2.98 | 2.38 | 1.90 | 1.64 | 1.08 | 0.91 |
| 1.85V | 44.33 | 28.09 | 19.01 | 14.57 | 11.79 | 7.11 | 5.06 | 4.08 | 3.42 | 2.92 | 2.29 | 1.88 | 1.61 | 1.06 | 0.90 |

SPECIFICATION



| | | | |
|-------------------------------|----------------------------------|--|-------|
| Nominal Voltage | 12V | | |
| Rated Capacity (10 hour rate) | 10 AH | | |
| Dimension | Total Height (top of terminal) | 102 mm | 4.02" |
| | Height | 94 mm | 3.7" |
| | Length | 151 mm | 5.94" |
| | Width | 99 mm | 3.9" |
| Weight | Approximately 4.15 kg / 9.14 lbs | | |
| Capacity | 120 hour rate (110mA) | 13.2 AH | |
| | 25°C 20 hour rate (600A) | 12 AH | |
| | 10 hour rate (1.0A) | 10 AH | |
| Internal Resistance | Fully charged Battery (25°C) | 12.5mΩ | |
| Self-Discharge 25°C | Capacity after 3 month storage | 95% | |
| | Capacity after 6 month storage | 85% | |
| | Capacity after 12 month storage | 80% | |
| Max Discharge Current 25°C | 100A (5S) | | |
| Terminal | Standard | F6 | |
| | Optional | | |
| Charging (Constant Voltage) | Cycle | Initial Charging Current 3A 14.7V/ (25°C) | |
| | Float | 13.6V/ (25°C) | |

CYCLE CHARGE CHARACTERISTIC (25°C)

FLOATING CHARGE CHARACTERISTIC (25°C)

REGULAR CYCLE CHARGE CHARACTERISTICS 77°F (25°C)



FLOATING CHARGE CHARACTERISTICS 77°F (25°C)

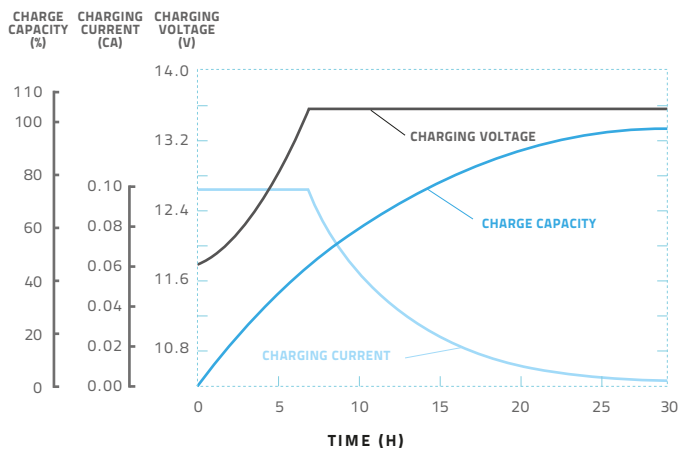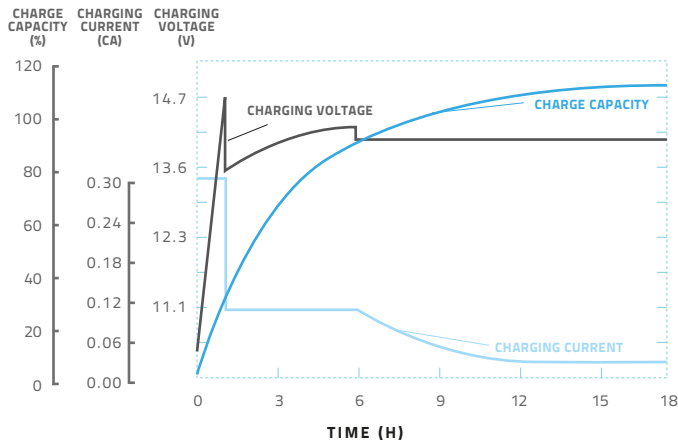

CYCLE LIFE CURVE GRAPH



CYCLE LIFE CURVE GRAPH (25°C)

CYCLE LIFE CURVE GRAPH (40°C)

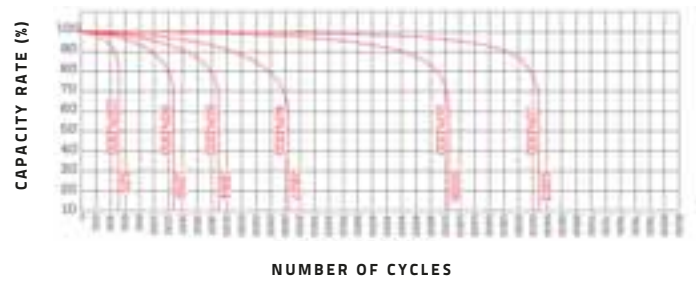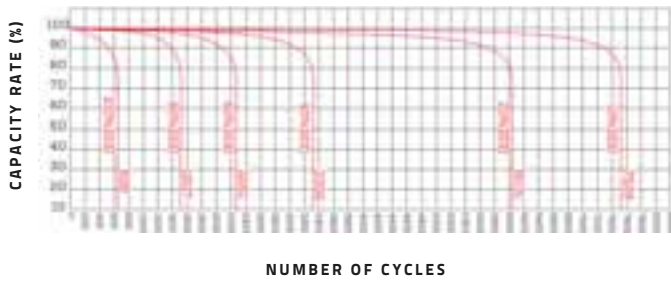


TEMPERATURE & FLOAT SERVICE LIFE

FLOAT SERVICE LIFE CURVE GRAPH

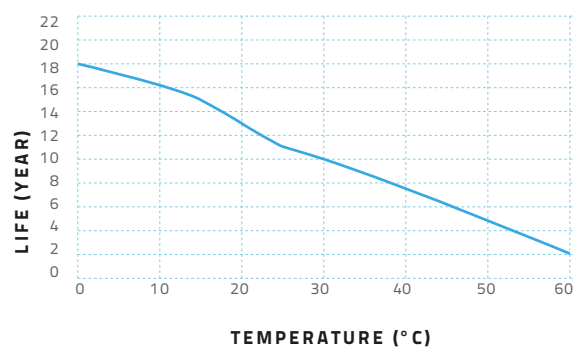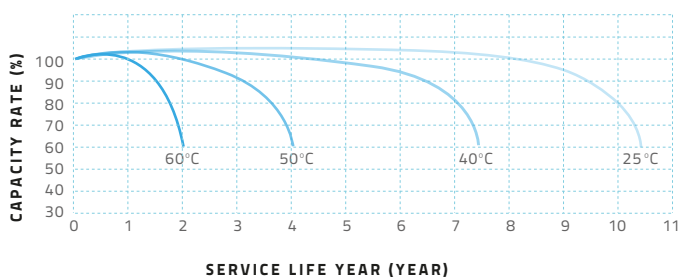

TEMPERATURE & DISCHARGE CAPACITY

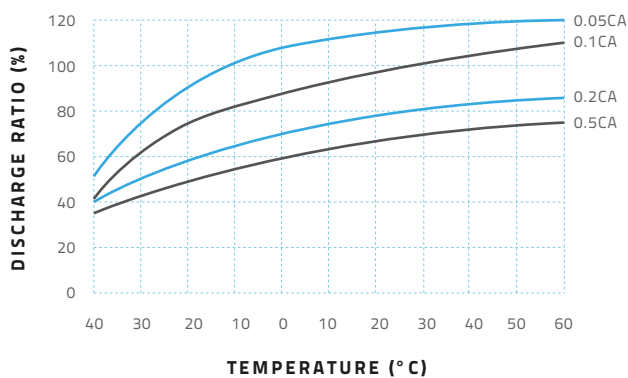

6-CNFJ-10 12V/10Ah

LEAD CRYSTAL®: CHANGING THE FUTURE

Performance Robust, resilient, high performing. Lead Crystal® batteries can be discharged deeper, cycled more often (also in extreme temperatures) and have a longer service life. They recover to full rated capacity over and over again.

Technology A unique micro-porous high absorbent mat (AGM), high-purity lead calcium selenium plates, safe SiO₂ electrolyte solution that solidifies into a white crystalline powder when charged/discharged.

Cleaner & safe Less acid, no cadmium, no antimony. Lead Crystal® batteries are up to 99% recyclable and are classified as non-hazardous goods for transport.

Markets Lead Crystal® batteries are being used in telecoms, ups, petrochem/marine, defence, renewable energy, health care, manufacturing, transportation and electric motion (wheelchairs, golf carts & trolleys).



LCBSALES@HSUPS.CO.UK | +44 1908 565656 | LEADCRYSTALBATTERY.CO.UK
HARLAND SIMON POWER SOLUTIONS | BOND AVENUE | BLETCHLEY | MK1 1TJ



www.leadcrystalbattery.co.uk