

Part number

PB 16122 SV



Mobile plug, PLUSO series, 2 poles, 12 h
(white), 16 A, 40 ÷ 50 V


Product description		Material properties	
Product type	Plug Mobile	Colour	RAL 7035 grey, RAL 9010 white
Series	PB...SV, PLUSO	RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
N. of poles	2 poles	China RoHs - EFUP	50
Clock position	12	REACH SVHC substances	Yes Lead
Technical data		SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade
Current	16 A	Approvals / Standards	
Voltage	40 ÷ 50 V	Reference standard	EN 60309-1 and -2
IP degree of protection	IP44	General ordering information	
Further technical details		EAN13 code	8015747061506
Weight	106,00 g	Packaging Information	
Operating temperature range (min, max)	-25°C ... +40°C	Packaging length	220,00 mm
		Packaging height	130,00 mm
		Packaging width	240,00 mm
		Packaging weight	1,17 kg
		Packaging volume	6,86 dm ³
		Packaging description	Carton box
		Packaging quantity	10 Pcs
		Packaging EAN code	8015747298070

Part number

PB 16122 SV



Catalogue drawings
(16 / 32A) PB ... SV

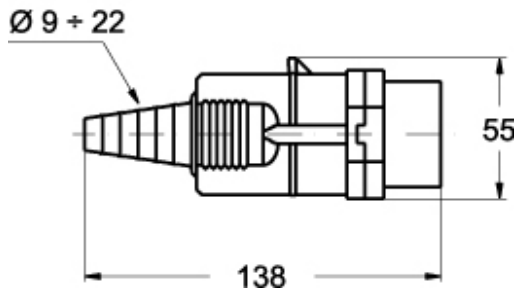

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure and insert in insulating, thermoplastic and self-extinguishing material
- RAL 7035 grey enclosure
- Plug mouth colour coded according to the operating voltage and frequency
- Wall-mounting types PB...SM, top entry with threaded grommet (replaceable with cable gland)
- Coupler types PB...SV, cable anchoring collar incorporated in the collar, entry with grommet
- Terminals with retained screws
- Nickel-plated contacts on request
- IP44 degree of protection (EN 60529)