


Product designation			
Product type designation			
Description			Rigid SM1 breaker-contactor connections SM1X Rigid SM1R breaker - BF09..25D and BF09...25L contactor connections. SM1R...
Accessories for			
Operational characteristics			
IEC maximum current (I _{max})		A	25
Mechanical features			
Operating position		normal	Other
Weight		g	44
Dimensions			

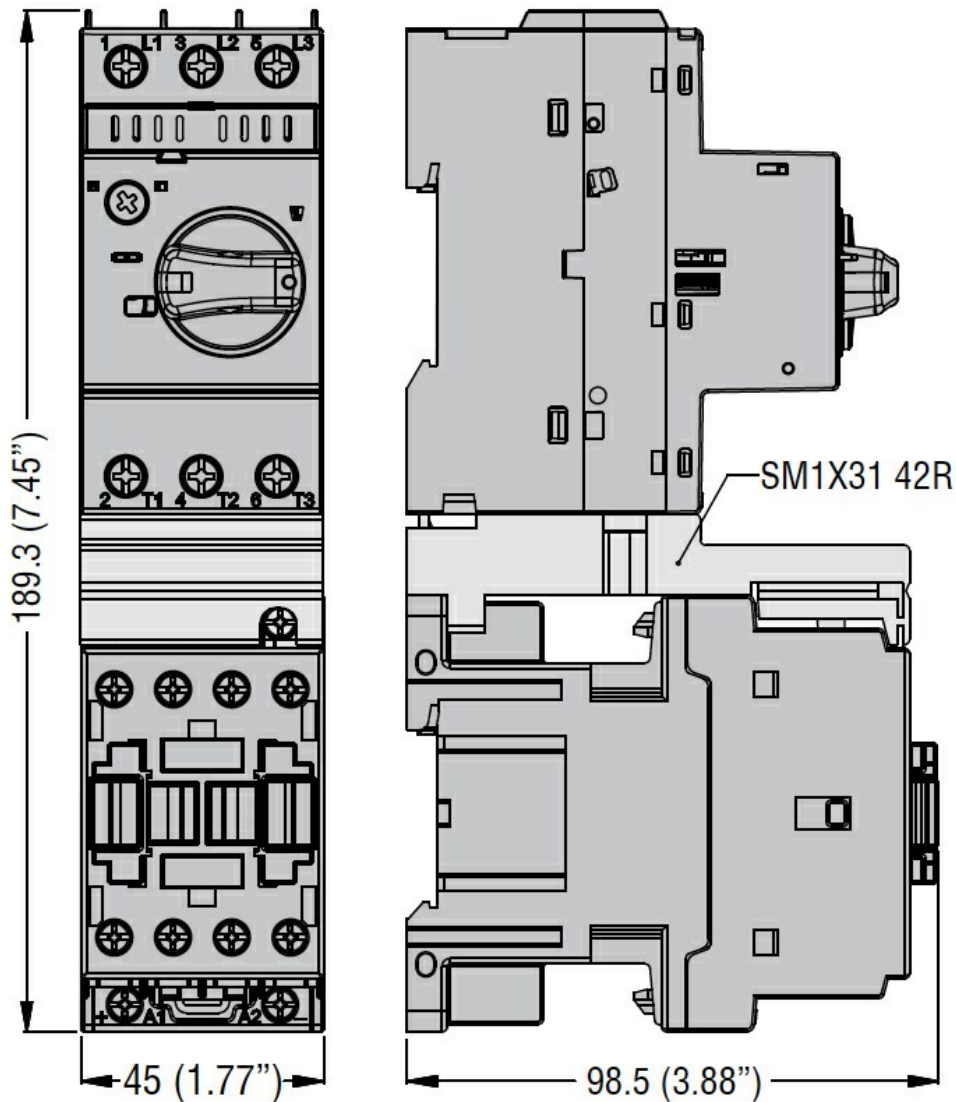

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-5-1
UL508

Certificates

cULus
EAC

ETIM classification