
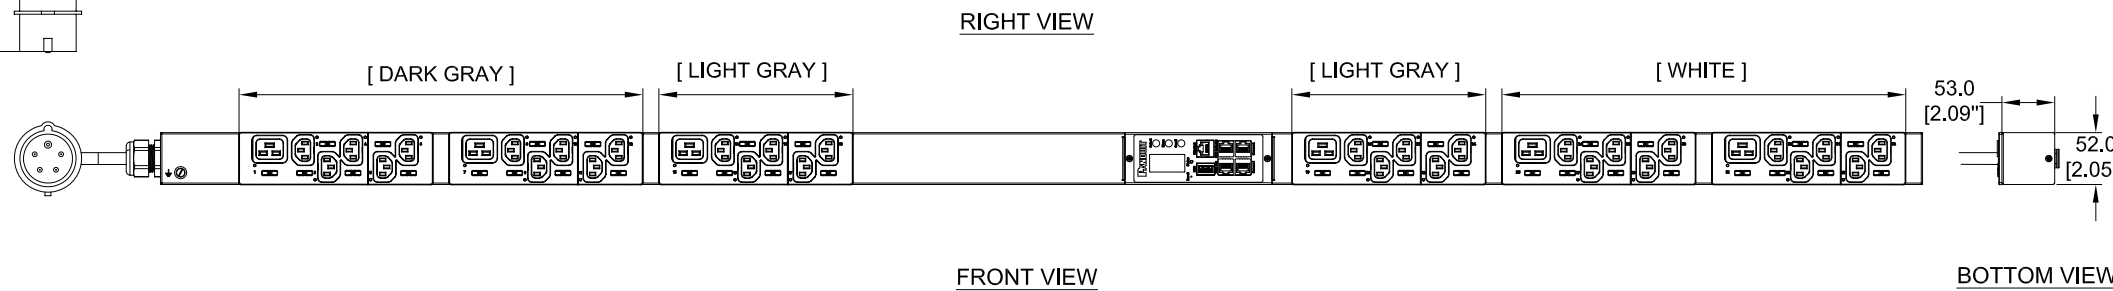
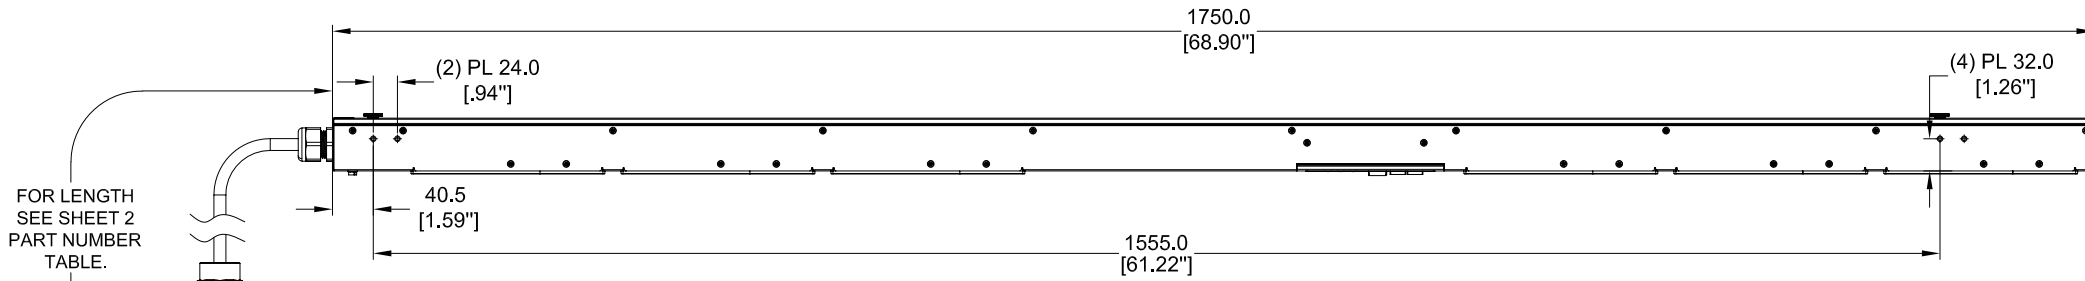
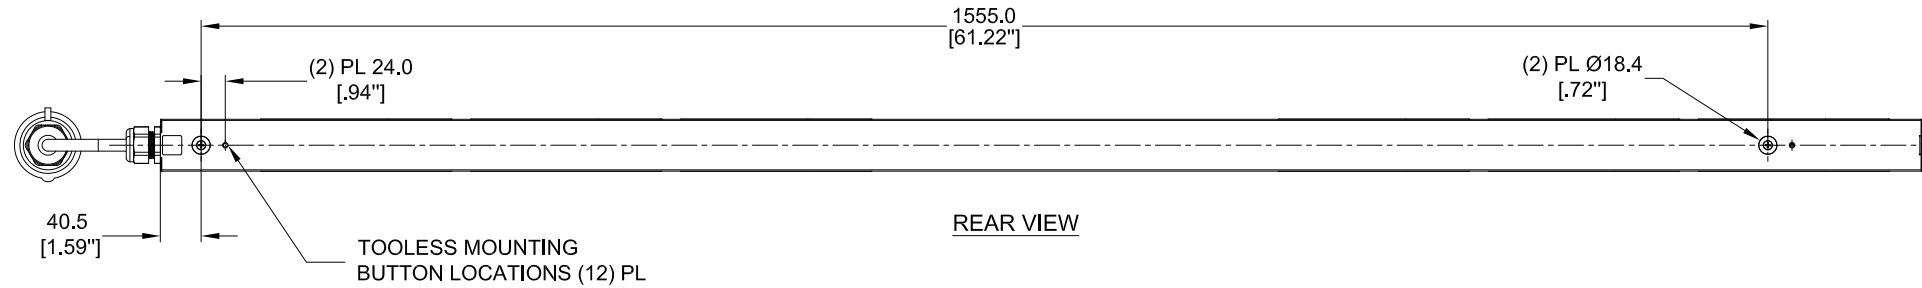


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P36E08M-XYZ	SEE SHEET 2

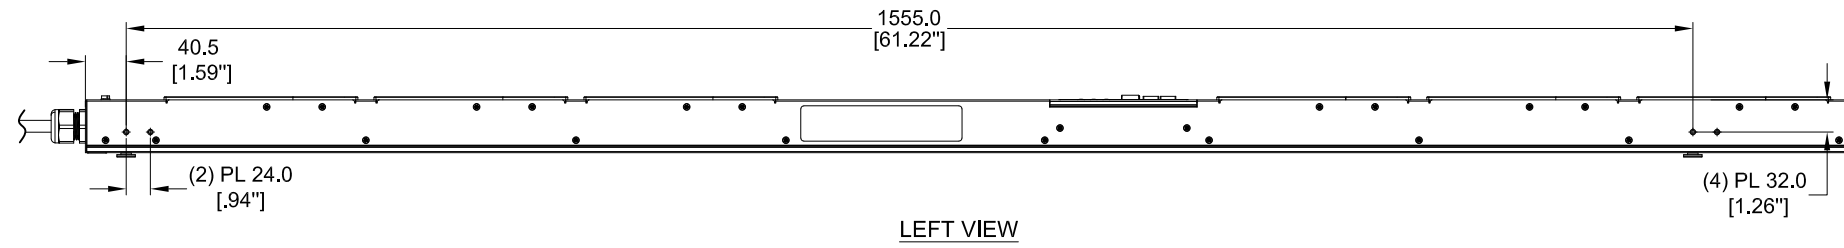

SPECIFICATION:

- STANDARD:
 - UNIT TYPE: MONITORED SWITCHED
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (30)C13, (6) C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 16A
 - BREAKER QTY & TYPE: N/A
 - INPUT PHASE: THREE-PHASE WYE
 - RATED POWER: 11.0kVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 16A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P36E08M-XX Y Z

XX: FINISHED GOOD COLOR BL =BLACK YL =YELLOW RD =RED BU =BLUE WH =WHITE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
--	---	--

PLUG/RECEPTACLE BLOCK



PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPRASHPROOF)
16A, 346-415V MAX RATED INPUT



RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT



RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	JF.YU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER	P36E08M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P36E08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P36E08M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E08M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.		SIGN DATE PRINT
TITLE INTELLIGENT SERIES PDU P36E08M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME: DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Tolerance(mm) 0<L<50 ±0.5 50<L<250 ±1.0 250<L<500 ±1.5 500<L<1000 ±2.5 1000<L<2000 ±4.0		
DRAWN BY GEORGE	DATE 10/11/2017	CHK SEAN
SCALE NONE		MATERIAL/COLOR: N/A
SHT 1 OF 2		DRAWING NUMBER: P36E08M_DC
SCALE B		

2

1

2

1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P36E08M	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-BL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-BL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-RD1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-RD1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-RD1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-WH1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-WH1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-WH1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-YL1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-YL1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-YL1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-BU1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-BU1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-BU1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-GN1A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-GN1B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-GN1C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-BL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-BL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-BL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-RD2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-RD2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-RD2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-WH2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-WH2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-WH2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-YL2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-YL2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-YL2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-BU2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-BU2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-BU2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg
P36E08M-GN2A	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'(+7"/-3.5")	7.4kg
P36E08M-GN2B	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'(+7"/-3.5")	7.6kg
P36E08M-GN2C	VERTICAL,(30) C13,(6) C19,MONITORED SWITCHED,200-240/346-415V/16A/THREE-PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'(+10'/-5")	7.8kg

B

B



A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY.

SIGN _____
DATE _____
PRINT _____

TITLE
INTELLIGENT SERIES PDU
P36E08M-XXYZ
CUSTOMER DRAWING

ITEM REVISION NAME:
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P36E08M_DC

DRAWN BY: GEORGE DATE: 10/11/2017 CHK: SEAN SCALE: NONE

SHT 2 OF 2 SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03A	06/07/2018	JF.YU	MIM	JAWI	ADDED 'BOTTOM-END FED' CONFIGURABLE PART NUMBER TO SHEET 2 TABLE AND DESCRIPTION. UPDATED IDENTIFICATION TO INCLUDE 'BOTTOM-END FED' IN CONFIGURABLE OPTION DE-CODER	P36E08M
02A	02/24/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER	P36E08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED DESCRIPTION AND ADDED VIEW	P36E08M
01A	10/11/2017	GEORGE	MIM	EDM	INITIAL RELEASE	P36E08M

