



Product designation				Auxiliary contactor
Product type designation				BG00
<b>Contact characteristics</b>				
Number of poles		Nr.	4	
Rated insulation voltage $U_i$ IEC/EN		V	690	
Rated impulse withstand voltage $U_{imp}$		kV	6	
Operational frequency				
	min	Hz	25	
	max	Hz	400	
IEC Conventional free air thermal current $I_{th}$		A	10	
Protection fuse				
		gG (IEC)	A	16
Tightening torque for terminals				
	min	Nm	0.8	
	max	Nm	1	
	min	lbin	9	
	max	lbin	9	
Tightening torque for coil terminal				
	min	Nm	0.8	
	max	Nm	1	
	min	lbin	9	
	max	lbin	9	
Max number of wires simultaneously connectable		Nr.	2	
Conductor section				
AWG/Kcmil				
		max	12	
Flexible w/o lug conductor section				
	min	mm <sup>2</sup>	0.75	
	max	mm <sup>2</sup>	2.5	
Flexible c/w lug conductor section				
	min	mm <sup>2</sup>	1.5	
	max	mm <sup>2</sup>	2.5	
Flexible with insulated spade lug conductor section				
	min	mm <sup>2</sup>	1.5	
	max	mm <sup>2</sup>	2.5	
Power terminal protection according to IEC/EN 60529				IP20 when properly wired
<b>Mechanical features</b>				
Operating position				
		normal allowable		Vertical plan ±30°
Fixing				Screw / DIN rail 35mm
Weight			g	187

Conductor section	AWG/kcmil conductor section			max	12
<b>Auxiliary contact characteristics</b>					
Thermal current I <sub>th</sub>				A	10
IEC/EN 60947-5-1 designation				A600 - Q600	
Operating current AC15				230V	A 3
				400V	A 1.9
				500V	A 1.4
Operating current DC12				110V	A 2.9
Operating current DC13				24V	A 2.9
				48V	A 1.4
				60V	A 1.2
				110V	A 0.6
				125V	A 0.55
				220V	A 0.3
				600V	A 0.1
<b>Operations</b>					
Mechanical life				cycles	20000000
<b>Safety related data</b>					
Performance level B10d according to EN/ISO 13489-1				mechanical load	cycles 20000000
Mirror contacts according to IEC/EN 60947-4-1				YES	
EMC compatibility				yes	
<b>AC coil operating</b>					
Rated AC voltage at 60Hz				V	575
AC operating voltage	of 60Hz coil powered at 60Hz			pick-up	
				min	%Us 75
				max	%Us 115
	drop-out				
				min	%Us 20
				max	%Us 55
AC average coil consumption at 20°C	of 50/60Hz coil powered at 50Hz			in-rush	VA 30
				holding	VA 4
	of 50/60Hz coil powered at 60Hz			in-rush	VA 25
				holding	VA 3
	of 60Hz coil powered at 60Hz			in-rush	VA 30
				holding	VA 4
Dissipation at holding ≤20°C 50Hz				W	0.95
<b>Max cycles frequency</b>					
Mechanical operation				cycles/h	3600
<b>Operating times</b>					
Average time for U <sub>s</sub> control	in AC				

Closing NO	min	ms	12
	max	ms	21
Opening NO	min	ms	9
	max	ms	18
Closing NC	min	ms	17
	max	ms	26
Opening NC	min	ms	7
	max	ms	17
<hr/>			
in DC			
Closing NO	min	ms	18
	max	ms	25
Opening NO	min	ms	2
	max	ms	3
Closing NC	min	ms	3
	max	ms	5
Opening NC	min	ms	11
	max	ms	17

**UL technical data**

General USE

Contactor

AC current A 10

Contact rating of auxiliary contacts according to UL

A600 - Q600

**Ambient conditions**

Temperature

Operating temperature

min °C -50  
max °C +70

Storage temperature

min °C -60  
max °C +80

Max altitude


m 3000

**Resistance & Protection**


Pollution degree

3

**Dimensions**

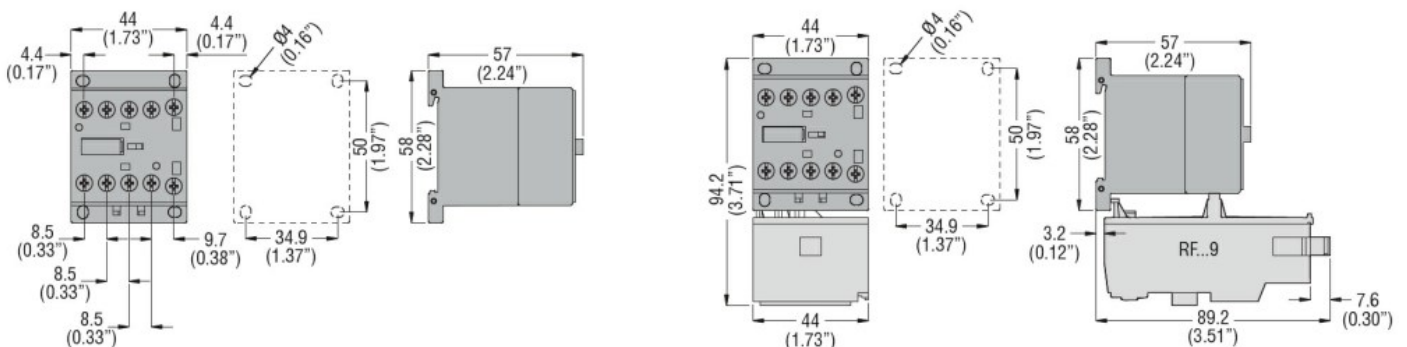

**Wiring diagrams**

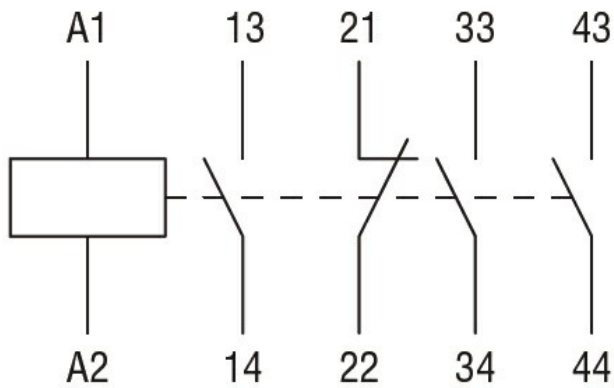

**Certifications and compliance**

Compliance

CSA C22.2 n° 60947-1

CSA C22.2 n° 60947-5-1

IEC/EN 60947-1

IEC/EN 60947-5-1

UL 60947-1

UL 60947-5-1

Certificates

CCC

cULus

EAC

**ETIM classification**

ETIM 8.0

EC000196 -  
Contactor relay