


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

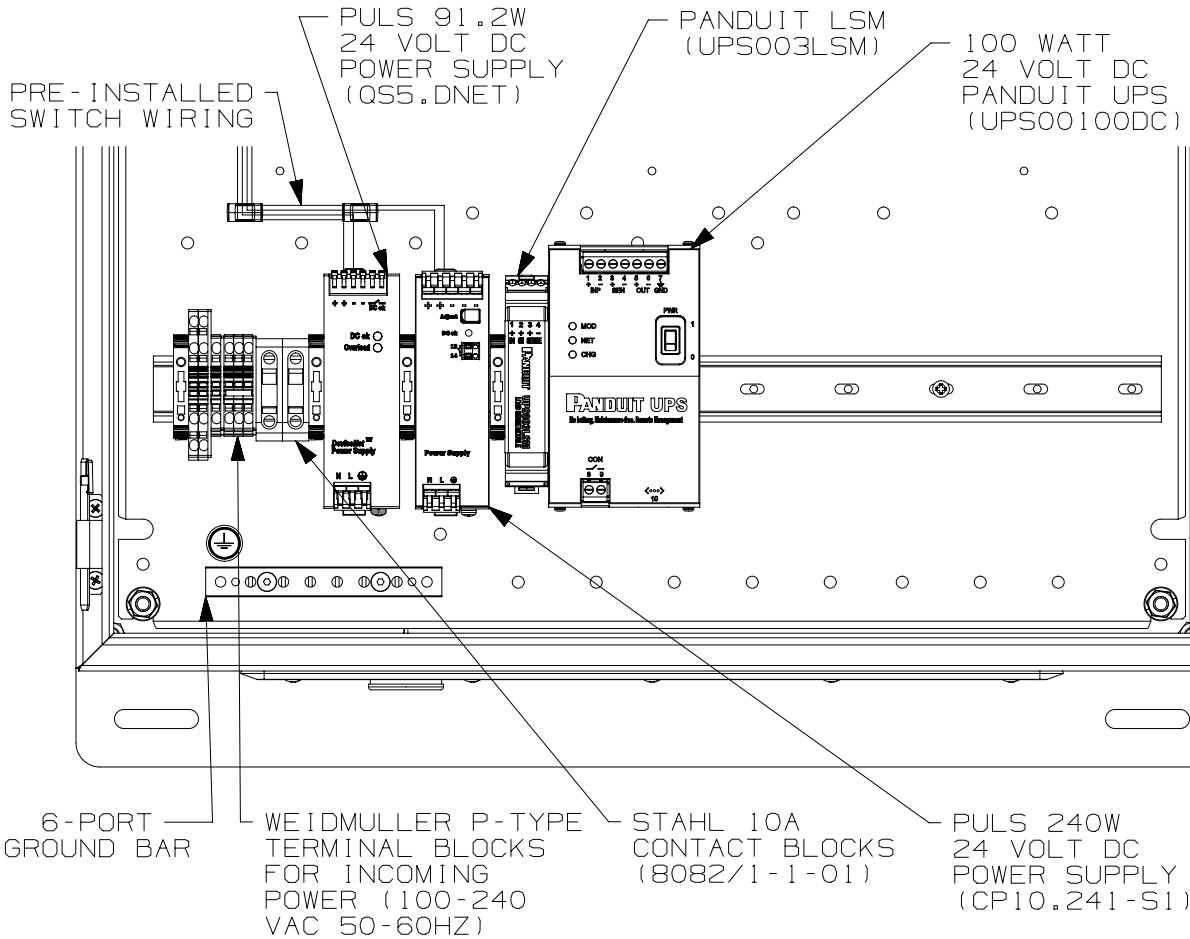

NOTES:

1. SYSTEM INCLUDES:
 - (1) PULS 240W 24 VOLT DC POWER SUPPLY (CP10.241-S1)
 - (1) PULS 91.2W 24 VOLT DC POWER SUPPLY (QS5.DNET)
 - (1) 100 WATT 24 VOLT DC PANDUIT UPS (UPS00100DC)
 - (1) PANDIT LSM (UPS003LSM)
 - (2) STAHL 10 AMP LOCKOUT CONTACT BLOCKS (8082/1-1-01)
 - (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER (100-240 VAC 50-60HZ)
 - (1) PANDUIT 6-PORT GROUND BAR
2. POWER CIRCUIT DESIGNED FOR ONE 24 VOLT DC INDUSTRIAL ETHERNET SWITCH NOT TO EXCEED 42 WATTS
3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS
4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS
5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED
6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WJ) FOR COMPLETE SCHEMATIC

00A	2/21/18	JBO	NWW	TIMH	RELEASED TO CUSTOMER			15V510JN	
REV	DATE	BY	CHK	APR	DESCRIPTION			ECN	

TITLE UNIVERSAL ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 24VDC POWER SUPPLIES, ONE 24VDC PANDUIT UPS										
CUSTOMER DRAWING										
ITEM REVISION NAME 15V510JN/00					PANDUIT					
DATASET FILE NAME 15V510JN_DC/00A										
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]										
.x ± .1 [2.54]					.xxx ± .005 [.127]					
.xx ± .01 [.25]					ANGLES ± 5 °					
DRAWN BY JBO					DATE 2/21/18		CHK NWW		SCALE 1:4	DRAWING NUMBER: 15V510JN
									SHT 1 OF 1	SIZE A

D10100DA/14