



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.


PANDUIT P/N	WEIGHT
P24G08M-XYZ	SEE SHEET 2

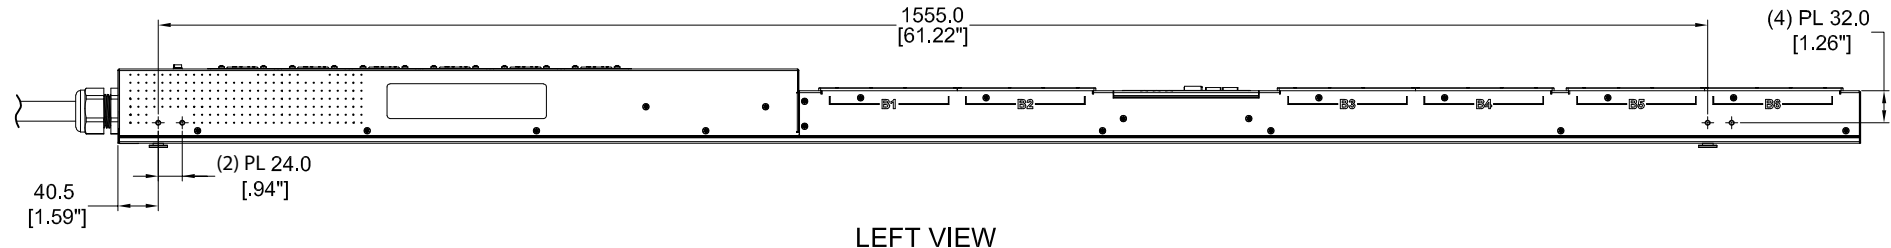


LEFT VIEW

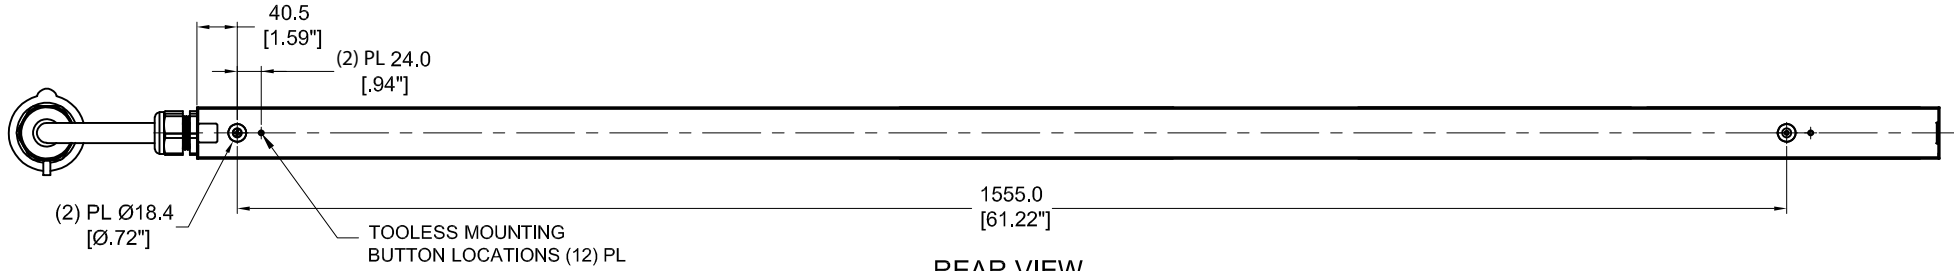

REAR VIEW

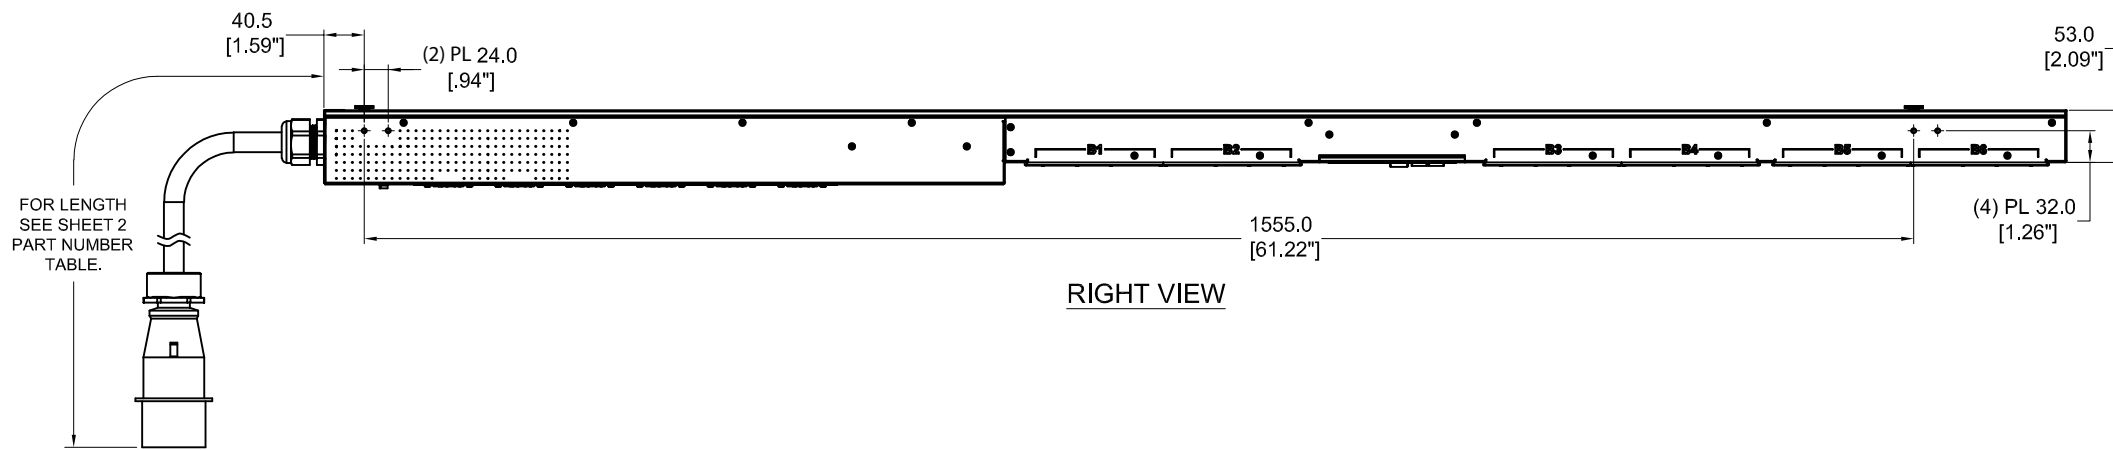

RIGHT VIEW

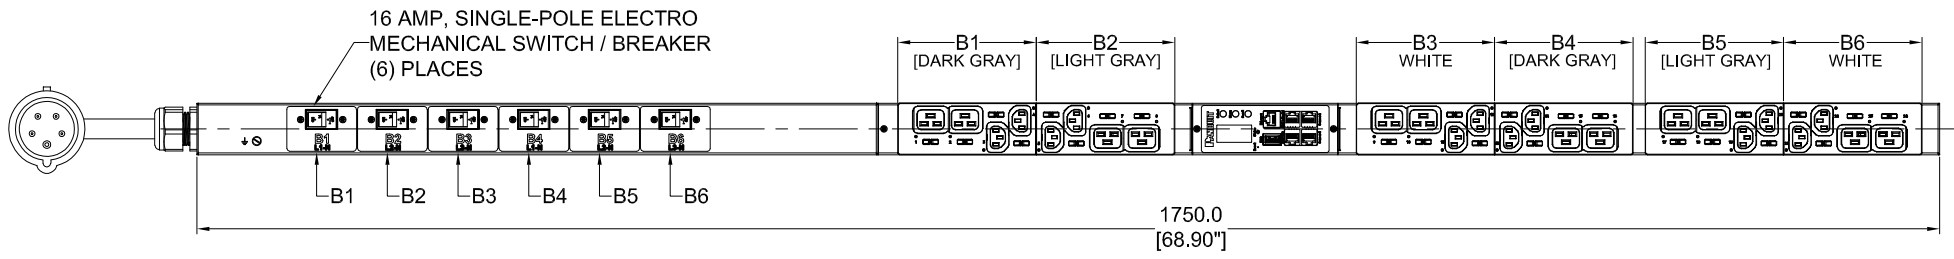

FRONT VIEW

SPECIFICATION:


- STANDARD:
 - UNIT TYPE: MONITORED & SWITCHED PER OUTLET
 - ORIENTATION: VERTICAL, 0U FULL
 - OUTLET QTY & TYPE: (12) C13, (12) C19
 - INPUT VOLTAGE: 200-240/346-415VAC
 - INPUT CURRENT: 32A
 - BREAKER QTY & TYPE: (6) 16AMP, SINGLE-POLE
 - INPUT PHASE: THREE-PHASE, WYE
 - RATED POWER: 22.0 KVA
 - INPUT PLUG: IEC 60309 3P+N+E 6H 32A
 - INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 - REGULATORY STANDARD: RoHS COMPLIANT
- ADDITIONAL: NONE
- ACCESSORIES: (1) QUICK-START GUIDE

NOTES:

- PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES]
- INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART
- FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL
- DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION

FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: P24G08M-XX Y Z



BOTTOM VIEW

XX: FINISHED GOOD COLOR BL=BLACK YL=YELLOW RD=RED BU=BLUE WH=WHITE GN=GREEN	Y: INPUT FEED TYPE 1=TOP-END FED 2=BOTTOM-END FED	Z: INPUT CORD LENGTH A=1 METER B=2 METER C=3 METER
--------------------------------------------------------------------------------------	---------------------------------------------------------	-------------------------------------------------------------

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346 - 415V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24G08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED THE DECRPTION AND ADDED VIEW	P24G08M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24G08M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____ DATE _____ PRINT _____

TITLE: INTELLIGENT SERIES PDU
P24G08M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME: _____
DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR: N/A

DRAWING NUMBER: P24G08M_DC

DRAWN BY: WSJ DATE: 10/09/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 2 SCALE: B

2



1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P24G08M	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-BL1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-BL1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-RD1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-RD1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-RD1C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-WH1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-WH1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-WH1C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-YL1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-YL1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-YL1C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-BU1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-BU1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-BU1C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-GN1A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-GN1B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-GN1C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-BL2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-BL2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-BL2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-RD2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-RD2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-RD2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-WH2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-WH2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-WH2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-YL2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-YL2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-YL2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-BU2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-BU2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-BU2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg
P24G08M-GN2A	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+3.5"/-1.75"]	9.5kg
P24G08M-GN2B	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	10.2kg
P24G08M-GN2C	VERTICAL,(12) C13,(12) C19,MONITORED & SWITCHED PER OUTLET, 200-240/346-415V/32A/3 PHASE WYE , BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	10.9kg

B

B

A

A

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	H.XU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P24G08M
01B	12/15/2017	WSJ	MIM	EDM	UPDATED THE DECRPTION AND ADDED VIEW	P24G08M
01A	10/09/2017	WSJ	MIM	EDM	INITIAL RELEASE	P24G08M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN
		DATE
		PRINT
TITLE INTELLIGENT SERIES PDU P24G08M-XYZ CUSTOMER DRAWING		
ITEM REVISION NAME		
DATASHEET FILE NAME:		
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN]		MATERIAL/COLOR: N/A
Tolerance(mm) 0<450 ±0.5 50<4250 ±1.0 250<4500 ±1.5 500<41000 ±2.5 1000<42000 ±4.0		DRAWING NUMBER: P24G08M_DC
THIRD ANGLE PROJECTION	DRAWN BY WSJ	DATE 10/09/2017
	CHK SEAN	SCALE NONE
		SHT 2 OF 2
		SCALE B

2



1