
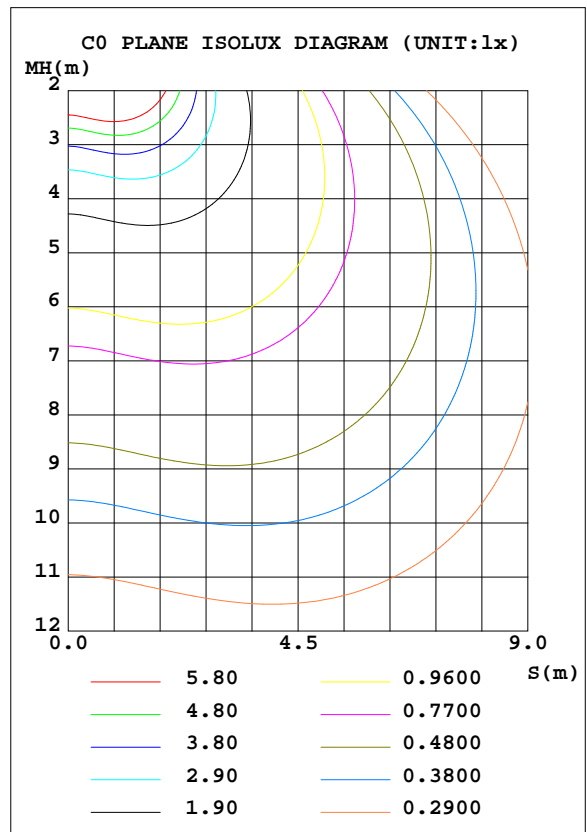


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:229.97V I:0.0411A P:4.9200W PF:0.5203 Freq:50.00Hz Lamp Flux:486.28lx1 lm		
NAME:	TYPE:	WEIGHT:
SPEC.: _B35_S_10aSA-C470ST	DIM.:	SERIAL No.: A2017008A001
MFR.:	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 98.84 lm/W			
MODEL		I <sub>max</sub> (cd)	63.08	S/MH(C0/180)	2.21
NOMINAL POWER(W)		LOR(%)	100.0	S/MH(C90/270)	2.26
RATED VOLTAGE(V)		TOTAL FLUX(lm)	486.28	η UP, DN(C0-180)	16.5,35.0
NOMINAL FLUX(lm)	486.281	CIE CLASS	SEMI-D.	η UP, DN(C180-360)	14.1,34.4
LAMPS INSIDE	1	η up(%)	30.6	CIBSE SHR NOM	2.00
TEST VOLTAGE(V)		η down(%)	69.4	CIBSE SHR MAX	2.00

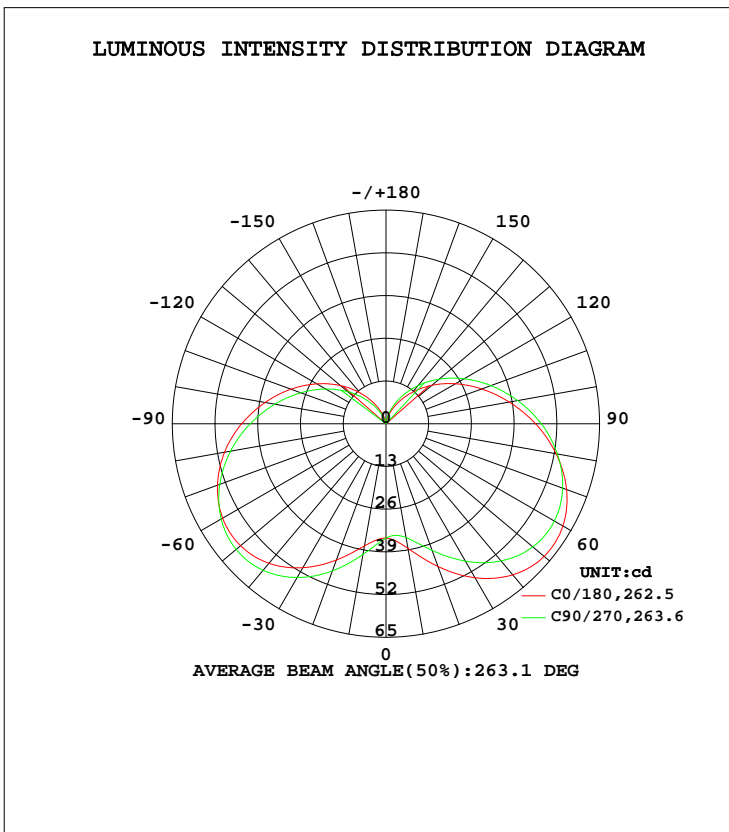

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:24.7DEG  
 Operators:LSC  
 Test Date:2020-09-23

γ Range: 0 - 180DEG  
 γ Interval: 0.5DEG  
 Test System:EVERFINE GO-R5000\_V2 SYSTEM V2.00.429  
 Humidity:48%  
 Test Distance:1.533m [K=1.0000]  
 Remarks:

Checker:

Assessor: LiHua