


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. SYSTEM INCLUDES:

- (2) PULS 91.2W 24 VOLT DC POWER SUPPLIES
- (1) PULS 24 VOLT DC UPS
- (1) PULS 24 VOLT DC BACK UP BATTERY
- (1) PULS 260W 48 VOLT DC POWER SUPPLY FOR POE
- (3) STAHL 10 AMP LOCKOUT CONTACT BLOCKS
- (2) WEIDMULLER RED AND WHITE TERMINAL BLOCKS FOR INCOMING POWER
- (1) PANDUIT 6-PORT GROUND BAR

- 2. POWER CIRCUIT DESIGNED FOR ONE OR TWO 24 VOLT DC SWITCHES NOT TO EXCEED 42 WATTS PER SWITCH
- 3. ALL ACTIVE COMPONENTS RATED FOR USE CLASS 1, DIVISION 2 ENVIRONMENTS
- 4. ALL ZONE SYSTEMS COMPLY WITH UL 508A STANDARDS
- 5. ALL ZONE SYSTEMS REQUIRE A 100-240 VOLT AC SINGLE-PHASE FEED
- 6. INTERNAL WIRING NOT SHOWN, SEE DRAWING (15V510WC) FOR COMPLETE SCHEMATIC

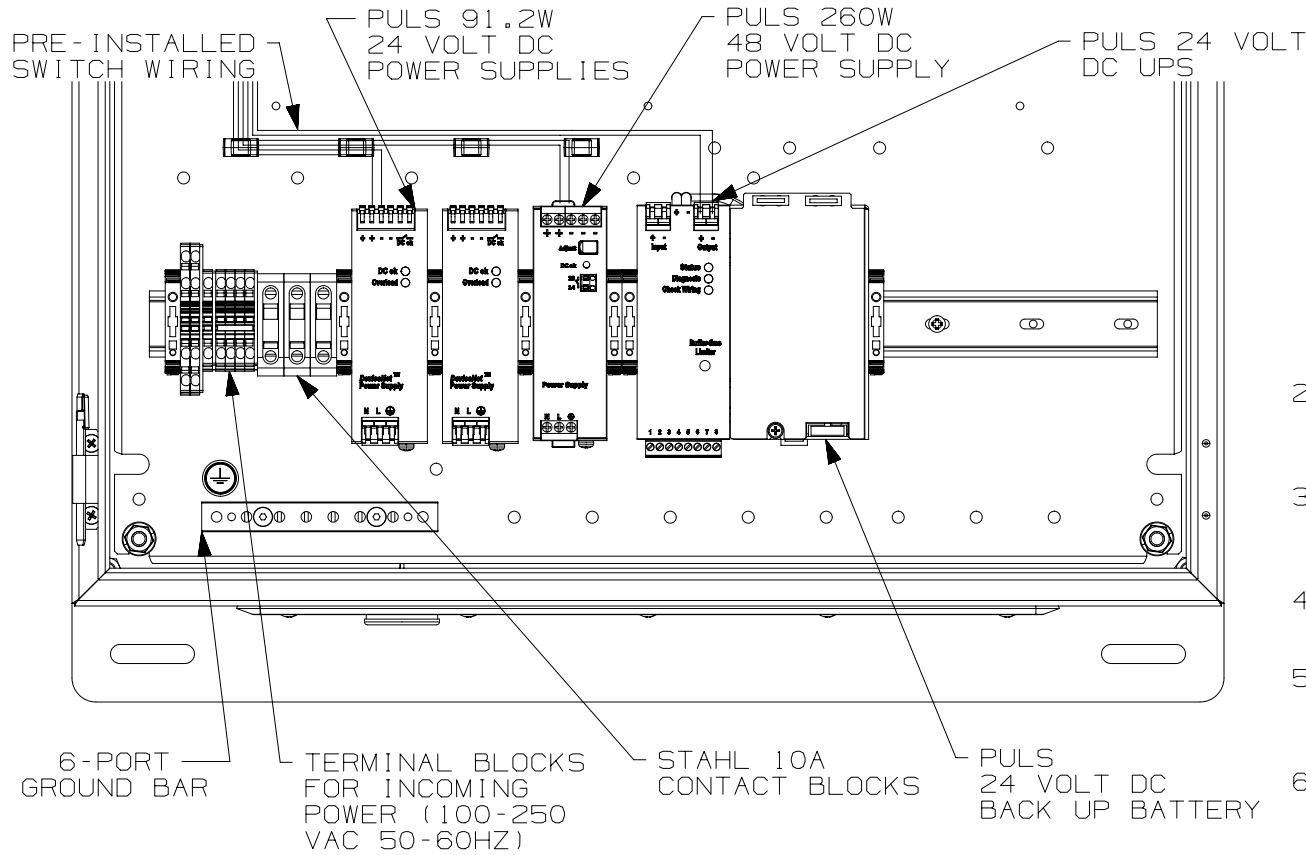

01A	2/21/18	JBO	NWW	TIMH	RELEASED TO CUSTOMER				15V510CL
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN			

TITLE UNIVERSAL NETWORK ZONE SYSTEM, 100-240VAC INPUT, REDUNDANT 91.2W 24VDC POWER SUPPLIES, BATTERY UPS, 260W 48VDC POE POWER SUPPLY CUSTOMER DRAWING			
ITEM REVISION NAME 15V510CL/01		PANDUIT	
DATASET FILE NAME 15V510CL_DC/01A			
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: INCHES +/- 0.03 METRIC - MILLIMETER +/- 0.8 X.X +/- 0.018 X.X +/- 0.46 ANGLE X.XX +/- 0.007 X.XX +/- 0.18 +/- 1°			MATERIAL: N/A
DRAWING NUMBER: 15V510CL			
DRAWN BY NWW		DATE 2/25/16	CHK TIMH
SCALE 1:4		THIRD ANGLE PROJECTION	
SHT 1 OF 1		SIZE A	

00/0003DA/00