


Part number

CIF Q07 2.4

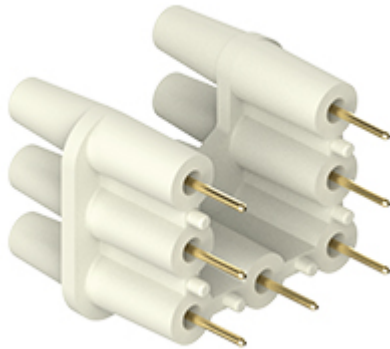

Interface for printed circuit, 7 poles, 7,5 A 250 V 4 kV 3, for up to 2,4 mm thick PCB


Product description		Material properties	
Product type	Interface for printed circuit	Main material	Polycarbonate (PC)
N. of poles	7 poles	Other materials	Contacts: copper alloy
Specification	For CQ 07 inserts For up to 2,4 mm thick PCB	Colour	RAL 7032 grey
Technical data		RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
Voltage	250 V	China RoHs - EFUP	50
Rated impulse withstand voltage	4 kV	REACH SVHC substances	Yes Lead
Pollution degree	3	SCIP number	022a8a72-7a4c-443a-a1ad-2461ccc7884c
Contact type	Turned gold plated	Approvals / Standards	
Further technical details		Certifications	DNV
Characteristics according to EN 61984	7,5 A 250 V 4 kV 3	UL	ECBT2
Weight	2,50 g	cUL	ECBT8
Operating temperature range (min, max)	-40°C...+125°C	General ordering information	
		EAN13 code	8015747270366
		eCl@ss 8.1	27449290
		ETIM 7.0	EC002943
		Packaging Information	
		Packaging length	112,00 mm
		Packaging height	95,00 mm
		Packaging width	117,00 mm
		Packaging weight	0,33 kg
		Packaging volume	1,24 dm ³
		Packaging description	Carton box
		Packaging quantity	64 Pcs
		Packaging EAN code	8015747271455
		Sub-packaging length	50,00 mm
		Sub-packaging height	44,00 mm
		Sub-packaging width	50,00 mm
		Sub-packaging weight	0,04 kg
		Sub-packaging volume	0,11 dm ³
		Sub-packaging description	Carton tray
		Sub-packaging quantity	8 Pcs
		Sub-packaging EAN barcode	8015747271462

Part number


CIF Q07 2.4



Catalogue drawings

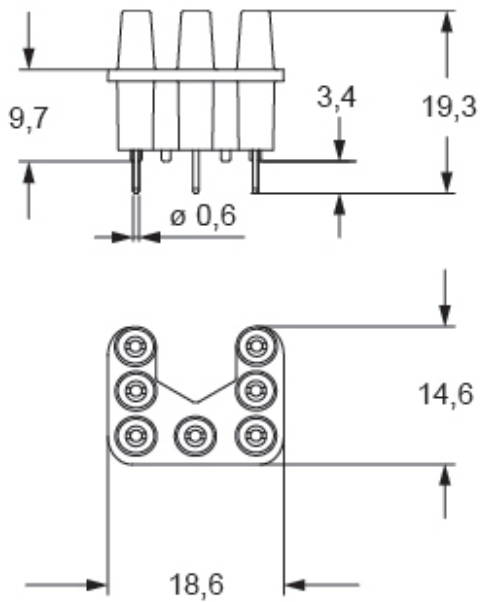

PCB-Layout

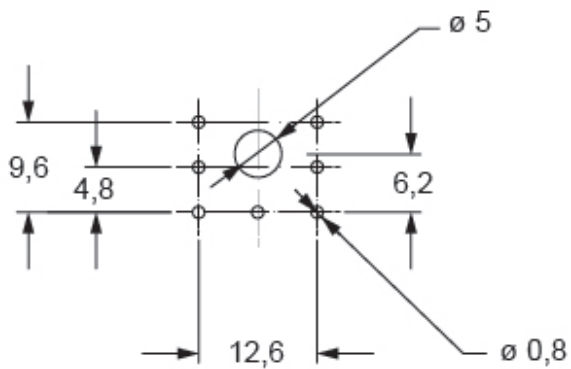

Notes

Dimensions shown in mm are not binding and may be changed without notice.

California Proposition 65 Information



WARNING

This product can expose you to lead and its compounds, known to the State of California to cause cancer and/or reproductive toxicity. For more information go to www.P65Warnings.ca.gov.
