

Part number

PB 32002 SM



Wall-mounting plug, PLUSO series, 2 poles, 32 A, 20 ÷ 25 V

Product description

Product type	Plug Wall-mounting
Series	PB...SM, PLUSO
N. of poles	2 poles
Clock position	No key way

Technical data

Current	32 A
Voltage	20 ÷ 25 V
IP degree of protection	IP44

Further technical details

Weight	131,00 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 7035 grey, RAL 4001 lilac
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight

China RoHs - EFUP

50

REACH SVHC substances

Yes

Lead

SCIP number Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard EN 60309-1 and -2

General ordering information

EAN13 code 8015747061810

Packaging Information


Packaging length	208,00 mm
Packaging height	140,00 mm
Packaging width	290,00 mm
Packaging weight	1,54 kg
Packaging volume	8,44 dm ³
Packaging description	Carton box
Packaging quantity	10 Pcs
Packaging EAN code	8015747061827

Part number

PB 32002 SM



Catalogue drawings
(16 / 32A) PB ... SV

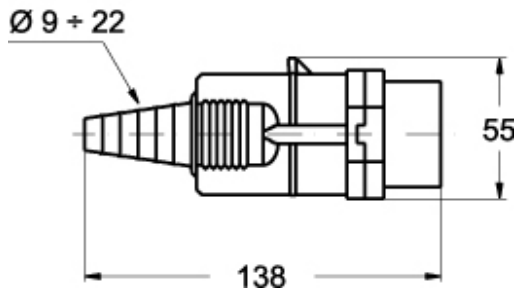

Notes

Dimensions shown in mm are not binding and may be changed without notice.

- Compliant with EN 60309-1 and -2
- Enclosure and insert in insulating, thermoplastic and self-extinguishing material
- RAL 7035 grey enclosure
- Plug mouth colour coded according to the operating voltage and frequency
- Wall-mounting types PB...SM, top entry with threaded grommet (replaceable with cable gland)
- Coupler types PB...SV, cable anchoring collar incorporated in the collar, entry with grommet
- Terminals with retained screws
- Nickel-plated contacts on request
- IP44 degree of protection (EN 60529)