




Terminal block for Product designation busbar supply Product type designation 11SMX Terminal block for Description busbar supply SM1P..., SM1R... Accessories for Auxiliary contact characteristics Rated insulation voltage Ui IEC/EN ٧ 690 Rated impulse withstand voltage Uimp kV 4 Operational characteristics IEC maximum current (Imax) Α 63 Mechanical features Tightening torque for terminals 2.5 Nm min max Nm 3 Conductor section AWG/Kcmil 10 min max 4 Flexible c/w lug conductor section 4 mm² min max mm² 25 Terminals tool Ph2 Weight 48 g

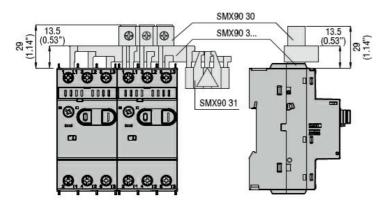

Certifications and compliance

Compliance

Dimensions

CSA C22.2 n° 14

IEC/EN 60947-1

IEC/EN 60947-5-1

UL508

Certificates





TERMINAL BLOCK FOR BUSBAR SUPPLY. FOR ALL BUSBAR TYPES. FOR SM1...

EAC

ETIM classification