


Eaton RA Series IT Rack - Gen2

Engineered for the Edge. All you need, right out of the box

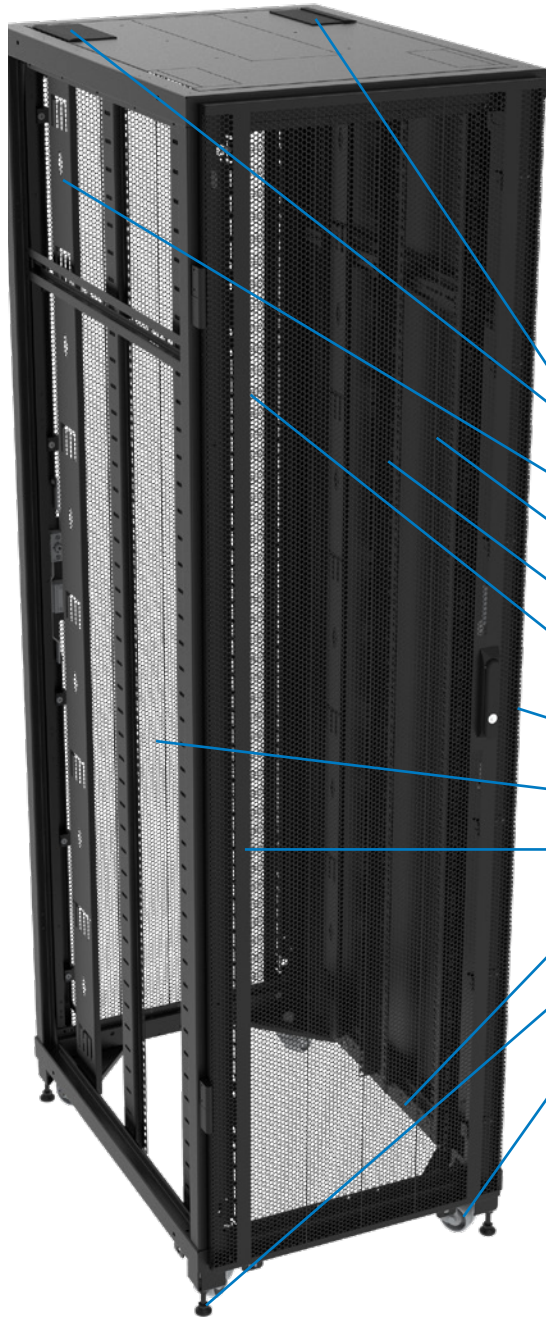

Perfect for Edge applications with Eaton UPSs, RackPDUs and monitoring software. Fully equipped for fast and easy, plug & play installations in network closets, server rooms and enterprise.

24U, 42U & 48U
600mm, 800mm wide
800mm - 1200mm deep

- Brushed top cable entry
- Cable & PDU managers 100mm wide (2x)
- Locking side panels (2x)
- Perforated doors - front & rear.
- 19" adjustable rails (4x)
- Locking swing handles
- Split rear doors when 800mm wide
- U-height labels, front & rear
- Earth kit
- Jacking feet, 1500 load
- Castors, 500kg load
- Baying kit
- Black colour
- Made in UK

[Configure your system here, Racks, UPSs, PDUs, ATs, software and accessories:](#)

[Further racks and accessories available, click here](#)



Powering Business Worldwide

Eaton RA Series IT Rack Gen2 technical specifications & accessories

Equipment mounting height	24U	24U	24U	42U	42U	42U
Width & Depth (mm)	600W x 800D	600W x 1000D	800W x 1000D	600W x 800D	600W x 1000D	600W x 1200D
Order Code (Black finish)	RAA24608PSB13U	RAA24610PSB13U	RAA24810PSB13U	RAA42608PSB13U	RAA42610PSB13U	RAA42612PSB13U
Physical						
Height (castors fitted as standard)	1293mm	1293mm	1293mm	2093mm	2093mm	2093mm
Height (castors removed)	1267mm	1267mm	1267mm	2067mm	2067mm	2067mm
Width	600mm	600mm	800mm	600mm	600mm	600mm
Depth (over cladding)	860mm	1060mm	1060mm	860mm	1060mm	1260mm
Weight of assembled rack	64kg	78kg	88kg	84kg	98kg	107kg
Front door—Perforated	Single	Single	Single	Single	Single	Single
Rear door—Perforated	Single	Single	Split	Single	Single	Single
Max rail mounting depth*	714mm	838mm	914mm	714mm	914mm	1114mm

Equipment mounting height	42U	42U	42U	48U	48U
Width & Depth (mm)	800W x 800D	800W x 1000D	800W x 1200D	600W x 1000D	800W x 1000D
Order Code (Black finish)	RAA42808PSB13U	RAA42810PSB13U	RAA42812PSB13U	RAA48610PSB13U	RAA48810PSB13U
Physical					
Height (castors fitted as standard)	2093mm	2093mm	2093mm	2360mm	2360mm
Height (castors removed)	2067mm	2067mm	2067mm	2334mm	2334mm
Width	800mm	800mm	800mm	600mm	800mm
Depth (over cladding)	860mm	1060mm	1260mm	1060mm	1060mm
Weight of assembled rack	95kg	110kg	120kg	104kg	118kg
Front door—Perforated	Single	Single	Single	Single	Single
Rear door—Perforated	Split	Split	Split	Single	Split
Max rail mounting depth*	714mm	914mm	1114mm	914mm	914mm

* without cable trays

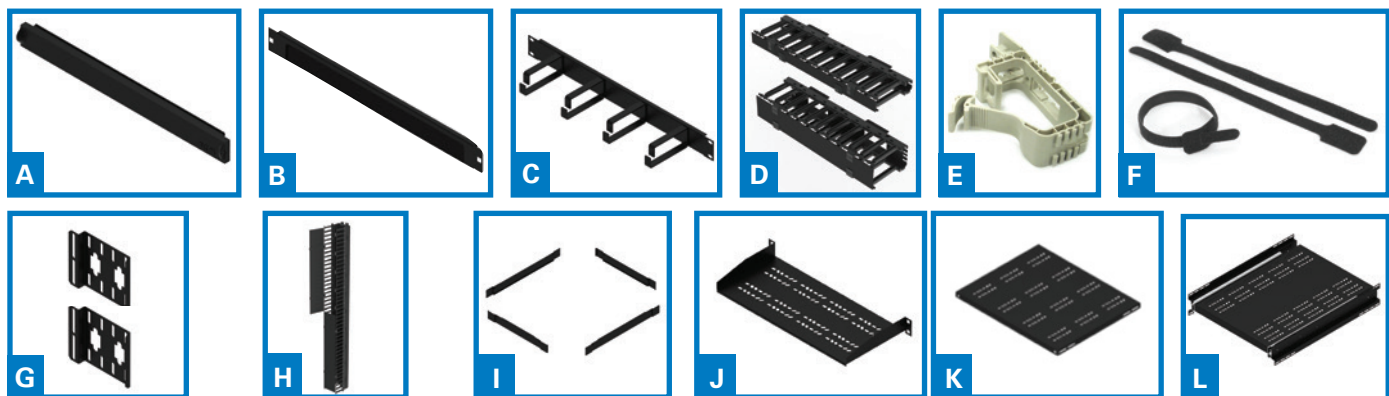


Image	Part Code	Description	Compatibility	
			RA Series	Universal
A	ETN-PBP1U10	1U Blanking panels, 19" mount plastic (10pcs)	•	•
B	ETN-OBSP1U	1U Brushed blanking panel, 19" mount (1pc)	•	•
C	ETN-JRP1U	1U Horizontal cable manager with 4 rings (1pc)	•	•
D	ETN-HDHCM1UBU	1U Horizontal cable manager, high density with fingers and cover. (1pc)	•	•
D	ETN-HDHCM2UBU	2U Horizontal cable manager, high density with fingers and cover. (1pc)	•	•
E	ETN-CTLU	Cable ring, plastic, (127mm x 70mm x 29mm), (1pc)	•	•
F	ETN-BX45V11	Velcro tie straps 280mm x 13mm (50 pcs)	•	•
G	RAEPDUMK	Rack PDU mounting brackets (pair), mounts 2 PDUs side-by-side	•	n/a
H	RAHDVCMK42USU	42U Vertical high density cable manager. Fits between 19" rails and side panels on 800 mm wide models. (1pc)	•	n/a
H	RAHDVCMK48USU	48U Vertical high density cable manager. Fits between 19" rails and side panels on 800 mm wide models. (1pc)	•	n/a
I	RAPK610BU	Plinth Panel Kit 600W 1000D - BLK	•	n/a
I	RAPK810BU	Plinth Panel kit 800W 1000D - BLK	•	n/a

Image			Load Rating	Min Depth	Max Depth
J	ETN-MS40BU	2U cantilever shelf, 19" mount.	15 kg	400 mm	na
K	ETN-SDFS1U40BU	1U Fixed depth shelf, 19" mount.	50 kg	400 mm	400 mm
L	ETN-LDATSV70BU	1U Sliding shelf, 19" mount.	45 kg	700 mm	700 mm
	ETN-HDFS1U60BU	Shelf - 19" Heavy-Duty fixed 1U x 600D	100 kg	600 mm	600 mm