




Product designation			
Product type designation			
Description			Rigid SM1 breaker-contactor connections
Accessories for			SM1X
			Rigid SM1P breaker - BF09..25A contactor connections.
			SM1P...
Operational characteristics			
IEC maximum current (Imax)		A	25
Mechanical features			
Operating position		normal	Other
Weight		g	35
Dimensions			

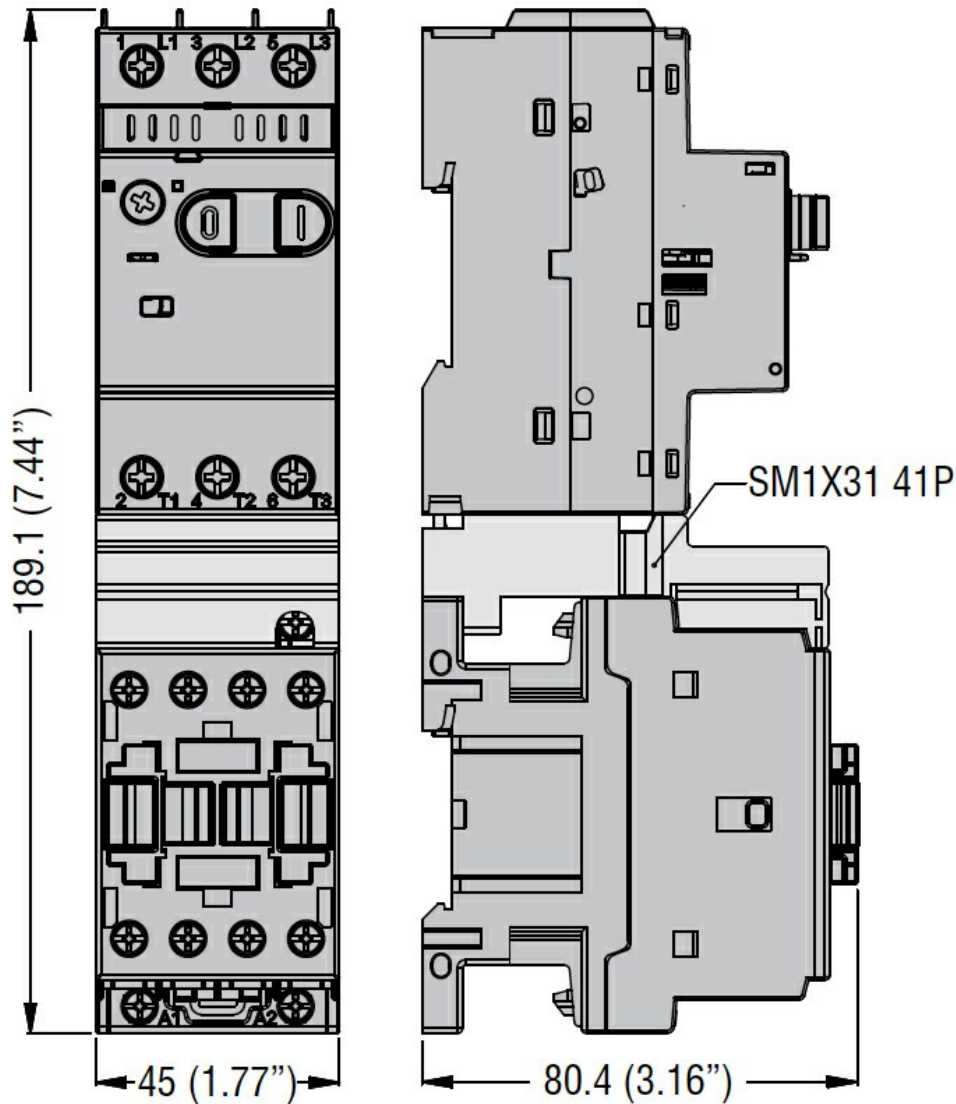

Certifications and compliance

Compliance

CSA C22.2 n° 14
 IEC/EN 60947-1
 IEC/EN 60947-5-1
 UL508

Certificates

cULus
 EAC

ETIM classification