


Product Description:

Projecteur trois circuits réglables avec adaptateur rail mince. Disponible en angle de faisceau de 24° et 36° avec LEDs délivrant jusqu' 94lm/W. Disponible en noir et blanc, le boîtier en aluminium permet une excellente dissipation de la chaleur et dispose d'un réglage horizontal de 315° et d'un réglage rotatif de 280°.


Product Image:



Line Drawing

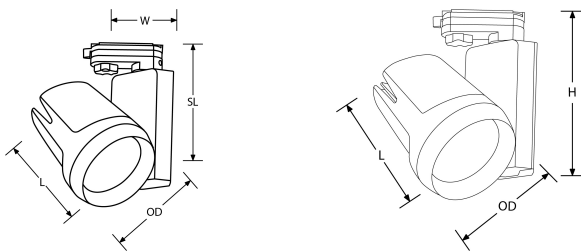

Polar Curve

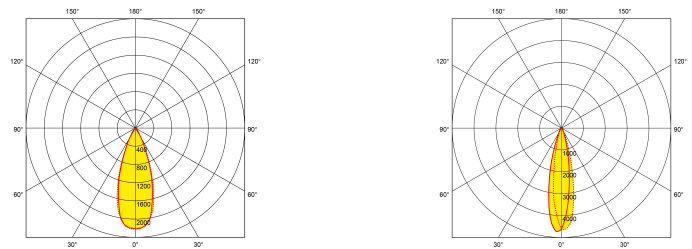

Product Specs:

Technology	LED	Input Voltage	220-240V AC
Positional Adjustment	Orientable	Number of LEDs	1
Lifetime L70 (hrs)	50000	Input Frequency	50/60HZ
Dimmable	Non	Dali	Non
IP Rating	IP20	IK Rating	IK08
Power Factor	0.9	Overall Diameter (mm)	105
Height (mm)	215	Length (mm)	128
Width (mm)	158	Weight (Kg)	0.848

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-TK3524BLK/40	35	24	3290	94	80	4000	Noir
EN-TK3524W/40	35	24	3290	94	80	4000	Blanc
EN-TK3536BLK/40	35	36	3290	94	80	4000	Noir
EN-TK3536W/40	35	36	3290	94	80	4000	Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office
Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1727 83 66 11