




**CARACTERISTIQUES ELECTRIQUES
ELECTRICAL CHARACTERISTICS**


Type	Rechargeable Nickel Metal Hydride	
IEC Designation	2/3 A High Discharge	
Plot / Top	FT	
Tension nominale / Nominal voltage	1.2V	
Tension mini en décharge / Mini discharge voltage	1V	
Charge standard 16h	140 mA (0.1C)	
Capacité nominale / Nominal Capacity	1400 mAh	
Capacité mini / Minimal Capacity	1400 mAh	
Cycle life at 80% DOD (0,5C)	> 500 (IEC standard)	
Resistance Interne / Internal Impedance (at 1000hz)	< 8 mΩ	
Température d'usage / Ambient temperature	Charge / Charging	0 to 45°C
	Décharge / Discharging	-20 to 50°C
Temperature de stockage / Storage temperature	-20 to 45°C (Humidity: 65 ± 20%)	
Charge de maintient / Trickle charge	(0.05C)~(0.1C)	

**CARACTERISTIQUES PHYSIQUES
PHYSICAL CHARACTERISTICS**


Accumulateur / Battery	
Dimension (mm)	28.5 x 16.8 (+/- 1)
Poids / Weight (g.)	23.5

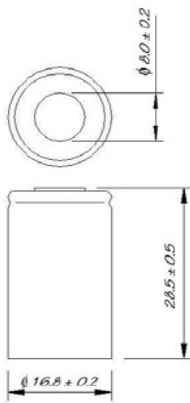

**Fast Charge (Charge Control required)
Voltage(V)**

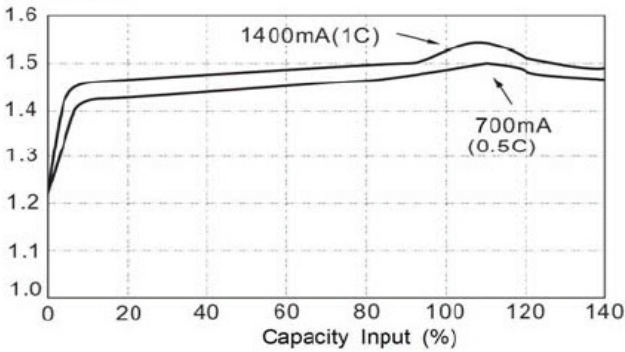

**Low Rate Discharge
Voltage(V)**

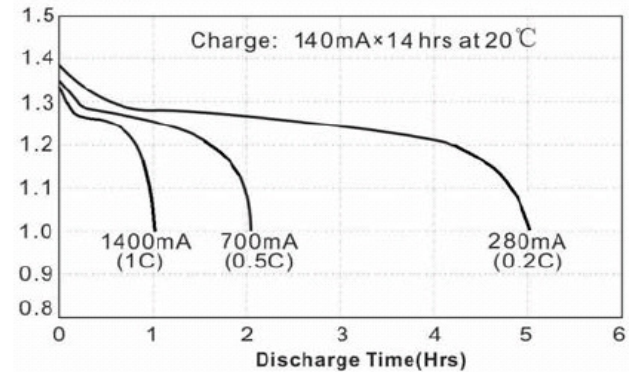

**High Rate Discharge
Voltage (V)**

