



Product Description:

Reconnue pour sa grande polyvalence, la génération C des dalles LED E6060™, E1230™ et E1260™ convient la plupart des applications tertiaires, administratives ou commerciales. Son guide de lumire et son diffuseur ont été conçus pour allier une trs bonne efficacité lumineuse une excellente uniformité d'éclairage. Installation en encastré, en saillie ou en suspension.


Product Image:

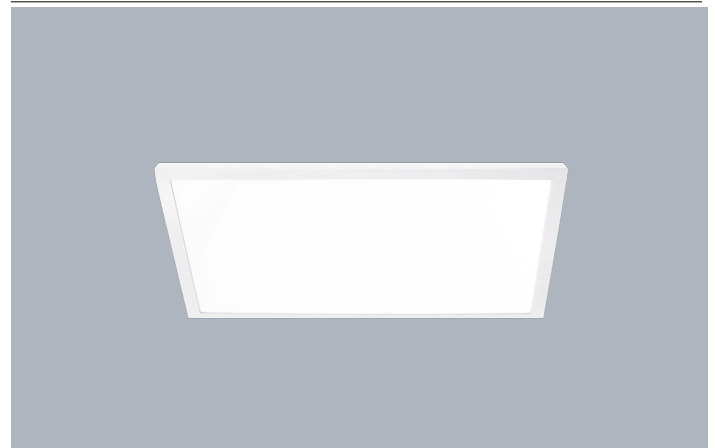

Line Drawing

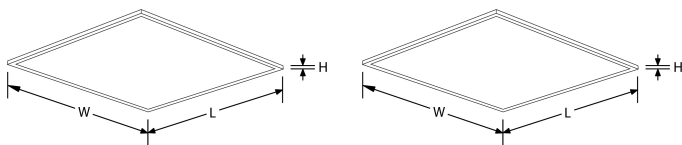

Polar Curve

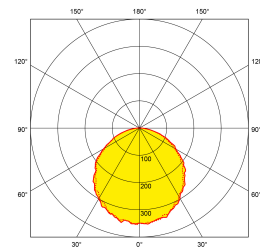

Product Specs:

Technology	LED	Input Voltage	220-240V AC
Lamp Base	Aucun	Positional Adjustment	Fixe
Number of LEDs	120	Lifetime L70 (hrs)	30000
Input Frequency	50/60HZ	Dimmable	Non
Dali	Non	IP Rating	IP20
Operating Env. Temp. (Min) °C	-20°C	Operating Env. Temp. (Max) °C	40°C
Optic Material	Polystyrne	Power Factor	0.9
Height (mm)	10	Length (mm)	595
Width (mm)	595	Weight (Kg)	2.529

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-FP6060C/30	36	110	3200	89	80	3000	RAL9016
EN-FP6060C/40	36	110	3400	95	80	4000	Blanc
EN-FP6060C/50	36	110	3400	95	80	5000	Blanc
EN-FP6060CDA/30	36	110	3200	89	80	3000	RAL9016
EN-FP6060CDA/40	36	110	3400	95	80	4000	Blanc
EN-FP6060CDA/50	36	110	3400	95	80	5000	Blanc
EN-FP6060CV/30	36	110	3200	89	80	3000	RAL9016
EN-FP6060CV/40	36	110	3400	95	80	4000	Blanc
EN-FP6060CV/50	36	110	3400	95	80	5000	Blanc

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office
Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1727 83 66 11