


8714 CV

CHARGER FOR LEAD ACID BATTERIES



- | | |
|---|--|
| * Konstantspenningslader for blybatterier | * <i>Constant voltage charger for lead batteries</i> |
| * Maks. ladestrøm 340 mA | * <i>Max. charge current 340 mA</i> |
| * Egnet for lading av mindre forseglede blybatterier. | * <i>Suitable for charging of small, sealed lead batteries.</i> |
| * Lineær | * <i>Linear</i> |
| * Termosikring i transformator, termisk beskyttelse i regulator, polvendings- og kortslutningsikker | * <i>Thermal fuse in transformer, thermal protection in regulator, protected against reversed polarity and short circuit proof</i> |
| * Plugg-inn enhet (europlugg) | * <i>Plug-in unit (europlug)</i> |
| * LED indikerer lading | * <i>LED indicates charging</i> |
| * Tilfredsstiller gjeldende EU direktiver | * <i>Complies with the relevant EU directives</i> |
| * CE-merket | * <i>CE-marked</i> |

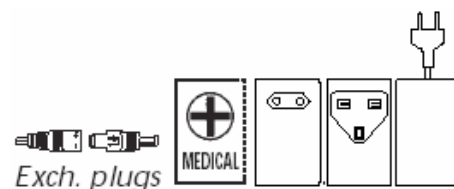

Tekniske data

Inngangsspenning:
Ladespenning:
Ladestrøm:
Strømtrekk fra batteri ved frakoblet nett:
Temperaturområde:
Strømbegrensning:
Isolasjonsklasse:
Elektrisk sikkerhetsstandard:
EMC standarder
* Emisjon:
* Immunitet:
Utgangsterminaler
* Sek. ledning med/uten plugg:
Mål uten plugg (LxBxH):
Vekt:

Technical specifications

Input voltage: 230 VAC +6/-10%, 50/60Hz
Charging voltage: 29,4 VDC*
Charge current: Max. 340 mA
Leakage current from battery when mains switched off: < 0,1 mA
Temperature range: -10°C-+40°C
Current limiting: 340 mA
Insulation class: II
Electrical safety standard: EN 60065, EN 60950
EMC standards
* *Emission:* EN 50081-1
* *Immunity:* EN 50082-1
Output terminals
* *Cord with/without plug:* Tilbehør/Accessories
Dimensions without plug (LxWxH): 100 x 51 x 63 mm
Weight: 0,45 kg

Please note, this charger can upon request be supplied in a version that fulfills the medical standard (EN60601), but the unit has not been tested externally.

* Enheten er innvendig justerbar og ved vedlikeholdslading bør spenningen justeres ned til 27,2-27,8V. Det er vanligvis anbefalt å lade 24V blybatterier med 29,2-30V ved daglig bruk. Skulle det være usikkerhet m.h.t. et bestemt batteri, anbefaler vi at man kontakter batteriproducent eller leverandør. Kan på bestilling leveres med andre utgangsspenninger.

* *The unit is internally adjustable and at float charge the voltage should be adjusted to 27,2-27,8V. In cycle use it's recommended to charge 24V batteries with 29,2-30V. If there should be any doubt about the charging condition for a particular battery, contact the battery manufacturer or supplier for more information. Can on request be delivered with other output voltages.*