


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

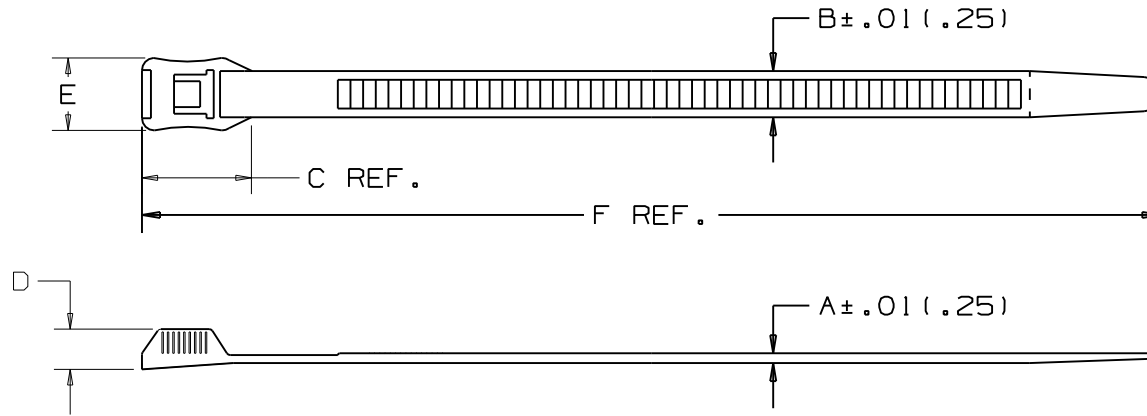

PANDUIT PART NO.	BUNDLE DIA.		A in (mm)	B in (mm)	C in (mm)	D in (mm)	E in (mm)	F in (mm)	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)									
HV940	.33 (8)	1.57 (40)	.065 (1.7)	.350 (8.9)	.82 (20.8)	.30 (7.6)	.556 (14.1)	6.8 (173)	124 (552)	LIGHT HEAVY	.61 (277)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

HYPER-V IN-LINE TIE

UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:
(.X) ± ---- (.XXX) ± .020(.51)
(.XX) ± .02(.5) ANGLES ± ----

UNLESS OTHERWISE SPECIFIED,
ALL DIMENSIONS ARE GIVEN
IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY
ERW

MAT'L:

SCALE
NONE

DATE
5/23/06

NYLON 6.6

DRAWING NO.

SS-27514

DWG
A
SIZE

2	6/2/06	MJVE		CORRECTED MIN BUNDLE DIAMETER	27514	2					
REV	DATE	BY	CHK	DESCRIPTION	ECN	R	CUST	SUP			