


Part number

PN 1663 PV



Mobile socket outlet, PLUSO LS-TYPE series, 2 poles + PE, 6 h (blue), 16 A, 200 ÷ 250 V

Product description

Product type	Socket Mobile
Series	PN...PV, PLUSO LS-TYPE
N. of poles	2 poles + 
Clock position	6

Technical data

Current	16 A
Voltage	200 ÷ 250 V
IP degree of protection	IP44

Further technical details

Weight	129,50 g
Operating temperature range (min, max)	-25°C ... +40°C

Material properties

Colour	RAL 9005 black
RoHs conformity	Compliant with exemption 6(c): copper alloy containing up to 4% lead by weight
China RoHs - EFUP	50
REACH SVHC substances	Yes Lead
SCIP number	Ca7de37f-add8-4b77-9861-279c94903ade

Approvals / Standards

Reference standard	EN 60309-1 and -2
---------------------------	-------------------

General ordering information

EAN13 code	8015747079808
-------------------	---------------

Packaging Information

Packaging length	400,00 mm
Packaging height	410,00 mm
Packaging width	400,00 mm
Packaging weight	13,35 kg
Packaging volume	65,60 dm ³
Packaging description	Carton box
Packaging quantity	100 Pcs
Packaging EAN code	8015747080064


Part number

PN 1663 PV



Catalogue drawings

(16A) PN ... PV

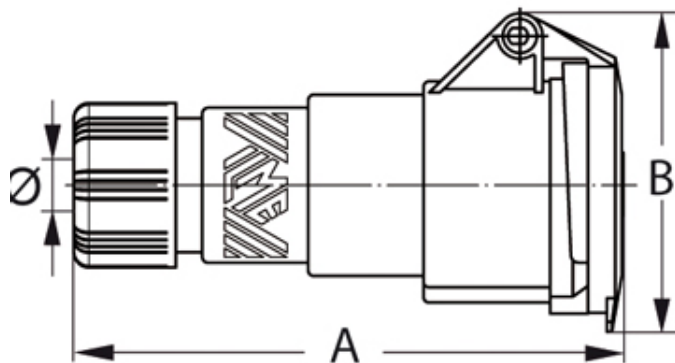

PN...PV	A	B	Ø min	Ø max
16A 2P+⊕	146	74,5	7	16
3P+⊕	146	84,5	7	16
3P+N+⊕	146	92,5	8	24

Notes

PN...SV/PV

- PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black
- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland
- Compliant with EN 60309-1 and -2
- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material
- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Terminals with retained screws
- IP44 degree of protection (EN 60529)

- PN...SV types 16A (IP44), entry with cable gland colour RAL 9005 black, enclosure colour RAL 9005 black
- PN...PV types 16A (IP44), enclosure and spring lid colour RAL 9005 black, entry with cable gland
- Compliant with EN 60309-1 and -2
- PN...SV types, enclosure and insert in insulating, thermoplastic, self-extinguishing material
- PN...PV types, enclosure, insert and spring lid in insulating, thermoplastic, self-extinguishing material
- Terminals with retained screws
- IP44 degree of protection (EN 60529)

Dimensions shown in mm are not binding and may be changed without notice.