




A system of command and control wireless devices based on Zigbee technology that offers innovative solutions for the renovation of buildings, minimizing the structural interventions. Zigbee is a safe and reliable system because the data exchanged are encrypted and every node of the network always ensures reachability among all the devices (mesh network). The Zigbee devices enrich the range of home&building automation solutions by Gewiss and can be managed via App, with smartphone and tablet, through the Smart Gateway.

Catégorie	Roller shutters actuator	Protocole de communication	Zigbee (IEEE 802.15.4)
Tension d'alimentation	230V ca - 50 Hz	Courant max distribué	6A-230V ca (selon 60669-2-1)
Output power	8 dBm	Puissance max dissipée (W)	2,3 W
Puissance max. moteur	500 W	Norme	2014/53/EU
Indice de protection	IP20	Température de fonctionn.	-5 ÷ +45 °C
Température de stockage	-25 ÷ +70 °C	Relative humidity (non-condensative)	Max 93%
Dimensions LxHxP (mm)	42x40x20	Electrocod	051A

DIMENSIONS

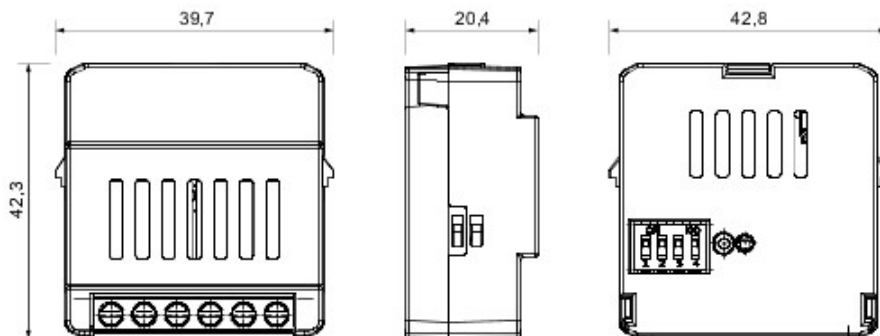

SYMBOLE TECHNIQUE

IP

IP20

NORMES ET HOMOLOGATIONS

