

SUPER H3

Up to 30% more light



Up to 30% more light

For better visibility and shorter reaction times compared to standard halogen lamps




Enhanced illumination

For extra confidence



Convincing price-performance ratio

For better visibility at a reasonable price

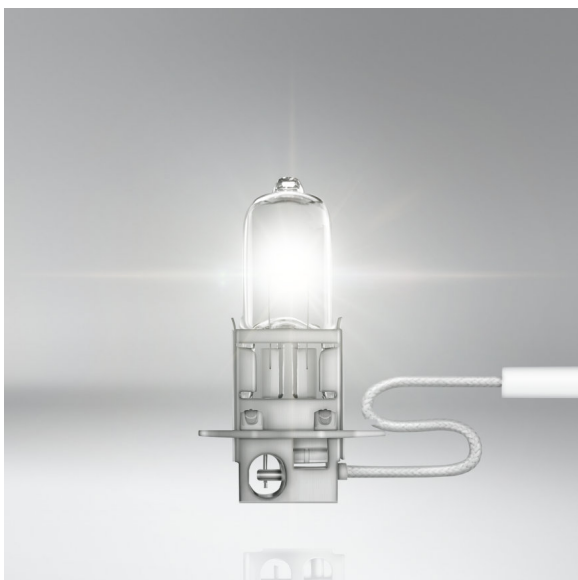

Up to 30% more light on the road

SUPER headlight lamps offer more performance for the most important lamp types. With up to 30% more light compared to standard lamps, signs, obstacles and hazards are more rapidly recognized.

Product datasheet

Technical data

Product information

Order reference	64151SUP
Application (Category and Product specific)	Halogen headlight lamp

Electrical data


Power input	68 W ¹⁾
Nominal voltage	12.0 V
Nominal wattage	55.00 W
Test voltage	13.2 V

¹⁾ Maximum

Photometrical data

Luminous flux	1600 lm
Luminous flux tolerance	±15 %

Dimensions & weight

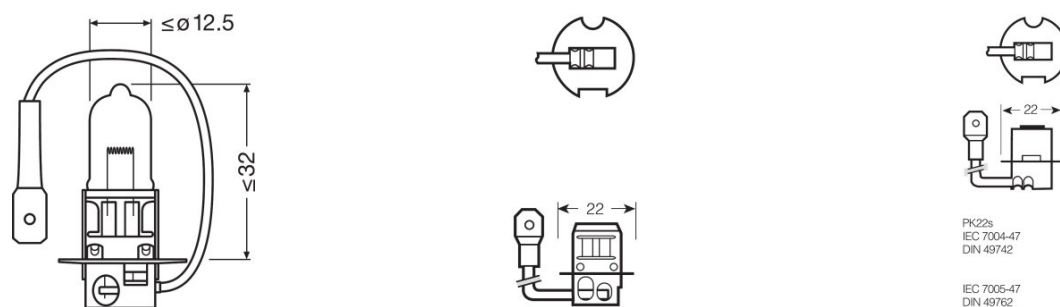

Diameter	12.0 mm
Product weight	6.40 g
Length	42.0 mm

Lifespan

Lifespan B3	150 h
Lifespan Tc	350 h

Additional product data

Base (standard designation)	PK22s
-----------------------------	-------

Product datasheet

Capabilities

Technology	HAL
------------	-----

Certificates & standards

ECE category	H3
--------------	----

Country specific categorizations

Order reference	64151SUP
-----------------	----------

Country specific information

Product code	METEL code	SEG-No.	STK-Number	UK Org
4050300504445	OSRA64151SUPER	-	-	-
4050300504452	OSRA64151SUPER	-	-	-
4050300504445	OSRA64151SUPER	-	-	-

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4050300504445	SUPER H3	Folding carton box 1	25 mm x 23 mm x 70 mm	0.04 dm ³	8.40 g
4050300504452	SUPER H3	Bundle 10	113 mm x 71 mm x 53 mm	0.43 dm ³	88.00 g
4050300504469	SUPER H3	Shipping carton box 100	361 mm x 109 mm x 122 mm	4.80 dm ³	970.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.



OSRAM