


Photo

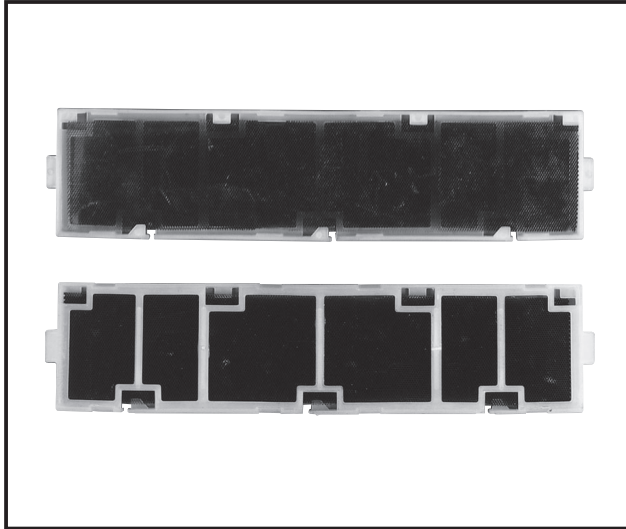

Descriptions

The catalyst coating on the honeycomb-structured frame captures small foul-smelling substances in the air, then breaks down the source of the odors with the power of the ozone generated in a plasma electrode unit.

Applicable Models


- MSZ-FH25VE2
- MSZ-FH35VE2
- MSZ-FH50VE2

Specifications

Material	Filter: Aluminium Catalyst: MnO ₂ , SiO ₂ Frame: Polypropylen
Color (Filter)	Black


Dimensions

Unit : mm

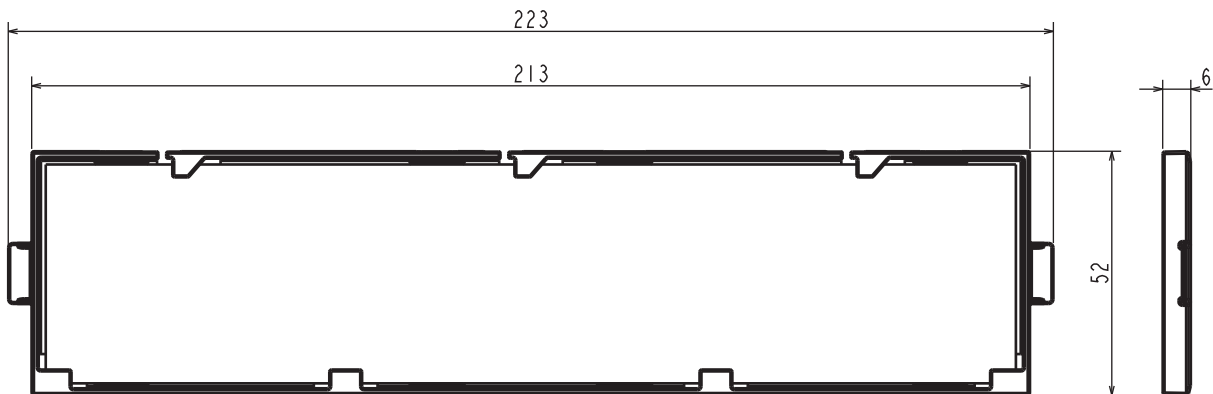


How to Use / How to Install

Replacement of the air cleaning filter



1. Lift the front panel until a "click" is heard.
2. (1) Remove the air filter.
(2) Remove the air cleaning filter.
(3) Install a new air cleaning filter.
(4) Install the air filter.
3. Close the front panel securely and press the positions indicated by the arrows.




Every 3 months:

- Remove dirt by a vacuum cleaner, or soak the framed filter in lukewarm water (30 to 40°C) for about 15 minutes. Rinse well.
- After washing, dry it well in shade.
- Deodorizing feature recovers by cleaning the filter.

When dirt or smell cannot be removed by cleaning:

- Replace it with a new air cleaning filter.



Pull to remove from the air filter

OPTIONAL PARTS

INDOOR UNIT