
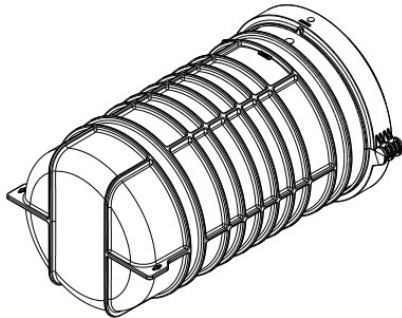
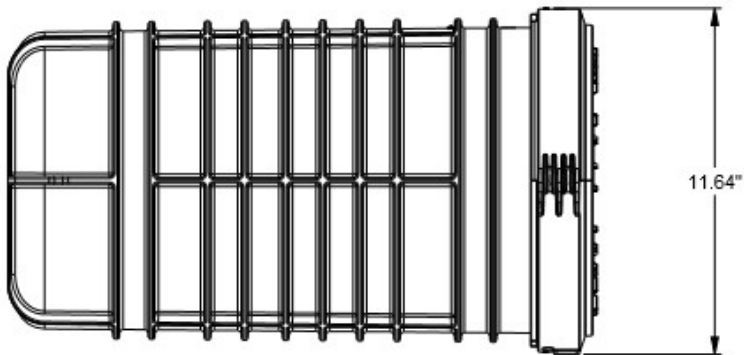


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
OFCD9519BF	16.0 LB (7.26 kg)

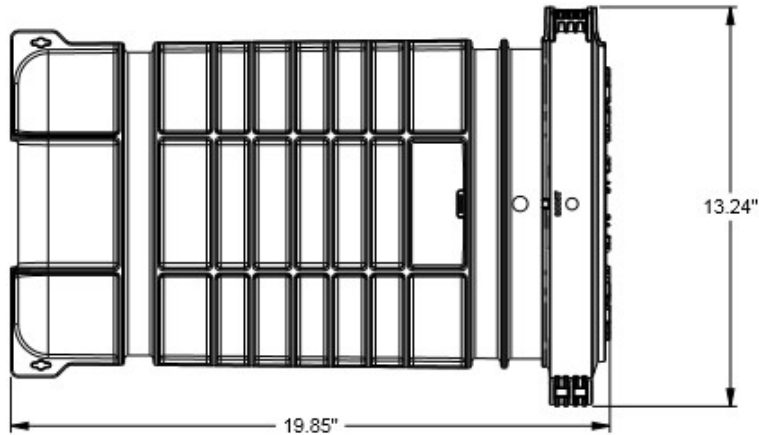

NOTES:

- VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A LIST OF CURRENT PARTS APPLICABLE FOR USE WITH THIS PRODUCT.
- PART FEATURES:
 - Max. Splice Capacity: 288 Single Fiber Fusion Splices
 - Application: Direct buried or below grade.
 - Internal organizer manages buffer tube
 - Factory installed gasket allows re-entry and re-use
 - Grommet Kit included with (2) grommets for each p/n
 - (2) 1-Hole 0.60"-0.85" Grommet, or
 - (2) 1-Hole 0.85"-1.00" Grommet
 - Flexible grommet sealing technology supports a wide range and quantity of flat or round cable profiles
 - Tested in accordance to GR-771-CORE by an independent outside lab
 - Integrated air valve to confirm seal integrity
 - Quick to assemble, no special tools required
 - Supports single fiber fusion or mechanical splices within one closure
- Splice tray sold separately.

TITLE										OUTDOOR DOME FIBER CLOSURE (9.5 X 19)																			
										CUSTOMER DRAWING																			
ITEM REVISION NAME					00271CCD/00										PANDUIT														
DATASET FILE NAME					00271CCD_DC/00A																								
										THIRD ANGLE PROJECTION																			
MATERIAL										N/A										DRAWING NUMBER					00271CCD-DC				
DRAWN BY		DATE		CHK		SCALE				SHEET 1 OF 1		A																	
JBO		11/12/19		TMSE		NONE																							

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00A	11/12/19	JBO	TMSE	ASY	INITIAL RELEASE	00271CCD

A-SIZE CUSTOMER