


MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)


CR-2330




SPECIFICATIONS

Name	CR-2330
Nominal voltage (V)	3
Nominal capacity (mAh)	265
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	3.8


DISCHARGE TEMPERATURE CHARACTERISTICS

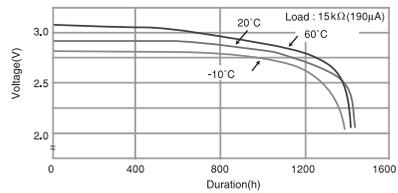


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

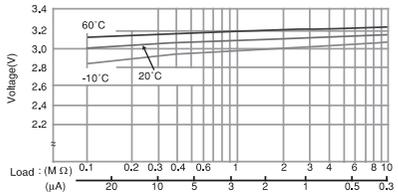

CAPACITY VS. LOAD RESISTANCE

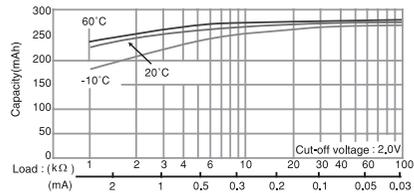


CR-2354




SPECIFICATIONS

Name	CR-2354
Nominal voltage (V)	3
Nominal capacity (mAh)	560
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	5.8


DISCHARGE TEMPERATURE CHARACTERISTICS

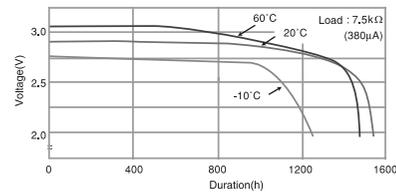

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

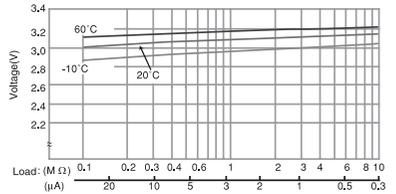


CAPACITY VS. LOAD RESISTANCE

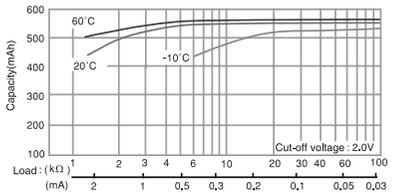

MANGANESE DIOXIDE LITHIUM BATTERIES (CR SERIES)


CR-2412




SPECIFICATIONS

Name	CR-2412
Nominal voltage (V)	3
Nominal capacity (mAh)	100
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	2.0


DISCHARGE TEMPERATURE CHARACTERISTICS

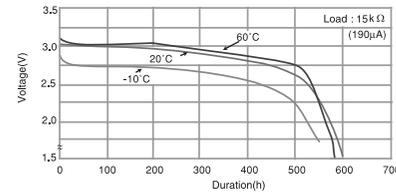


OPERATING VOLTAGE VS. DISCHARGE CURRENT*

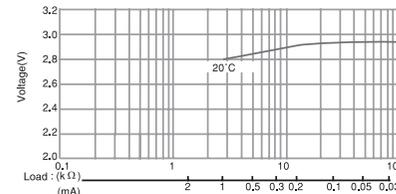

CAPACITY VS. LOAD RESISTANCE

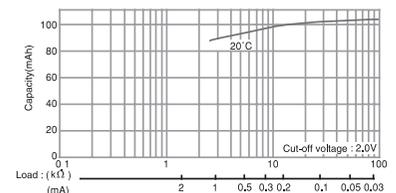


CR-2450




SPECIFICATIONS

Name	CR-2450
Nominal voltage (V)	3
Nominal capacity (mAh)	620
Continuous drain (mA)	0.2
Operating temperature (°C)	-30 to +60
Weight (g)	6.3

DISCHARGE TEMPERATURE CHARACTERISTICS

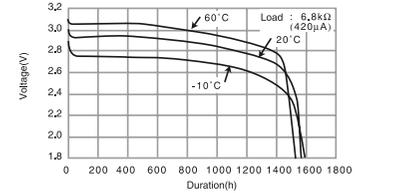

OPERATING VOLTAGE VS. DISCHARGE CURRENT*

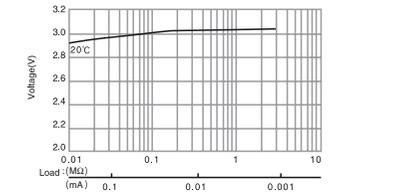

CAPACITY VS. LOAD RESISTANCE

