



# DFS60I-BHCN02048

DFS60

INCREMENTAL ENCODERS

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type             | Part no. |
|------------------|----------|
| DFS60I-BHCN02048 | 1120491  |

Other models and accessories → [www.sick.com/DFS60](http://www.sick.com/DFS60)

### Detailed technical data

#### Performance

|   |                                     |
|---|-------------------------------------|
| <b>Pulses per revolution</b>                              | 2,048 <sup>1)</sup>                 |
| <b>Measuring step</b>                                     | 90°, electric/pulses per revolution |
| <b>Measuring step deviation at binary number of lines</b> | ± 0.008°                            |
| <b>Error limits</b>                                       | ± 0.03°                             |

<sup>1)</sup> See maximum revolution range.

#### Interfaces

|                                       |                        |
|---------------------------------------|------------------------|
| <b>Communication interface</b>        | Incremental            |
| <b>Communication Interface detail</b> | TTL / RS-422           |
| <b>Number of signal channels</b>      | 6-channel              |
| <b>Initialization time</b>            | 40 ms                  |
| <b>Output frequency</b>               | ≤ 820 kHz              |
| <b>Load current</b>                   | ≤ 30 mA                |
| <b>Operating current</b>              | 40 mA (without load)   |
| <b>Power consumption</b>              | ≤ 0.5 W (without load) |
| <b>Load resistance</b>                | ≥ 120 Ω                |

#### Electrical data

|                                    |   |
|------------------------------------|---|
| <b>Connection type</b>             | Cable, 8-wire, radial, 10 m                 |
| <b>Supply voltage</b>              | 10 ... 32 V                                 |
| <b>Reference signal, number</b>    | 1   |
| <b>Reference signal, position</b>  | 90°, electric, logically gated with A and B |
| <b>Reverse polarity protection</b> | ✓   |

<sup>1)</sup> Short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40°C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

|  |  |
|--|--|
| <b>Short-circuit protection of the outputs</b> | ✓ <sup>1)</sup>                          |
| <b>MTTFd: mean time to dangerous failure</b>   | 300 years (EN ISO 13849-1) <sup>2)</sup> |

<sup>1)</sup> Short-circuit opposite to another channel or GND permissible for maximum 30 s.

<sup>2)</sup> This product is a standard product and does not constitute a safety component as defined in the Machinery Directive. Calculation based on nominal load of components, average ambient temperature 40 °C, frequency of use 8760 h/a. All electronic failures are considered hazardous. For more information, see document no. 8015532.

## Mechanical data

|                                       |   |
|---------------------------------------|---|
| <b>Mechanical design</b>              | Blind hollow shaft                      |
| <b>Shaft diameter</b>                 | 15 mm                                   |
| <b>Weight</b>                         | + 0.5 kg                                |
| <b>Shaft material</b>                 | Stainless steel V2A                     |
| <b>Flange material</b>                | Stainless steel V2A                     |
| <b>Housing material</b>               | Stainless steel V2A                     |
| <b>Start up torque</b>                | 1 Ncm (+20 °C)                          |
| <b>Operating torque</b>               | 0.5 Ncm (+20 °C)                        |
| <b>Permissible movement static</b>    | ± 0.3 mm (radial)<br>± 0.5 mm (axial)   |
| <b>Permissible movement dynamic</b>   | ± 0.05 mm (radial)<br>± 0.01 mm (axial) |
| <b>Operating speed</b>                | ≤ 6,000 min <sup>-1</sup> <sup>1)</sup> |
| <b>Moment of inertia of the rotor</b> | 40 gcm <sup>2</sup>                     |
| <b>Bearing lifetime</b>               | 3.6 x 10 <sup>10</sup> revolutions      |
| <b>Angular acceleration</b>           | ≤ 500,000 rad/s <sup>2</sup>            |

<sup>1)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                      |  |
|--------------------------------------|--|
| <b>EMC</b>                           | According to EN 61000-6-2 and EN 61000-6-4                           |
| <b>Enclosure rating</b>              | IP67, housing side (IEC 60529)<br>IP67, shaft side (IEC 60529)       |
| <b>Permissible relative humidity</b> | 90 % (Condensation not permitted)                                    |
| <b>Operating temperature range</b>   | -40 °C ... +100 °C <sup>1)</sup><br>-30 °C ... +100 °C <sup>2)</sup> |
| <b>Storage temperature range</b>     | -40 °C ... +100 °C, without package                                  |
| <b>Resistance to shocks</b>          | 100 g, 6 ms (EN 60068-2-27)  |
| <b>Resistance to vibration</b>       | 10 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)                              |

<sup>1)</sup> Stationary position of the cable.

<sup>2)</sup> Flexible position of the cable.


## Classifications

|                     |          |
|---------------------|----------|
| <b>eCl@ss 5.0</b>   | 27270501 |
| <b>eCl@ss 5.1.4</b> | 27270501 |
| <b>eCl@ss 6.0</b>   | 27270590 |
| <b>eCl@ss 6.2</b>   | 27270590 |
| <b>eCl@ss 7.0</b>   | 27270501 |
| <b>eCl@ss 8.0</b>   | 27270501 |

|                       |          |
|-----------------------|----------|
| <b>eCI@ss 8.1</b>     | 27270501 |
| <b>eCI@ss 9.0</b>     | 27270501 |
| <b>eCI@ss 10.0</b>    | 27270501 |
| <b>eCI@ss 11.0</b>    | 27270501 |
| <b>eCI@ss 12.0</b>    | 27270501 |
| <b>ETIM 5.0</b>       | EC001486 |
| <b>ETIM 6.0</b>       | EC001486 |
| <b>ETIM 7.0</b>       | EC001486 |
| <b>ETIM 8.0</b>       | EC001486 |
| <b>UNSPSC 16.0901</b> | 41112113 |

### Dimensional drawing (Dimensions in mm (inch))

Blind hollow shaft

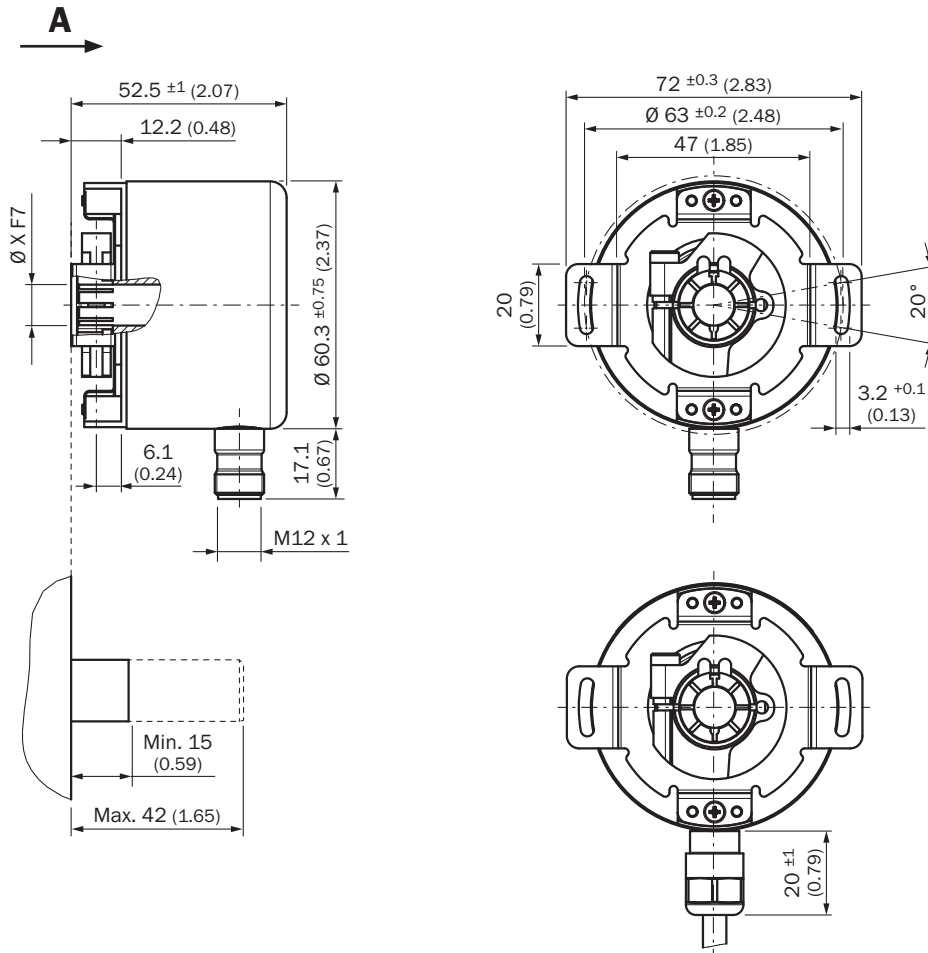


### PIN assignment



| Male connector M12, 8-pin | Connector M12, 12-pin | Wire colors (cable connection) | TTL/HTL signal      | Sin/Cos 1.0 V <sub>pp</sub> | Explanation   |
|---------------------------|-----------------------|--------------------------------|---------------------|-----------------------------|---|
| 1                         | 7                     | Brown                          | $\bar{A}$           | COS-                        | Signal wire   |
| 2                         | 6                     | White                          | A                   | COS+                        | Signal wire   |
| 3                         | 9                     | Black                          | $\bar{B}$           | SIN-                        | Signal wire   |
| 4                         | 8                     | Pink                           | B                   | SIN+                        | Signal wire   |
| 5                         | 4                     | Yellow                         | $\bar{Z}$           | $\bar{Z}$                   | Signal wire   |
| 6                         | 11                    | Purple                         | Z                   | Z                           | Signal wire   |
| 7                         | 12                    | Blue                           | GND                 | GND                         | Ground connection   |
| 8                         | 5                     | Red                            | +U <sub>S</sub>     | +U <sub>S</sub>             | Supply voltage  |
| -                         | 2                     | -                              | N.c.                | N.c.                        | Not assigned  |
| -                         | 3                     | -                              | N.c.                | N.c.                        | Not assigned  |
| -                         | 1                     | -                              | N.c.                | N.c.                        | Not assigned  |
| -                         | 10 <sup>1)</sup>      | -                              | O-SET <sup>1)</sup> | N.c.                        | Set zero pulse <sup>1)</sup>  |
| Screen                    | Screen                | Screen                         | Screen              | Screen                      | Screen connected to housing on encoder side. Connected to ground on control side. |


### Diagrams

#### Signal outputs

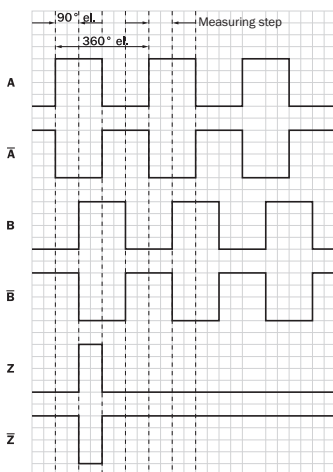

CW with view on the encoder shaft in direction “A”, compare dimensional drawing.


Maximum revolution range

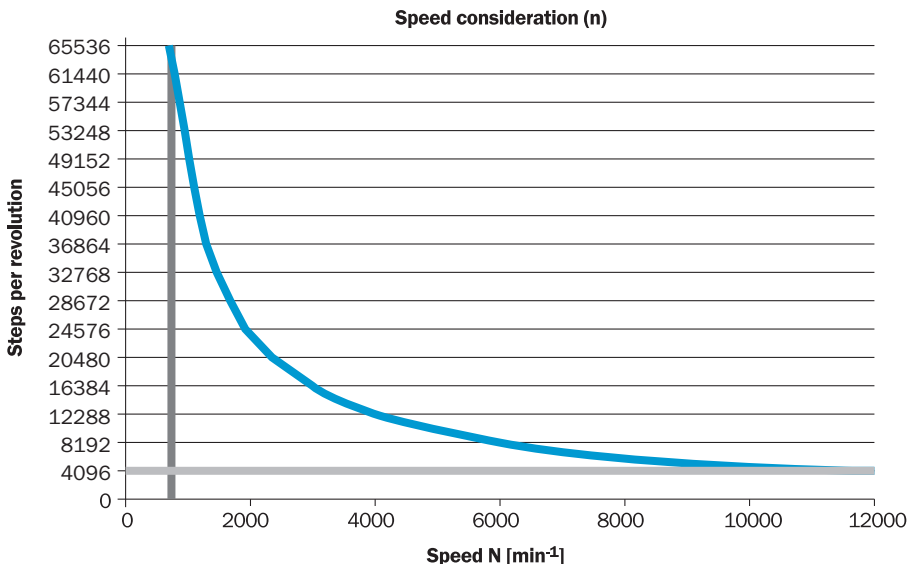

| Supply voltage  | Output |
|-----------------|--------|
| 4,5 V ... 5,5 V | TTL    |
| 10 V ... 32 V   | TTL    |
| 10 V ... 32 V   | HTL    |

### Recommended accessories

Other models and accessories → [www.sick.com/DFS60](http://www.sick.com/DFS60)

|   | Brief description   | Type          | Part no. |
|---|---|---------------|----------|
| <b>Flanges</b>  |   |               |          |
|  | Standard stator coupling  | BEF-DS00FX    | 2056812  |
| <b>Plug connectors and cables</b>   |   |               |          |
|  | Head A: male connector, M12, 8-pin, straight, A-coded<br>Cable: Incremental, shielded                       | STE-1208-GA01 | 6044892  |
|  | Head A: male connector, M23, 12-pin, straight<br>Cable: HIPERFACE <sup>®</sup> , SSI, Incremental, shielded | STE-2312-G01  | 2077273  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)