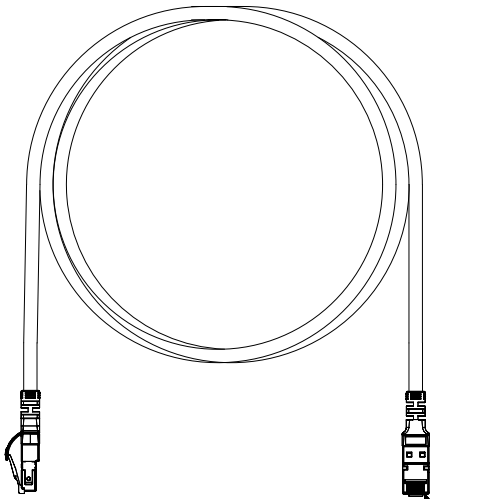


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. TERMINATED WITH (8 POSITION) S/FTP MODULAR PLUGS ON BOTH ENDS PER T568B.
2. CONSTRUCTED WITH 4-PR/26AWG STRANDED S/FTP CAT6A PATCH CABLE
3. MATERIAL:
 PLUG: POLYCARBONATE
 BOOT: THERMOPLASTIC RESIN
4. FLAMMABILITY RATING: LSZH RATED



PLUG POSITION 1



"XX" PART LENGTH TABLE	
PANDUIT P/N	LENGTH
S6XPC1M**	1 m
S6XPC1.5M**	1.5 m
S6XPC2M**	2 m
S6XPC2.5M**	2.5 m
S6XPC3M**	3 m
S6XPC3.5M**	3.5 m
S6XPC5M**	5 m
S6XPC10M**	10 m
S6XPC15M**	15 m

COLOR TABLE	
** CODE	COLOR
BU	BLUE
IG	INTERNATIONAL GRAY

XX = LENGTH
 ** = COLOR

T568B WIRING SCHEME

PLUG POSITION:	CABLE WIRE:
1	WHITE/ORANGE
2	ORANGE
3	WHITE/GREEN
4	BLUE
5	WHITE/BLUE
6	GREEN
7	WHITE/BROWN
8	BROWN

PART NUMBER		S6XPCXXM**	
TITLE		CATEGORY 6A S/FTP 26AWG LSZH SHIELDED PATCH CORD CUSTOMER DRAWING	
ITEM REVISION NAME		01175EBB/00	
DATASET FILE NAME		01175EBB_DC/00B	
 THIRD ANGLE PROJECTION			
MATERIAL		SEE NOTE 3	
DRAWING NUMBER		01175EBB-DC	
DRAWN BY	DATE	CHK	SCALE
BJN	1-30-23	MATO	NONE
SHEET 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00B	5-22-23	BJN	MATO	EHA	UPDATED	M09000TF
00A	1-30-23	BJN	MATO	EHA	RELEASED TO PRODUCTION	01175EBB-DC

A-SIZE CUSTOMER