





| | | | |
|---|------------------|-----|-----|
| Product designation | Empty enclosures | | |
| Product type designation | M25RA | | |
| Electrical features | | | |
| Maximum operating current ($\leq 440V$) | A | 38 | |
| Components | | | |
| Contact standard supplied | BF38A | | |
| Thermal relay to purchase separately | RF38 | | |
| Mechanical features | | | |
| Weight | g | 970 | |
| Ambient conditions | | | |
| Operating temperature | min | °C | -25 |
| | max | °C | +60 |
| Storage temperature | min | °C | -40 |
| | max | °C | +70 |
| Resistance & Protection | | | |
| Frontal IP degree | IP65 | | |
| Dimensions | | | |

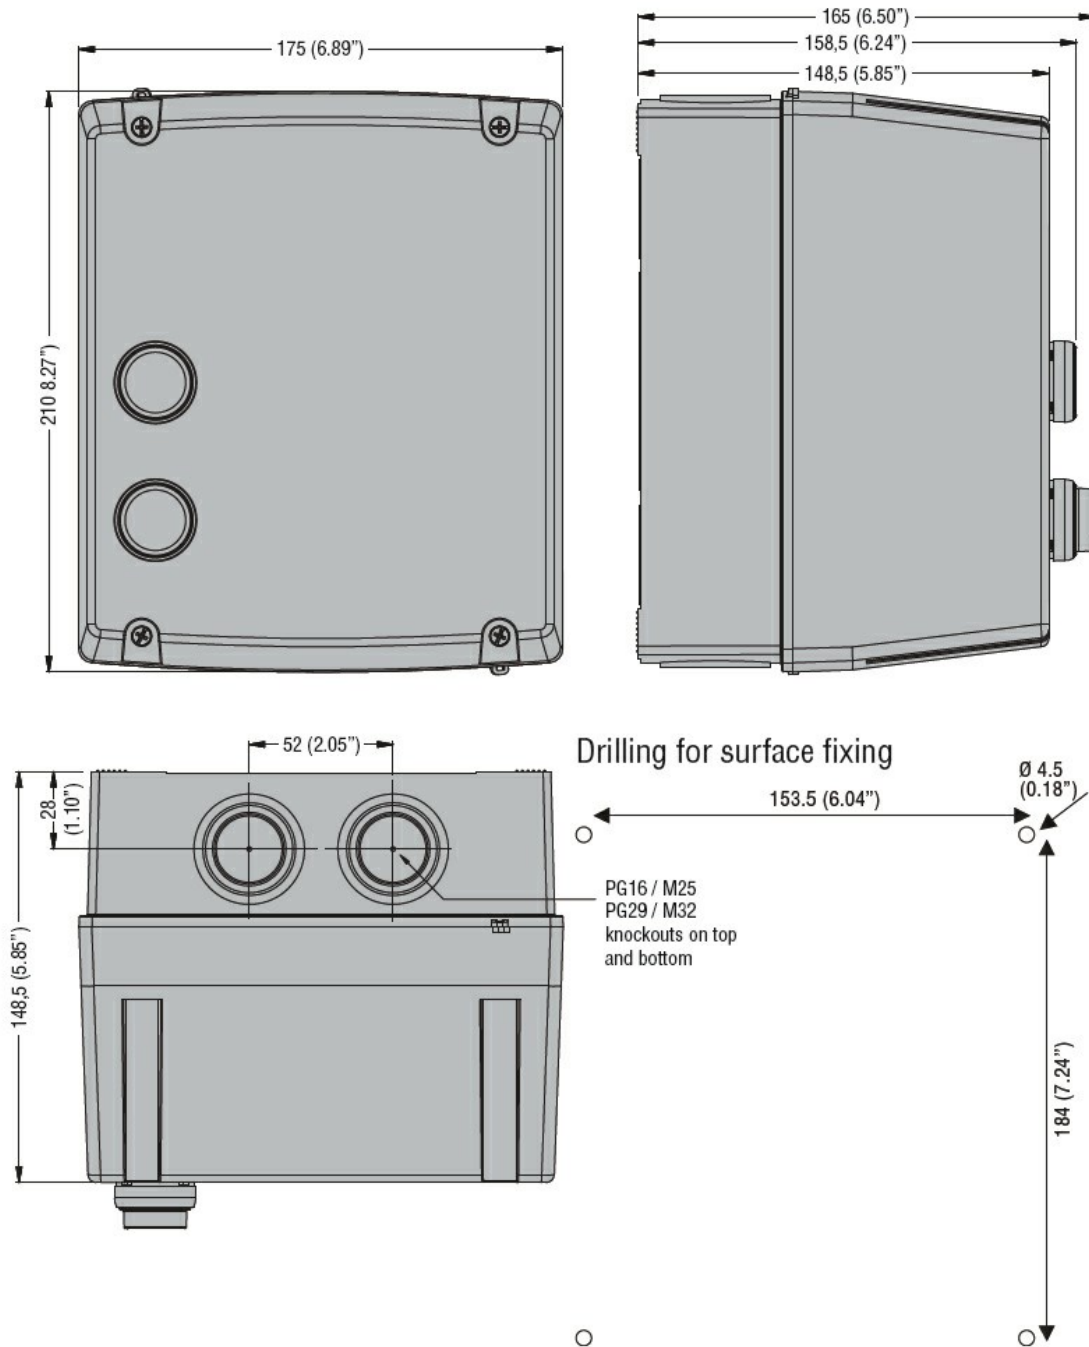

Wiring diagrams

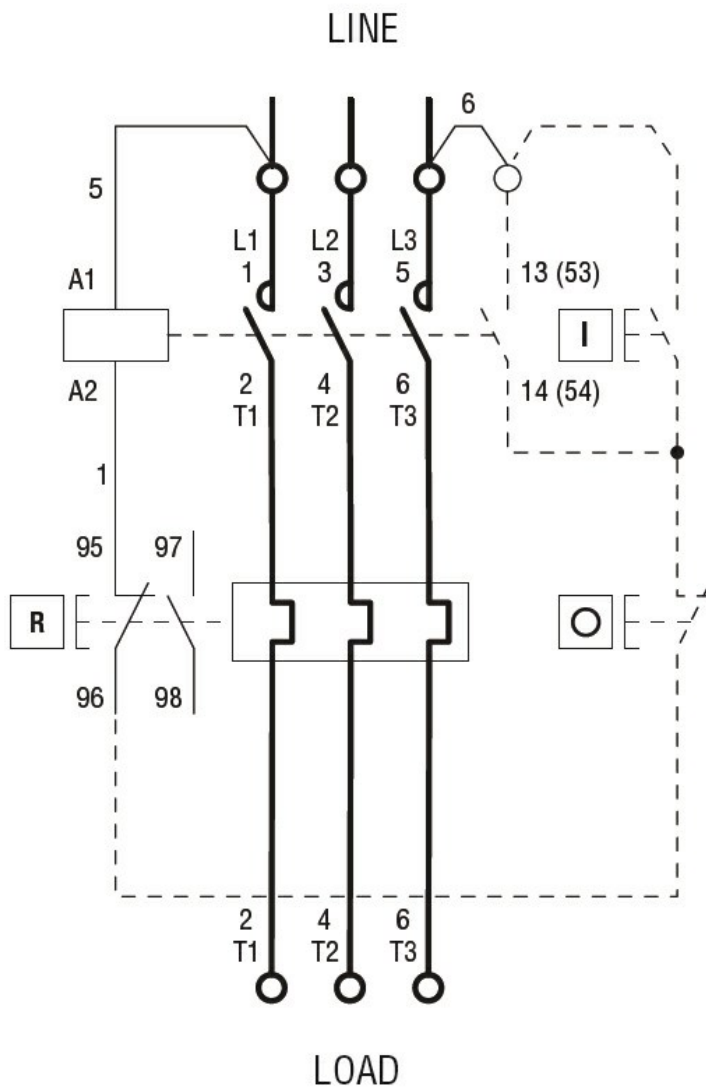

R = Reset; I = Start; O = Stop

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60947-1
IEC/EN 60947-4-1
UL508

Certificates

cULus

ETIM classification

ETIM 8.0

EC000200 -
Enclosure for
control circuit
devices