
 TECHNICAL DATA SHEET

Cable Tie, heat-stabilized

Ty-Rap®



Cable ties are primarily used to cinch wires and cables together to form a neat and organized bundle.

Certifications / Standards:


Features:


- 316 stainless steel barb is corrosion resistant and provides greater longevity
- Operating temperature range:
-60°C (-40°F) to 105°C (221°F)

Recommended Installation Tool:

- ERG120 / WT197 (MS90387-2)

Materials:

- Body - Heat-Stabilized natural 6,6 nylon

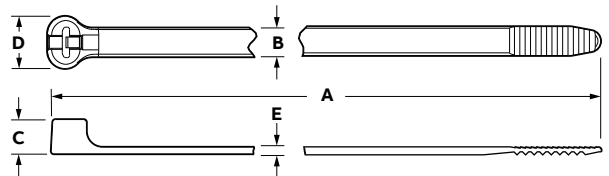

Product selection

Part no:	Max. bundle diameter inch (mm)	Tensile strength lbs. (N)	A inch (mm)	B inch (mm)	C inch (mm)	D inch (mm)	E inch (mm)	Installation Tool
TYH23M	0.63 (16)	18 (80)	3.6 (91)	0.09 (2.3)	0.15 (3.9)	0.19 (4.8)	0.04 (1)	ERG50 / 1-3
TYH24M	1.38 (35)	40 (180)	5.5 (140)	0.14 (3.6)	0.18 (4.6)	0.25 (6.4)	0.05 (1.3)	ERG50 / 3-5
TYH25M	1.89 (48)	49 (220)	7.3 (185)	0.18 (4.7)	0.22 (5.6)	0.32 (8.1)	0.05 (1.3)	ERG50 / 6-8
TYH26M	2.99 (76)	26 (120)	11.1 (282)	0.14 (3.6)	0.18 (4.6)	0.26 (6.6)	0.05 (1.3)	ERG50 / 3-5
TYH27M	4.02 (102)	120 (534)	13.6 (345)	0.27 (6.9)	0.32 (8.1)	0.48 (12.2)	0.06 (1.5)	ERG120 / 5-8
TYH28M	4.02 (102)	120 (534)	14.2 (360)	0.19 (4.2)	0.22 (5.6)	0.32 (8.1)	0.05 (1.3)	ERG50 / 6-8

Note: Product must be installed in accordance with applicable national and local electrical codes.