


Figure

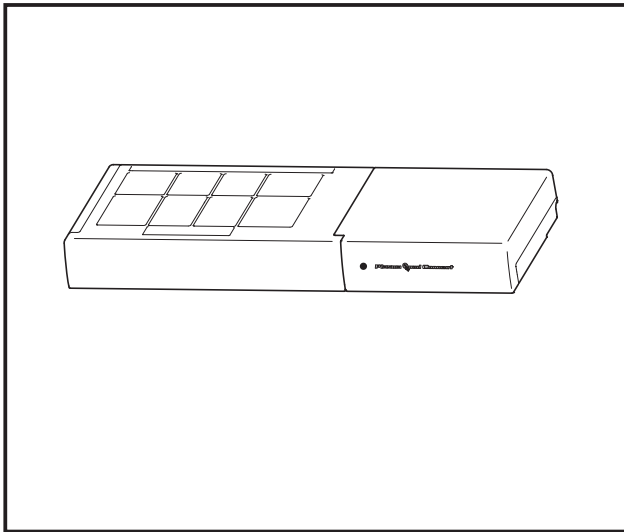

Descriptions

In the AIR PURIFYING operation, Plasma Quad Connect reduces airborne mold, viruses and allergens.

NOTE:

- Never touch the Plasma Quad Connect during operation. Although the Plasma Quad Connect is safety-conscious design, touching this device could be the cause of trouble as this device discharge high voltage electricity.
- A "hissing" sound may be heard during the Plasma Quad Connect operation. This sound is produced when plasma is being discharged. This is not a malfunction.

Applicable Models


- MSZ-FT25VG ■ MSZ-EF25VGB ■ MSZ-HR50VF ■ MSZ-DM25VA
 - MSZ-FT35VG ■ MSZ-EF25VGS ■ MSZ-HR60VF ■ MSZ-DM35VA
 - MSZ-FT50VG ■ MSZ-EF35VGW ■ MSZ-HR71VF
 - MSZ-AP15VG ■ MSZ-EF35VGB ■ MSZ-DW25VF
 - MSZ-AP20VG ■ MSZ-EF35VGS ■ MSZ-DW35VF
 - MSZ-AP25VG ■ MSZ-EF42VGW ■ MSZ-DW50VF
 - MSZ-AP35VG ■ MSZ-EF42VGB ■ MSY-TP35VF
 - MSZ-AP42VG ■ MSZ-EF42VGS ■ MSY-TP50VF
 - MSZ-AP50VG ■ MSZ-EF50VGW ■ MSZ-SF15VA
 - MSZ-AP60VG ■ MSZ-EF50VGB ■ MSZ-SF20VA
 - MSZ-AP71VG ■ MSZ-EF50VGS ■ MSZ-SF25VE3
 - MSZ-EF18VGW ■ MSZ-BT20VG ■ MSZ-SF35VE3
 - MSZ-EF18VGB ■ MSZ-BT25VG ■ MSZ-SF42VE3
 - MSZ-EF18VGS ■ MSZ-BT35VG ■ MSZ-SF50VE3
 - MSZ-EF22VGW ■ MSZ-BT50VG ■ MSZ-GF60VE2
 - MSZ-EF22VGB ■ MSZ-HR25VF ■ MSZ-GF71VE2
 - MSZ-EF22VGS ■ MSZ-HR35VF ■ MSZ-WN25VA
 - MSZ-EF25VGW ■ MSZ-HR42VF ■ MSZ-WN35VA
- S-series ceiling-concealed models
 - P-series ceiling-concealed models (except for PEA series)
 - P-series wall-mounted models

Specifications

Input voltage	Single phase 220 - 240V AC
Frequency	50/60Hz
Power consumption	4W
Size	56 × 499.5 × 168mm
Weight	1600g
Indoor unit connecting cable	Dedicated 5-wire cable

Dimensions

Unit : mm

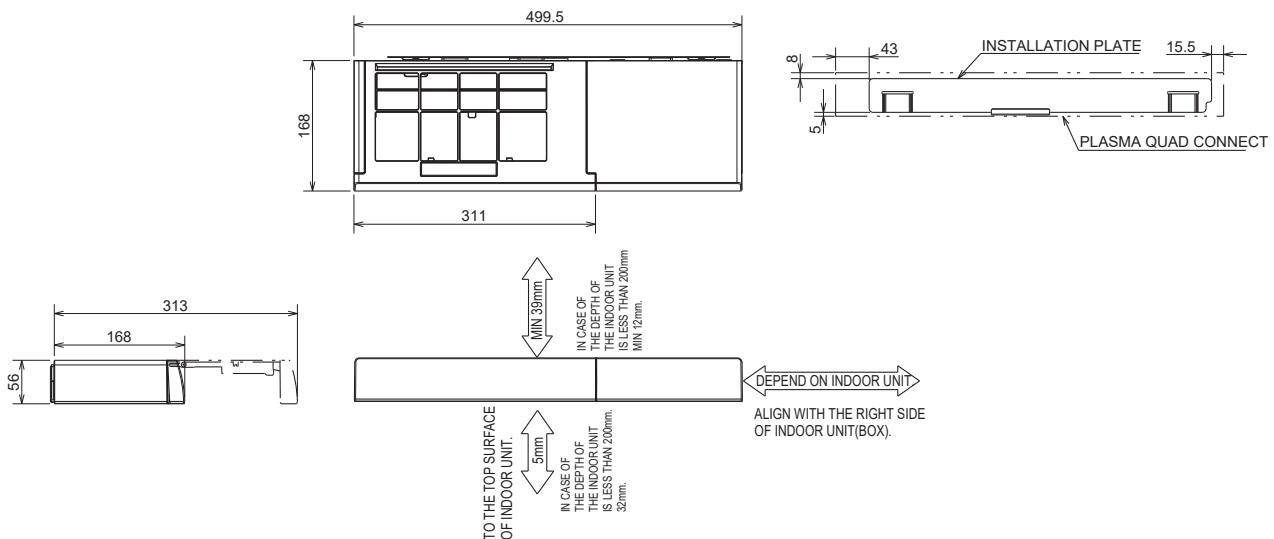

OPTIONAL PARTS

INDOOR UNIT