




haubold®

PN6040



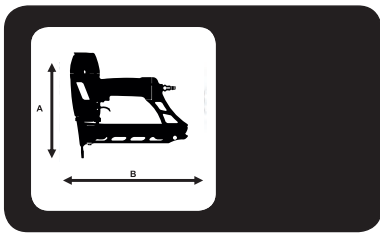

PN6040

		A = 265 mm B = 294 mm C = 64 mm
		= 1,24 kg




	Min. 5,5 bar Max. 8,0 bar
0,7 l (6 bar) /	
Ps max. = 8,0 bar	

	L_{wA.1s} = 93,5 dBA L_{pA.1s} = 93,8 dBA L_{pA.1s.1m} = 80,5 dBA
	<small>EN 12549+EN ISO 4871</small> <small>EN12096 : 1997</small>
	Vibration = 1,8 m/s ²
<small>ISO 8662-11</small>	


155 x KL6000
haubold staple


	KL6000 B = 5,7 mm L = 15 - 40 mm d = 1,0 x 1,25 mm
--	---



	<p>Sequential trigger actuation/ Einzelauslösung/ enkelschots/ Déclenchement du tir - mode séquentiel/ Funcionamiento secuencial "en continuo"/ Gatilho de actuação sequencial/ funcionamiento secuencial (colpo a colpo)/ Enkeltskudds aftrækker/ Enkelskott/ Enkeltskudds avtrekker/ Kertalaukaisu/ Üksiklasu meetodil töötamine/ Uruchomienie spustu sekwencyjne/ Sekvenční spoušť/ Egyes lövés (szakaszosan működtetett elsütő billentyűvel)/ Posamezno proženje/ Kontaktirajte singl / Последовательная активация при нажатии на курок/ Sekvenčná aktivácia spúšte/ التشغيل بالزر التسلسلي المقيد / Nuoseklusis paleidimo mechanizmas/ Sekvenciālās palaišanas iedarbināšana Raðkveikjuvirkjun</p>
 	<p>Contact trigger actuation/ Kontaktauslösung/ repeterend schieten/ Déclenchement du tir - mode rafale/ Funcionamiento por contacto "clavo a clavo"/ Gatilho de actuação por contacto/ funcionamiento a contatto/ Stødskydnings aftrækker/ Støtskjutning/ Støtspikrings avtrekker/ Kosketuslaukaisu/ Automaatmeetodil töötamine/ Uruchomienie spustu przez kontakt/ Kontaktní spoušť/ Sorozatlövés (folyamatosan behúzott elsütő billentyűvel)/ Kontaktno proženje/ Kontaktirajte pokretanje/ Контактная активация при нажатии на курок/ Kontaktná aktivácia spúšte/ التشغيل بتلامس الزر / Kontaktinis paleidimo mechanizmas/ Kontakta palaišanas iedarbināšana/ Snertikveikjuvirkjun</p>


Model: PN6040 Contact actuation
Euro Code: 575852








PN6040
PNEUMATIC STAPLER
Code: 575852
Trigger actuation: Contact
ITW Befestigungssysteme GmbH, Carl-Zeiss-Str. 19 - 30966 Hemmingen, Germany

STAPLE SPECIFICATION
haubold KL6000
















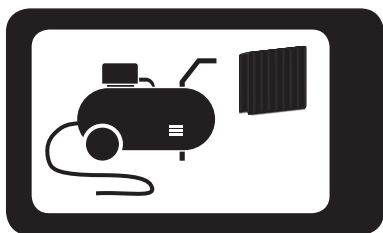
No. 617559

			 <p>2x</p>	 <p>OIL</p>
<p>No. 014748 + No. 575857</p>	<p>No. 014121</p>			






Accessories





No. 151299 / No. 576216
0,5 l oil / 1 l oil
















014 748




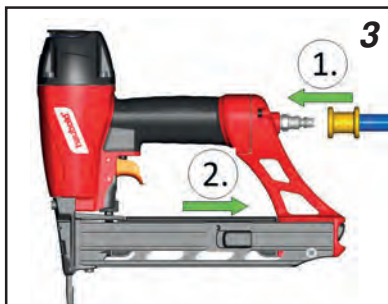




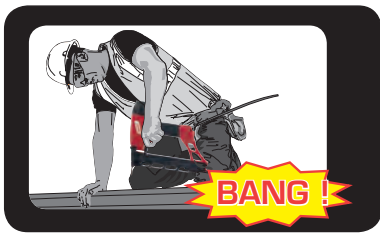

014 748

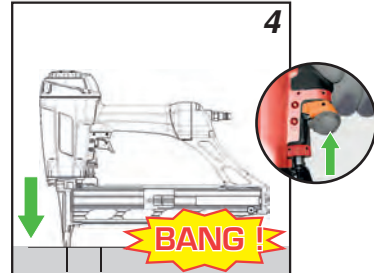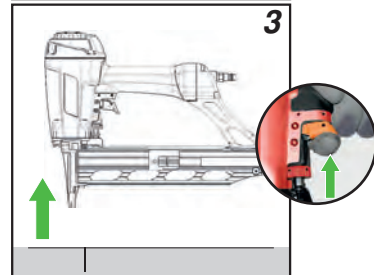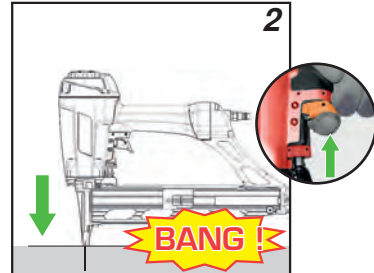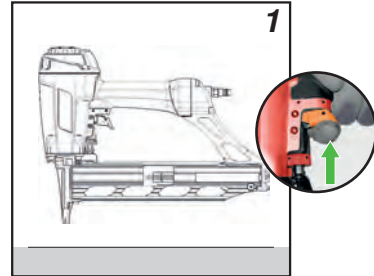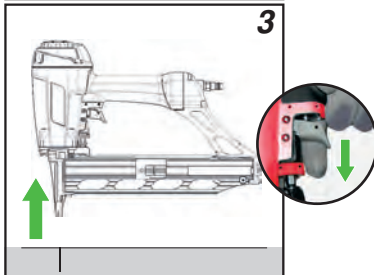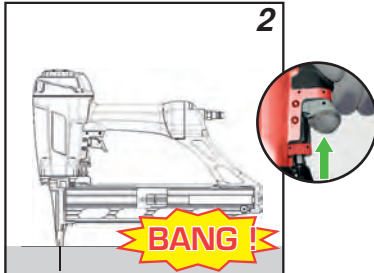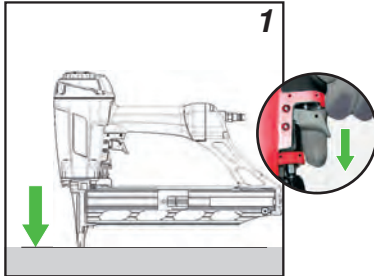

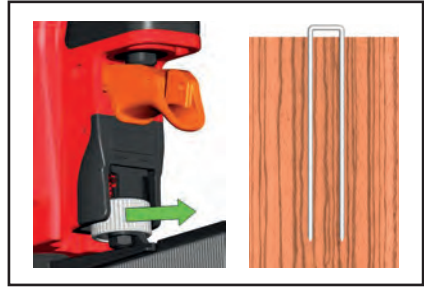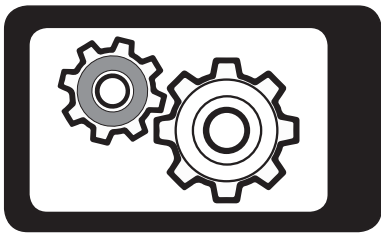



YY/WW....



YY= Year of manufacture
WW = Week of manufacture

**Resting position/ Ruheposition/ Position de repos/ Ruststand/
Posición de descanso/ Posizione di riposo/ Posição de des-
canso/ Pozycja spoczynku/ Klidová poloha/ Nyugalmi állapot/
Положение в нерабочем состоянии/ Θέση αδράνειας/ Hviles-
tilling/ Viloläge/ Hvileposisjon/ Lepoasento/ Položaj mirovanja/
Pokoiová poloha/ Položaj mirovanja/ وضع السكون / Ramybès
padėtis/ Ooteasend/ Miera stāvoklis/ Hvíldarstaða**





ITW CONSTRUCTION PRODUCTS EUROPE
Code 575857 (05/2019)
www.spitpaslode.com