

# SFS60S-HRZT0S01

SFS/SFM60

MOTOR FEEDBACK SYSTEMS ROTARY HIPERFACE®

**SICK**  
Sensor Intelligence.



Illustration may differ



### Ordering information

| Type            | Part no. |
|-----------------|----------|
| SFS60S-HRZT0S01 | 1098876  |

Other models and accessories → [www.sick.com/SFS\\_SFM60](http://www.sick.com/SFS_SFM60)

### Detailed technical data

#### Features

|                                  |                                                               |
|----------------------------------|---------------------------------------------------------------|
| <b>Special device</b>            | ✓                                                             |
| <b>Specialty</b>                 | Cable, 8-wire, 0.6 m with M23 male connector at the cable end |
| <b>Standard reference device</b> | SFS60S-HRKT0K02, 1081504                                      |

#### Safety-related parameters

|                                                                   |                                                    |
|-------------------------------------------------------------------|----------------------------------------------------|
| <b>Safety integrity level</b>                                     | SIL 2 (IEC 61508), SILCL2 (EN 62061) <sup>1)</sup> |
| <b>Category</b>                                                   | 3 (EN ISO 13849)                                   |
| <b>Test rate</b>                                                  | Not required                                       |
| <b>Maximum demand rate</b>                                        | Continuous (analog signals)                        |
| <b>Performance level</b>                                          | PL d (EN ISO 13849) <sup>2)</sup>                  |
| <b>PFH<sub>D</sub>: Probability of dangerous failure per hour</b> | 1.7 x 10 <sup>-8</sup> <sup>2)</sup>               |
| <b>T<sub>M</sub> (mission time)</b>                               | 20 years (EN ISO 13849)                            |
| <b>Safety-related accuracy</b>                                    | ± 0.09°, For square counting <sup>3)</sup>         |
| <b>Safety-related measuring step</b>                              | 0.09°, For square counting                         |

<sup>1)</sup> For more detailed information on the exact configuration of your machine/unit, please consult your relevant SICK branch office.

<sup>2)</sup> The enclosure rating (in accordance with IEC 60529) is achieved with attached mating connector and was tested with the shaft in a horizontal position.

<sup>3)</sup> The values displayed apply to a diagnostic degree of coverage of 90%, which must be achieved by the external drive system. In the event of resonance, suitable tests have to be carried out on the entire drive system.

#### Performance

|                                                         |                                                                                                               |
|---------------------------------------------------------|---------------------------------------------------------------------------------------------------------------|
| <b>Sine/cosine periods per revolution</b>               | 1,024                                                                                                         |
| <b>Number of the absolute ascertainable revolutions</b> | 1                                                                                                             |
| <b>Total number of steps</b>                            | 32,768                                                                                                        |
| <b>Measuring step</b>                                   | 0.3° For interpolation of the sine/cosine signals with, e. g., 12 bits                                        |
| <b>Integral non-linearity</b>                           | Typ. ± 45", Error limits for evaluating sine/cosine period, without mechanical tension of the stator coupling |
| <b>Differential non-linearity</b>                       | ± 7", Non-linearity within a sine/cosine period                                                               |
| <b>Operating speed</b>                                  | ≤ 6,000 min <sup>-1</sup> , up to which the absolute position can be reliably produced                        |

|                              |            |
|------------------------------|------------|
| <b>Available memory area</b> | 1,792 Byte |
| <b>System accuracy</b>       | ± 52 "     |

## Interfaces

|                                            |                                                                                          |
|--------------------------------------------|------------------------------------------------------------------------------------------|
| <b>Type of code for the absolute value</b> | Binary                                                                                   |
| <b>Code sequence</b>                       | Rising, For clockwise shaft rotation, looking in direction "A" (see dimensional drawing) |
| <b>Communication interface</b>             | HIPERFACE®                                                                               |

## Electrical data

|                                                 |                                                           |
|-------------------------------------------------|-----------------------------------------------------------|
| <b>Connection type</b>                          | Cable, 8-wire, 0.6 m, M23 male connector at the cable end |
| <b>Supply voltage</b>                           | 7 V DC ... 12 V DC                                        |
| <b>Recommended supply voltage</b>               | 8 V DC                                                    |
| <b>Current consumption</b>                      | < 80 mA (without load)                                    |
| <b>Output frequency for sine/cosine signals</b> | ≤ 200 kHz                                                 |

## Mechanical data

|                                       |                                         |
|---------------------------------------|-----------------------------------------|
| <b>Shaft version</b>                  | Through hollow shaft                    |
| <b>Shaft diameter</b>                 | 14 mm                                   |
| <b>Shaft material</b>                 | Stainless steel                         |
| <b>Flange material</b>                | Zinc diecast                            |
| <b>Housing material</b>               | Aluminum die cast                       |
| <b>Flange type / stator coupling</b>  | Stator coupling                         |
| <b>Dimensions</b>                     | See dimensional drawing                 |
| <b>Weight</b>                         | ≤ 0.25 kg                               |
| <b>Moment of inertia of the rotor</b> | 56 gcm <sup>2</sup>                     |
| <b>Operating speed</b>                | ≤ 6,000 min <sup>-1</sup> <sup>1)</sup> |
| <b>Angular acceleration</b>           | ≤ 500,000 rad/s <sup>2</sup>            |
| <b>Operating torque</b>               | 0.6 Ncm (+20 °C)                        |
| <b>Start up torque</b>                | + 0.8 Ncm (+20 °C)                      |
| <b>Permissible movement static</b>    | ± 0.3 mm, ± 0.5 mm radial, axial        |
| <b>Permissible movement dynamic</b>   | ± 0.1 mm radial<br>± 0.1 mm axial       |
| <b>Life of ball bearings</b>          | 3.6 x 10 <sup>9</sup> revolutions       |

<sup>1)</sup> Allow for self-heating of 3.3 K per 1,000 rpm when designing the operating temperature range.

## Ambient data

|                                                    |                                                          |
|----------------------------------------------------|----------------------------------------------------------|
| <b>Operating temperature range</b>                 | -30 °C ... +85 °C                                        |
| <b>Storage temperature range</b>                   | -40 °C ... +90 °C, without package                       |
| <b>Relative humidity/condensation</b>              | 90 %, Condensation not permitted                         |
| <b>Resistance to shocks</b>                        | 100 g, 6 ms (according to EN 60068-2-27)                 |
| <b>Frequency range of resistance to vibrations</b> | 20 g, 10 Hz ... 2,000 Hz (EN 60068-2-6)                  |
| <b>EMC</b>                                         | According to EN 61000-6-2 and EN 61000-6-3 <sup>1)</sup> |

<sup>1)</sup> The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. The GND-(0 V) connection of the supply voltage is also grounded here. If other shielding concepts are used, users must perform their own tests.


|                         |                                                  |
|-------------------------|--------------------------------------------------|
| <b>Enclosure rating</b> | IP65, with mating connector inserted (IEC 60529) |
|-------------------------|--------------------------------------------------|

1) The EMC according to the standards quoted is achieved when the motor feedback system is mounted in an electrically conductive housing, which is connected to the central earthing point of the motor controller via a cable screen. The GND-(0 V) connection of the supply voltage is also grounded here. If other shielding concepts are used, users must perform their own tests.

### Classifications


|                       |          |
|-----------------------|----------|
| <b>eCl@ss 5.0</b>     | 27270590 |
| <b>eCl@ss 5.1.4</b>   | 27270590 |
| <b>eCl@ss 6.0</b>     | 27270590 |
| <b>eCl@ss 6.2</b>     | 27270590 |
| <b>eCl@ss 7.0</b>     | 27270590 |
| <b>eCl@ss 8.0</b>     | 27270590 |
| <b>eCl@ss 8.1</b>     | 27270590 |
| <b>eCl@ss 9.0</b>     | 27270590 |
| <b>eCl@ss 10.0</b>    | 27273805 |
| <b>eCl@ss 11.0</b>    | 27273901 |
| <b>eCl@ss 12.0</b>    | 27273901 |
| <b>ETIM 5.0</b>       | EC001486 |
| <b>ETIM 6.0</b>       | EC001486 |
| <b>ETIM 7.0</b>       | EC001486 |
| <b>ETIM 8.0</b>       | EC001486 |
| <b>UNSPSC 16.0901</b> | 41112113 |

### Dimensional drawing (Dimensions in mm (inch))

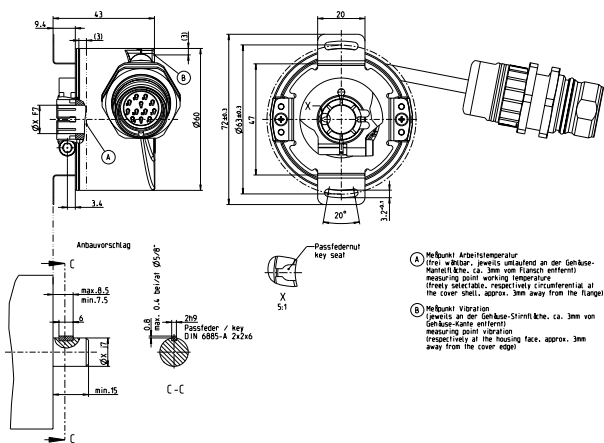

## Diagrams


Signal specification of the process channel

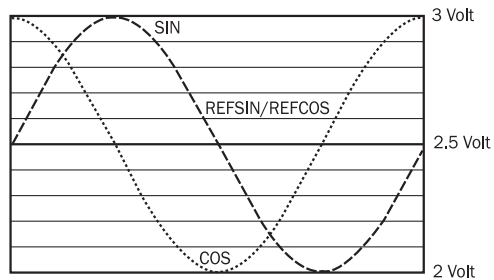

Signal diagram for clockwise rotation of the shaft looking in direction "A" (see dimensional drawing) 1 period = 360 ° : 1024

## Recommended accessories

Other models and accessories → [www.sick.com/SFS\\_SFM60](http://www.sick.com/SFS_SFM60)

|                                                                                   | Brief description                                         | Type         | Part no. |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------|--------------|----------|
| Programming and configuration tools                                               |                                                           |              |          |
|  | SVip@ LAN programming tool for all motor feedback systems | PGT-11-S LAN | 1057324  |

## SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

## WORLDWIDE PRESENCE:

Contacts and other locations –[www.sick.com](http://www.sick.com)