



Current  
transformers  
DM4T1500  
Solid-core

Product designation

Product type designation

Type of CT

**Current inputs**

Primary current $I_{pn}$ (/5)	A	1500
Operational frequency	min max	Hz Hz 50 60
Secondary output current	A	5
Overload withstand $I_{pn}$	%	120
Burden	cl. 0.5 cl. 1	VA VA 20 30

**Insulations**

Rated insulation voltage $U_i$ IEC/EN	V	720
IEC rated short-time thermal current $I_{th}$	$I_{th}$ for s	40...60
IEC rated dynamic current $I_{dyn}$	$I_{th}$ for s	2.5
Insulation dry type		Class E


**Mechanical features**

Terminals type		Screw
Fixing		DIN rail or by Screw
Weight	g	760

**Ambient conditions**

Temperature	Operating temperature	min max	°C °C	-25 +50
	Storage temperature	min max	°C °C	-40 +80
Relative humidity			%	90
Protection degree				IP30

**Dimensions**

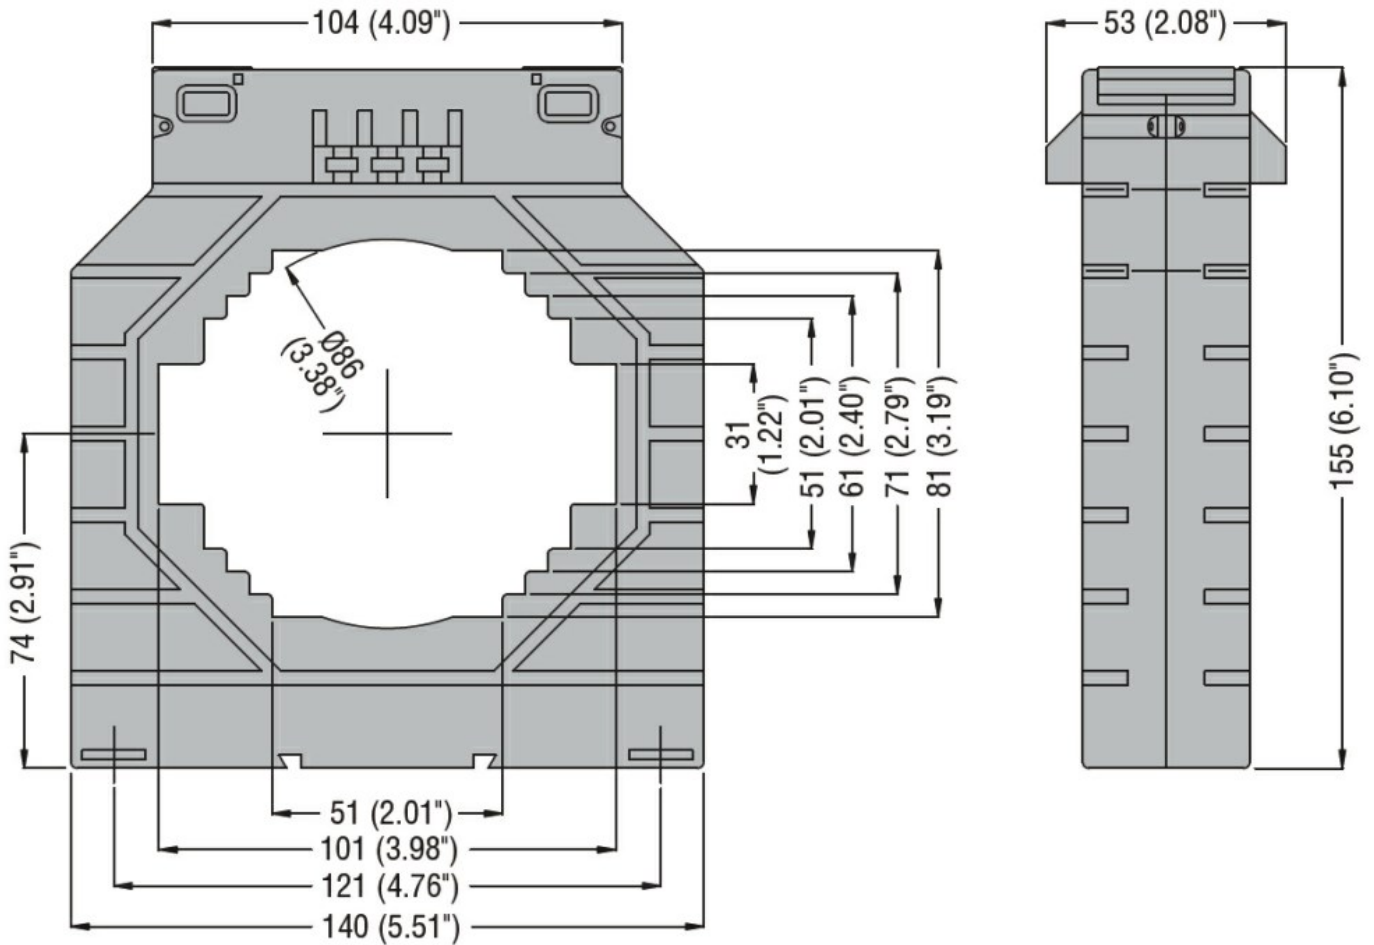

**Certifications and compliance**

Certifications

IEC/EN/BS 61869-1

IEC/EN/BS 61869-2

Compliance

EAC

**ETIM classification**

EC000066 - Power contactor, AC switching