



# WALL ENCASTRE




The installation must be carried out by a qualified electrician  
*L'installation doit être effectuée par un professionnel qualifié*

## Caractéristiques techniques / Características técnicas / Características técnicas / Caratteristiche tecniche

Modèle-Référence / Modelo-Referencia / Modello-Riferimento / Modelo-Referência	PL16046501	PL16046502	PL16046503
Tension nominale / Tensión nominal / Tensione nominale / Tensão nominal		230V~50Hz	
Puissance nominale / Potencia nominal / Potenza nominale / Potência nominal		4W	8W (7 ERP)
Type-Longueur de câble / Tipo-Longitud del cable / Tipo-Lunghezza del cavo / Tipo-Comprimento do cabo	Bornier avec repiquage / fast connectors inside the product		
Indice de protection / Grado de protección / Indice di protezione / Grau de protecção	IP 65		
Dimensions / Dimensiones / Dimensioni / Dimensões	diam: 115mm hauteur: 37mm	115*115*37mm	226*76*54mm
Lampes LED / Lámparas LED / Lampade LED / Lâmpadas LED	SMD		
Nombre de LEDs / Número de LEDs / Numero di LEDs / Número de LEDs	-		
Flux lumineux nominal / Flujo luminoso nominal / Flusso luminoso nominale / Fluxo luminoso nominal	220Lm (ERP 435)		330Lm (ERP 435)
Durée de vie nominale / Vida útil nominal / Durata di vita nominale / Tempo de vida nominal	≥ 35000 h (L80 @ 25°C) *		
Détecteur / Sensor			
Température de couleur / Temperatura de color / Temperatura di colore / Temperatura de cor	3000K		
Indice de rendu des couleurs / Índice de rendimento de color / Índice de resa del colore / Índice de restituição das cores	≥ 80 Ra		
Angle de faisceau nominal / Angulo del haz luminoso nominal / Angulo del fascio nominale / Angulo nominal do feixe	60°		
Facteur de puissance / Factor de potencia / Fattore di potenza / Fator de potência	> 0.9		



## ENCASTRE / RECESSED

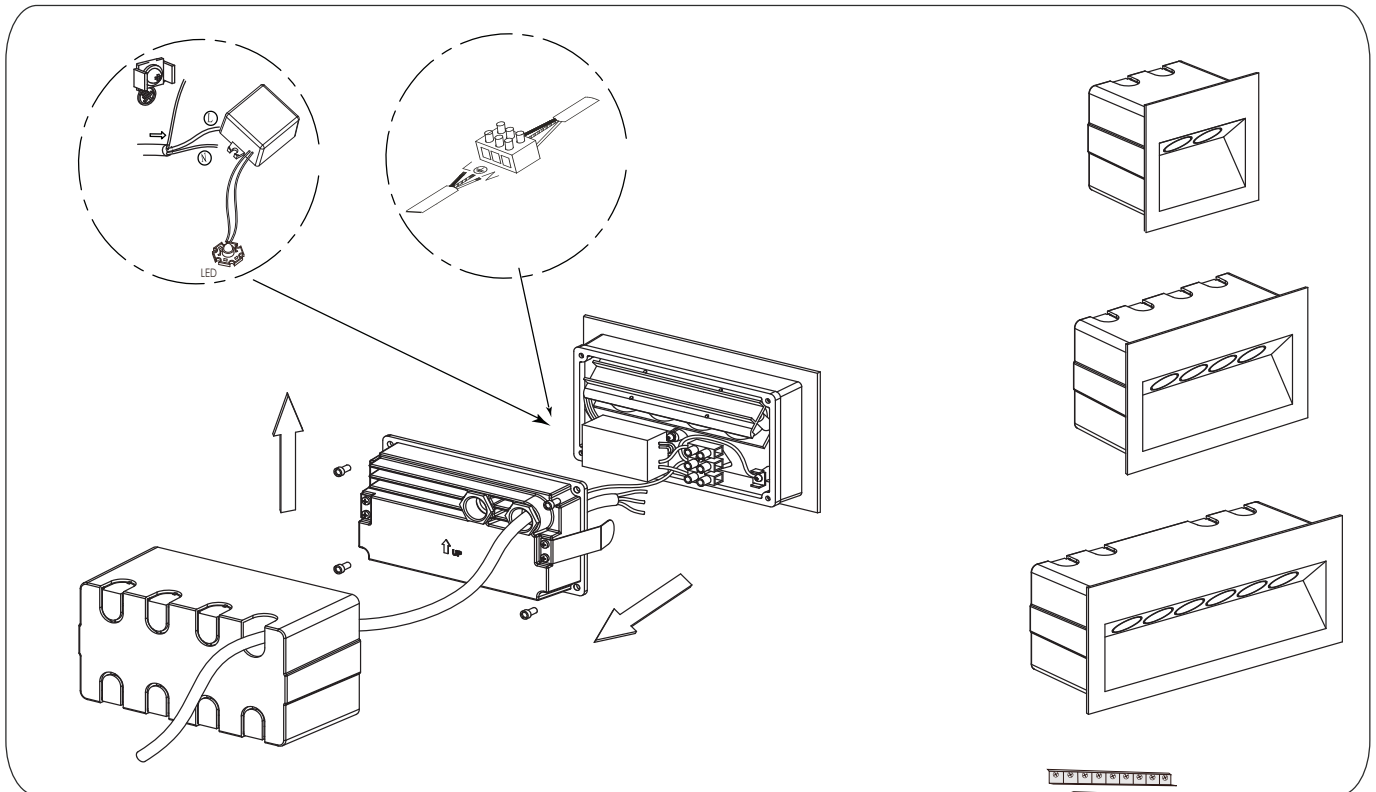

ERP / EPREL

PL16046501/2

PL16046503



05-2023