



Product designation				Enclosed switch disconnecter
Product type designation				GAZS
Number of poles	Nr.			3
Operating voltage type				AC
Contact characteristics				
IEC Conventional free air thermal current I _{th}	A			25
Rated insulation voltage U _i IEC/EN	V			1000
Rated impulse withstand voltage U _{imp}	kV			8
Operating current I _e				
AC21A				
	400V	A	25	
	500V	A	25	
	690V	A	25	
AC22A				
	400V	A	25	
	500V	A	25	
	690V	A	25	
AC23A				
	400V	A	25	
	500V	A	25	
	690V	A	25	
Power dissipation per pole max		W	0.4	
Rated operational power AC23A				
	400V	kW	11	
	690V	kW	22	
Conditional short-circuit current (rms)		kA	10	
Short-circuit protection with fuse		Class/A	gG25	
Making capacity AC23A 400V		A	400	
Breaking capacity AC23A 400V		A	320	
Mechanical life		cycles	100000	
Electrical life AC21A		cycles	100000	
Mechanical features				
Operating position		normal allowable	Vertical plan Any	
Terminals		type	Pillar	
		width	mm	5.6
		height	mm	6.5
		screw	M4	
		tool	Phillips 2	
Tightening torque for terminals		min	Nm	1.8
		max	Nm	2

	min	lbin	16
	max	lbin	18

Conductor section

IEC min	mm ²	0.75
IEC max	mm ²	16
AWG/kcmil min		18
AWG/kcmil max		6

Ambient conditions

Operating temperature

min	°C	-25
max	°C	+55

Storage temperature

min	°C	-40
max	°C	+70

Max altitude

m	3000
---	------

Resistance & Protection

Frontal IP degree

IP65


IP degree of protection

IP65

Pollution degree


3

Dimensions

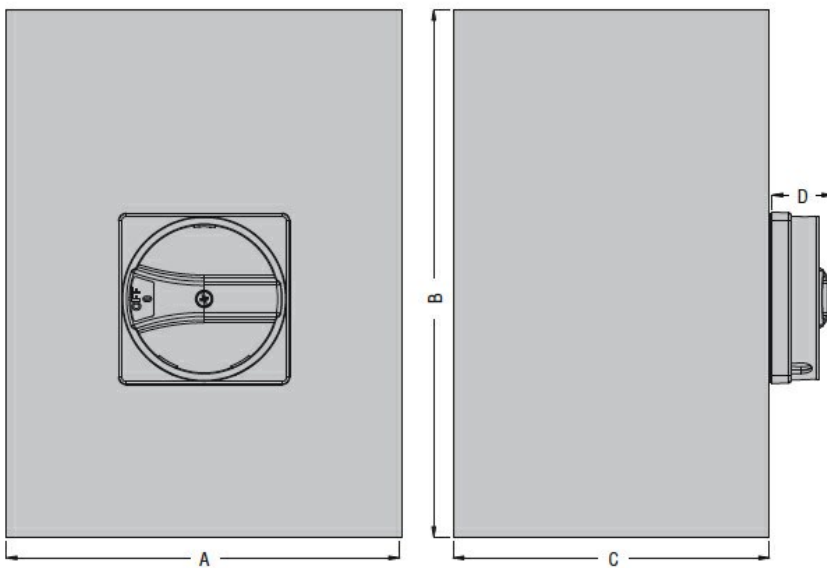

Type	A	B	C	D
GAZS016...GAZS100...	150 (5.90")	200 (7.87")	120 (4.72")	23 (0.90")

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-3

ETIM classification

ETIM 8.0

EC000216 -
Switch
disconnecter