


Product Description:

L'encastré LED Spryte™ est le produit de remplacement idéal des produits halogènes et des encastrés avec réflecteurs R63 et R80. Equipé d'une lentille en polycarbonate multi-facettes EnFiniti™60°, cet encastré LED très compact offre un flux important, un faible éblouissement et l'apparence de l'halogène. Désormais aussi disponible en 8W orientable et 10W fixe pour couvrir plus d'applications. Compatible réglementation RT 2012.


Product Image:



Line Drawing

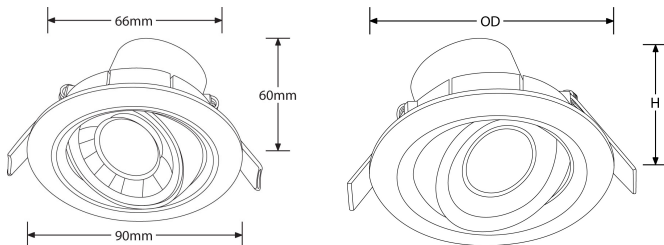

Polar Curve

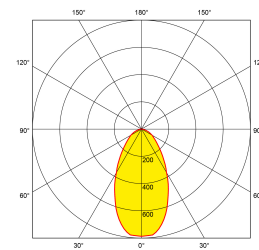

Product Specs:

Technology	LED	Input Voltage	220-240V AC
Lamp Base	Aucun	Positional Adjustment	Orientable
Number of LEDs	24	Luminaire Distribution	Accentuation
Lifetime L70 (hrs)	25.000	Input Frequency	/50HZ
Dimmable	Oui	IP Rating	IP44
IK Rating	IK07	Operating Env. Temp. (Min) °C	-20°C
Operating Env. Temp. (Max) °C	40°C	Power Factor	0.5
Overall Diameter (mm)	90	Height (mm)	55
Recess Depth (mm)	80	Cutout Diameter (mm)	70
Weight (Kg)	0.167		

SKU Table and Ordering:

SKU Code	Wattage	Beam Angle	Lumens	Lumens/Watt	CRI	Colour	Finish Colour
EN-DDL10260/30	8	60	620	78	80	3000	Blanc mat
EN-DDL10260/40	8	60	680	85	80	4000	Blanc mat

Compliance & Approvals:



Warranty:

This product has a guarantee period of . Warranties may be available on certain products as indicated in the product description. Warranties are valid from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering, removal of the Q.C. date label or installation in an improper working environment or installation. Should this product fail during the warranty period it will be replaced free of charge, subject to the correct installation of the original product and subsequent return of the faulty unit. Aurora does not accept responsibility for any installation costs associated with the replacement of this product and Aurora reserves the right to alter specifications without prior notice.

UK Head Office
Apex Park
6 Little Burrow
Welwyn Garden City AL7 4SW
United Kingdom
Tel : +44 (0) 1727 83 66 11