

2






1

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

NOTES:

1. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR INSTALLATION INSTRUCTIONS SPECIFIC TO THIS PRODUCT (FS206). TO BE USED WITH FLEXCORE OPTICAL DISTRIBUTION FRAME.
2. DIMENSIONS IN [] ARE METRIC.
3. ALL MATERIALS AND COMPONENTS USED MEET THE MATERIAL RESTRICTIONS OF RoHS (EUROPEAN DIRECTIVE 2011/65/EU ON THE RESTRICTION OF HAZARDOUS SUBSTANCES) AS PROPOSED BY THE RoHS TECHNICAL ADAPTATION COMMITTEE.
4. FDFMX5KITBL ACCEPTS CABLES WITH OUTER DIAMETER UP TO 1.34" (34mm).
5. FDFMX5KITBL CAN BREAKOUT CABLES UP TO 864 FIBERS.
6. NO CABLE TIES ARE INCLUDED WITH FDFMX5KITBL, SUGGESTED TO WORK WITH PANDUIT CABLE TIE PART #: PLT2S-MO.
7. FDFMX5KITBL COMES WITH (12) TUBES, EACH 2' (61cm) LONG.
8. MORE SETS OF TUBES ARE AVAILABLE FOR PURCHASE:
 - A. FM5PPBLF2.0 - EXTRA (12) 2' CUT LENGTHS OF TUBING
 - B. FM5PPBLF4.0 - EXTRA (12) 4' CUT LENGTHS OF TUBING
 - C. FM5PPBLF8.0 - EXTRA (12) 8' CUT LENGTHS OF TUBING

FDFMX5KITBL

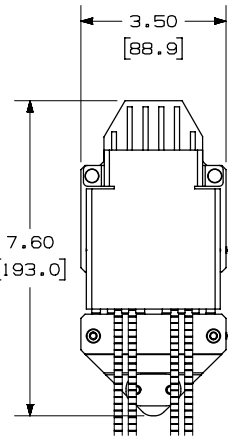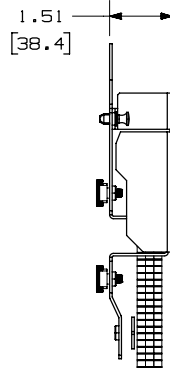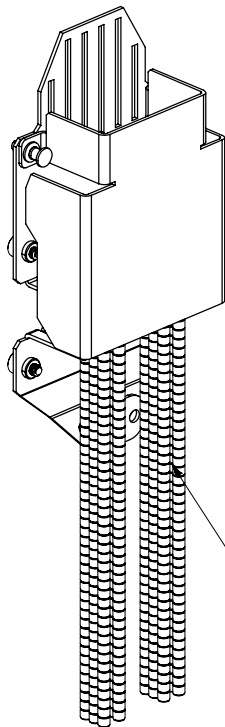

TUBES NOT SHOWN TO SCALE

FM5PPBLF***

TOTAL LENGTH OF TUBING	
= 2.0 +0.25/-0.0 FT.	FOR FM5PPBLF2.0-12
= 4.0 +0.25/-0.0 FT.	FOR FM5PPBLF4.0-12
= 8.0 +0.25/-0.0 FT.	FOR FM5PPBLF8.0-12

PART NUMBER		FDFMX5KITBL, FM5PPBLF***-12	
TITLE			
ODF/OSF 5.0mm Miniflex Breakout Kit - Can hold up to (36) tubes, includes (12) tubes, each 2 ft. long, black			
CUSTOMER DRAWING			
ITEM REVISION NAME		00975EAM/02	
DATASET FILE NAME		00975EAM_DC/02A	
MATERIAL		THIRD ANGLE PROJECTION	
DRAWING NUMBER		00975EAM-DC	
DRAWN BY		DATE	
SAT		12/10/2021	
CHK		SCALE	
BJBE		NONE	
SHEET 1 OF 1		SIZE	
B		B	

02A	12/10/2021	SAT	BJBE	GB-SJMO	INITIAL RELEASE	00975EAM-DC
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN

2



1

B-SIZE CUSTOMER