

Technical specifications


Alkaline

Everyday Power



LR6

Panasonic Typical Dimensions

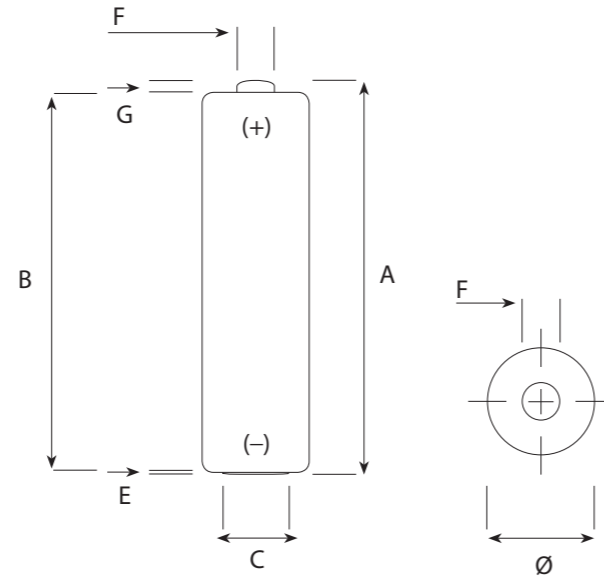

IEC Dimensions (mm)		
Dimension	Maximum	Minimum
A	50,5	
B		49,2
C		7,0
E	0,5	
F	5,5	
G		1,0
Ø	14,5	13,5


Specifications

Name	LR6 / M / AA / AM3 / MIGNON / MN1500 / 15A / 15AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	22,8 g
Storage temperature range	+10°C ~ +25°C
Operating temperature range	-20°C ~ +45°C
Average Impedance	+/- 105 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EU directive 2006/66/EC
Recommended cut off voltage	0,8V per cell


Typical discharge values

LR6


Radio 4h/d 43 ohm end 0,9 volt

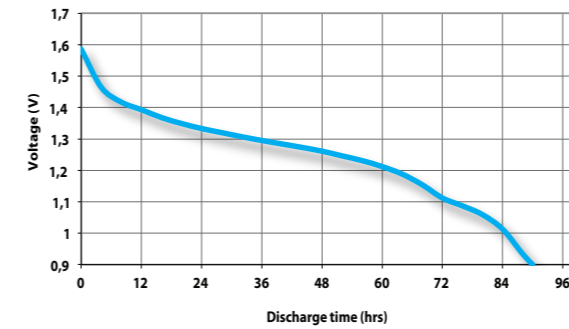


Tape 1h/d 100 mA end 0,9 volt

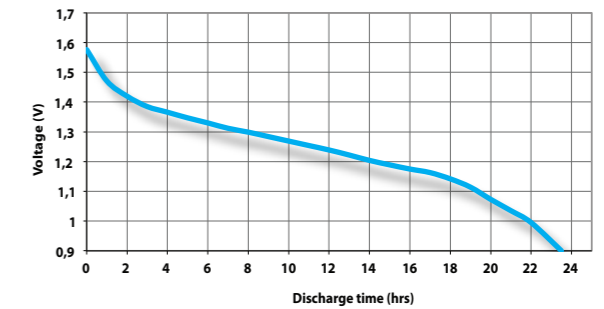


Motor 1h/d 3,9 ohm end 0,8 volt

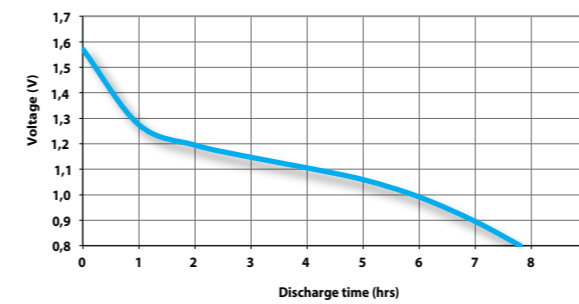


Remote Control 15s/m 8h/d 24 ohm end 1,0 volt

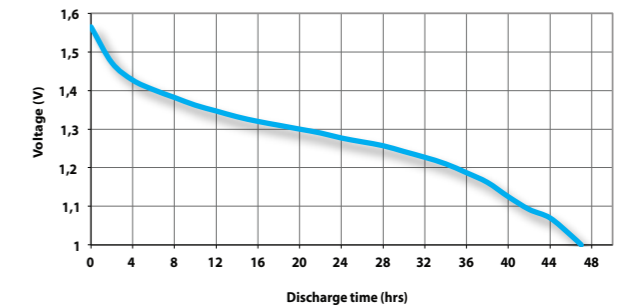


Fotoflash 10s/m 1h/d 1000 mA end 0,9 volt

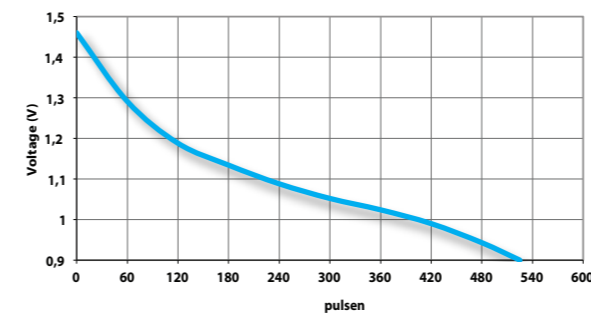


CDMD 1h/d 250 mA end 0,9 volt

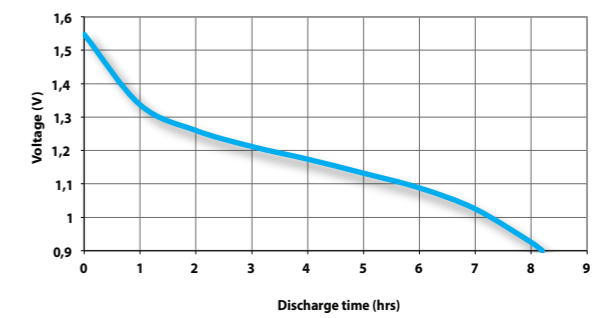

DSC 10x(2s 1,5W/28s 0,65W) 5m,55m off, 24h/d end 1,05 volt

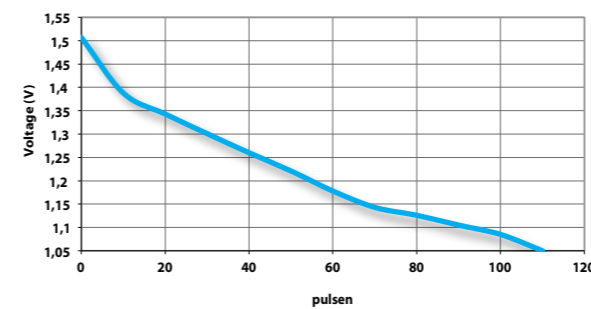

LIF 4m/h 8h/d 3,3 ohm end 0,9 volt

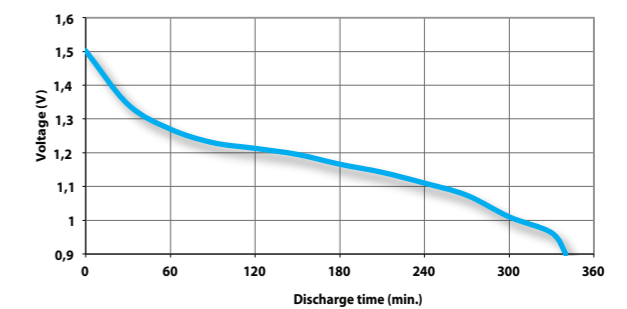

Copyright© Panasonic Energy Europe N.V. ("PECE") 2012 - All rights reserved. The information contained herein is believed to be correct. However no warranty is made, either expressed or implied regarding the accuracy or the results to be obtained from the use of such information. Test results are according to IEC conditions. Capacities of batteries are depending on drain, temperature and cut-off voltage. Data are subject to change without prior notification.08/2012

Promoter: Panasonic Energy Europe N.V., P. Celis, Brusselsesteenweg 502, 1731 Zellik, Belgium

For more information: www.panasonic-batteries.com