


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT P/N	WEIGHT
P48E10M-XYZ	SEE SHEET 2

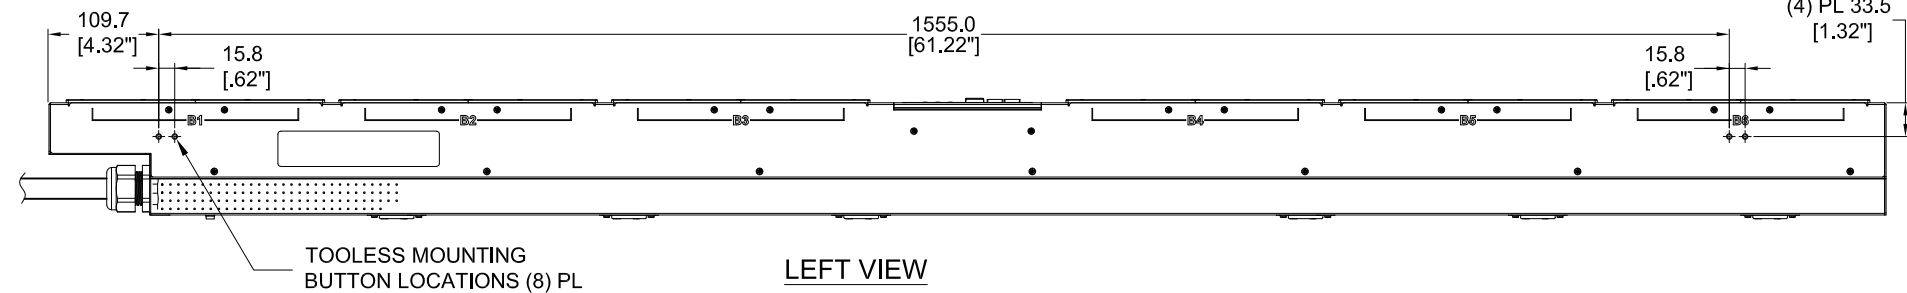

SPECIFICATION:

1. STANDARD:
 UNIT TYPE: MONITORED SWITCHED
 ORIENTATION: VERTICAL, 0U FULL, 2-SIDE
 OUTLET QTY & TYPE: (36)C13, (12)C19
 INPUT VOLTAGE: 200-240/346-415VAC
 INPUT CURRENT: 32A
 BREAKER QTY & TYPE: (6) 16AMP, SINGLE-POLE
 INPUT PHASE: THREE-PHASE, WYE
 RATED POWER: 22.0kVA
 INPUT PLUG: IEC 60309 3P+N+E 6H 32A
 INPUT POWER CORD: SEE SHEET 2 FOR PART NUMBER TABLE
 REGULATORY STANDARD: RoHS COMPLIANT





2. ADDITIONAL:
 NONE

3. ACCESSORIES:
 (1) QUICK-START GUIDE

NOTES:

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN [INCHES] .
 2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES .
 3. VISIT OUR ON-LINE CATALOG AT WWW.PANDUIT.COM FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART .
 4. FOR FULL PRODUCT FUNCTIONALITY REFER TO USER MANUAL .
 5. DRAWING VIEWS SHOW THE INPUT CORD IN THE "TOP END FED" CONFIGURATION

IDENTIFICATION
 FOR FINISHED GOOD PART NUMBER & DESCRIPTION TABLE SEE SHEET 2 CONFIGURABLE PART NUMBERS: **P48E10M-XX Y Z**

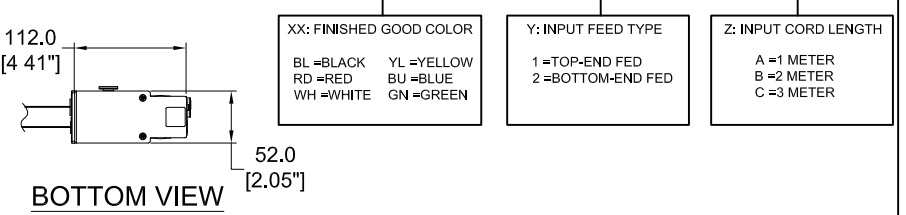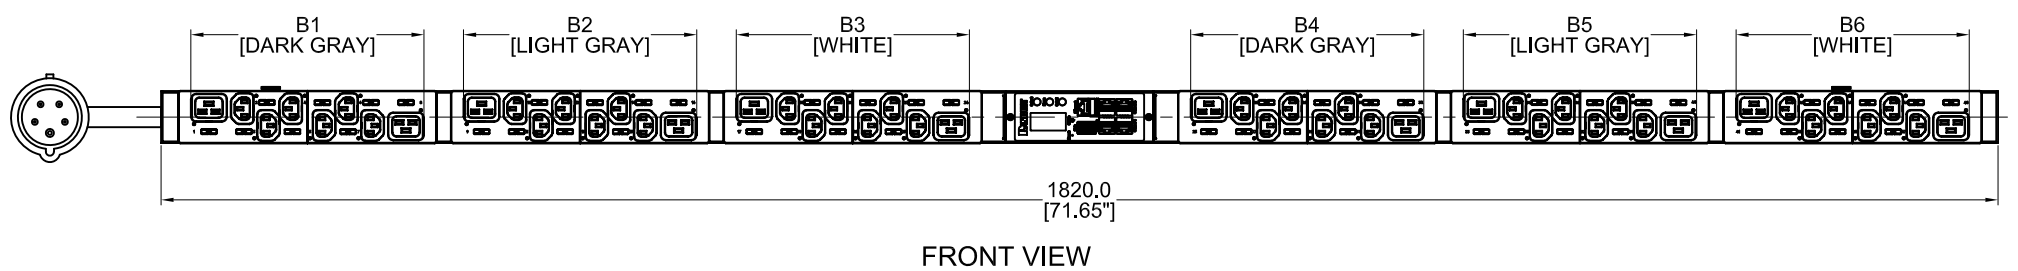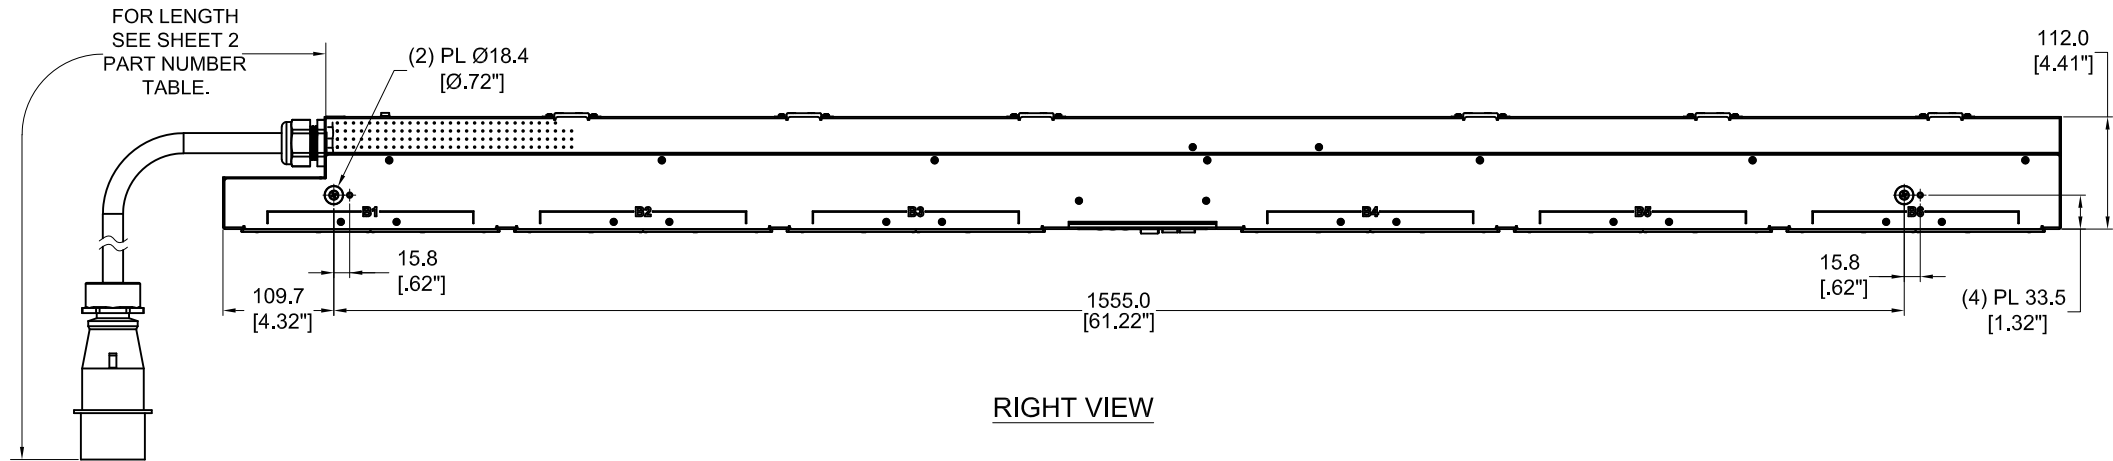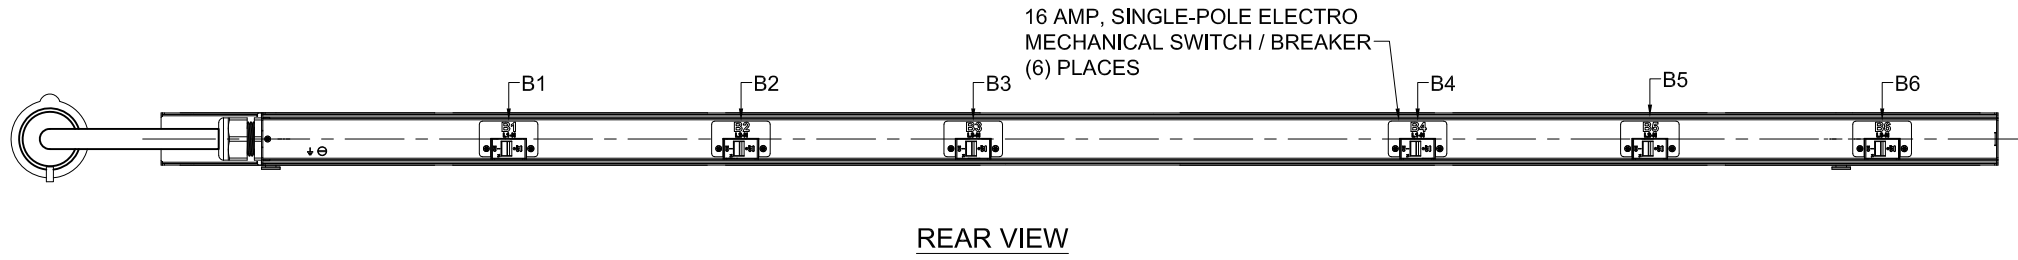

XX: FINISHED GOOD COLOR BL =BLACK YL =YELLOW RD =RED BU =BLUE WH =WHITE GN =GREEN	Y: INPUT FEED TYPE 1 =TOP-END FED 2 =BOTTOM-END FED	Z: INPUT CORD LENGTH A =1 METER B =2 METER C =3 METER
--	---	--

PLUG/RECEPTACLE BLOCK

PLUG
IEC 60309, 4P 5W, 6H
IP44 (SPASHPROOF)
32A, 346 - 415V MAX RATED INPUT

RECEPTACLES
IEC 60320/C19
16A, 250V MAX RATED OUTPUT

RECEPTACLES
IEC 60320/C13
10A, 250V MAX RATED OUTPUT

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P48E10M
01A	10/18/2017	WSJ	MIM	EDM	INITIAL RELEASE	P48E10M

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
 DATE _____
 PRINT _____

TITLE: INTELLIGENT SERIES PDU
 P48E10M-XYZ
 CUSTOMER DRAWING

ITEM REVISION NAME: _____
 DATASHEET FILE NAME: _____

UNLESS OTHERWISE SPECIFIED
 DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)	
0<L<50	±0.5
50<L<250	±1.0
250<L<500	±1.5
500<L<1000	±2.5
1000<L<2000	±4.0

MATERIAL/COLOR: N/A

DRAWING NUMBER: P48E10M_DC

THIRD ANGLE PROJECTION

DRAWN BY: WSJ DATE: 10/18/2017 CHK: SEAN SCALE: NONE

SHT 1 OF 2 SCALE: B

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

FINISHED GOOD PART NUMBER	FINISHED GOOD DESCRIPTION	COLOR	INPUT CORD LENGTH	WEIGHT
P48E10M	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-BL1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-BL1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-RD1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-RD1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-RD1C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-WH1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-WH1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-WH1C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-YL1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-YL1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-YL1C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-BU1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-BU1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-BU1C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-GN1A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-GN1B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-GN1C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, TOP-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-BL2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, BLACK	BLACK (RAL 9005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-BL2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, BLACK	BLACK (RAL 9005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-BL2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, BLACK	BLACK (RAL 9005)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-RD2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, RED	RED (RAL 3020)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-RD2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, RED	RED (RAL 3020)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-RD2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, RED	RED (RAL 3020)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-WH2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, WHITE	WHITE (RAL 9003)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-WH2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, WHITE	WHITE (RAL 9003)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-WH2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, WHITE	WHITE (RAL 9003)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-YL2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-YL2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-YL2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, YELLOW	YELLOW (RAL 1023)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-BU2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, BLUE	BLUE (RAL 5005)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-BU2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, BLUE	BLUE (RAL 5005)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-BU2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, BLUE	BLUE (RAL 5005)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg
P48E10M-GN2A	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 1 METER INPUT CORD, GREEN	GREEN (RAL 6001)	1M(+178MM-89MM) 3.3'[+7"/-3.5"]	10.3kg
P48E10M-GN2B	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 2 METER INPUT CORD, GREEN	GREEN (RAL 6001)	2M(+178MM-89MM) 6.5'[+7"/-3.5"]	11.0kg
P48E10M-GN2C	VERTICAL,(36) C13,(12) C19,MONITORED SWITCHED,200-240/346-415V/32A/THREE-PHASE WYE, BOTTOM-END FED, 3 METER INPUT CORD, GREEN	GREEN (RAL 6001)	3M(+254MM-127MM) 10'[+10"/-5"]	11.7kg

B

B

A

A

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY

SIGN _____
DATE _____
PRINT _____

TITLE
INTELLIGENT SERIES PDU
P48E10M-XYZ
CUSTOMER DRAWING

ITEM REVISION NAME
DATASHEET FILE NAME:

UNLESS OTHERWISE SPECIFIED
DIMENSIONAL TOLERANCE ARE: mm [IN]

Tolerance(mm)
0<L<50 ±0.5
50<L<250 ±1.0
250<L<500 ±1.5
500<L<1000 ±2.5
1000<L<2000 ±4.0

THIRD ANGLE PROJECTION

MATERIAL/COLOR:
N/A

DRAWING NUMBER:
P48E10M_DC

DRAWN BY: WSJ DATE: 10/18/2017 CHK: SEAN SCALE: NONE

SHT 2 OF 2 SCALE: B

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
02A	06/07/2018	JF.YU	MIM	JAWI	ADDED SHEET 2 WITH CONFIGURABLE PART NUMBER TABLE AND DESCRIPTION UPDATED IDENTIFICATION TO INCLUDE CONFIGURABLE OPTION DE-CODER UPDATED CIRCUIT BREAKER LABELS WITH ROTATED TEXT	P48E10M
01A	10/18/2017	WSJ	MIM	EDM	INITIAL RELEASE	P48E10M