



|                          |                                 |
|--------------------------|---------------------------------|
| Product designation      | Miniature circuit breaker (MCB) |
| Product type designation | P1 MB                           |
| Number of poles          | 4P                              |
| Number of DIN modules    | 4                               |
| Compliance               | IEC / UL1077                    |

| Electrical features                       |        |  |         |
|---|--------|--|---------|
| Rated insulation voltage $U_i$ IEC/EN     | V      |  | 440     |
| Rated impulse withstand voltage $U_{imp}$ | kV     |  | 4       |
| Rated operational voltage AC (IEC)        | VAC    |  | 230/400 |
| Rated frequency                           | Hz     |  | 50/60   |
| Rated current ( $I_n$ )                   | A      |  | 2       |
| Tripping curve                            |        |  | C       |
| Short circuit rating (IEC)                | kA     |  | 10      |
| Electrical life                           | cycles |  | 10000   |
| Power dissipation per pole max            | W      |  | 0.96    |


| Ambient conditions    |     |    |      |
|-----------------------|-----|----|------|
| Operating temperature | min | °C | -40  |
|                       | max | °C | +70  |
| Storage temperature   | min | °C | -40  |
|                       | max | °C | +80  |
| Max altitude          |     | m  | 2000 |

| Mechanical features             |                 |        |                 |       |
|---------------------------------|-----------------|--------|-----------------|-------|
| Operating position              |                 | normal | Vertical plan   |       |
|                                 | Fixing          |        | 35mm DIN rail   |       |
| Tightening torque for terminals | min             | Nm     | 1.8             |       |
|                                 | max             | Nm     | 2               |       |
|                                 | min             | Ibin   | 16              |       |
|                                 | max             | Ibin   | 17.7            |       |
| Terminals tool                  |                 |        | Pz 2            |       |
| Conductor section               | IEC             | min    | mm <sup>2</sup> | 1     |
|                                 |                 | max    | mm <sup>2</sup> | 35    |
|                                 | AWG/Kcmil       | min    |                 | 14    |
|                                 |                 | max    |                 | 6     |
|                                 | Mechanical life |        | cycles          | 20000 |
|                                 | Weight          |        | g               | 460   |
| Frontal IP degree               |                 |        | IP20            |       |
| Pollution degree                |                 |        | 2               |       |


Grid distance as per Annex H.1 of IEC/EN60898-1 standard

mm 60

**Dimensions**

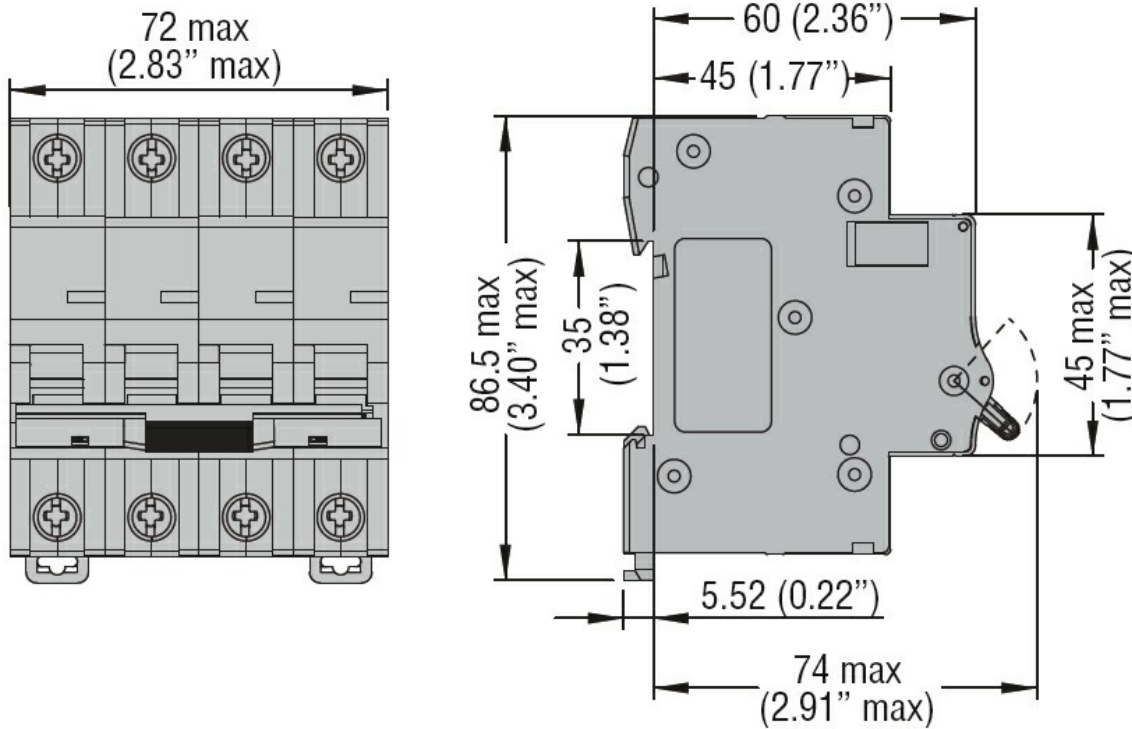

**Wiring diagrams**



**Certifications and compliance**

**Compliance**

CSA C22.2 n°235. UR "UL Recognized" per Canada e USA.

IEC/EN 60898-1

IEC/EN 60947-2

UL 1077

**Certifications**

cURus

EAC

TÜV-Rheinland

**ETIM classification**

ETIM 8.0

EC000042 -  
Miniature circuit  
breaker (MCB)