



Pilot light head  
LPFL

Product designation  
Product type designation

**General characteristics**

Colour	Transparent
Type of positions	Pilot light head
Material	Aluminium and zinc alloy for the metal part, polyamide for plastic parts
IEC degree of protection	IP66, IP67 and IP69K

**Mechanical features**

Fixing	Without mounting adapter
Mounting adapter	LPXAU120M


**UL technical data**

UL degree of protection	Type1, 2, 3R, 4, 4X, 12, 12K
-------------------------	------------------------------

**Ambient conditions**

Temperature	Operating temperature	min	°C	-25
		max	°C	+70
	Storage temperature	min	°C	-40
		max	°C	+85

**Dimensions**

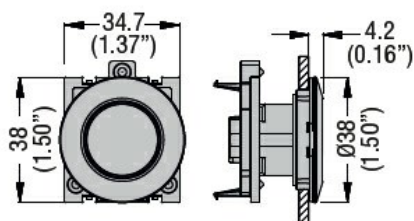

**Certifications and compliance**

Compliance	CSA C22.2 n° 14
	IEC/EN/BS 60947-1
	IEC/EN/BS 60947-5-1
	UL508

Certificates	cULus
--------------	-------

**ETIM classification**

ETIM 8.0

EC002024 -  
Accessories/spare  
parts for  
command  
devices