

Product Environmental Profile

ComPact, NSX Wireless auxiliary contact






General information

Representative product	ComPact, NSX Wireless auxiliary contact - LV429454
Description of the product	NSX wireless auxiliary contact provide remote and local information about the breaker status. Depending of the position (SD/OF/OD) of the wireless auxiliary contact and on the setting inside the gateway, the wireless auxiliary contact provides remotely ON/OFF/ TRIP indication. For SD position, it is possible to configure the wireless auxiliary contact to locally indicate a trip by an orange blinking LED that blinks during 8 hours in case of circuit breaker trip.
Functional unit	To provide remote status of the breaker every 8 hours or on position change during 10 years using Zigbee Green Power protocol according to IEEE 802.15.4.



Constituent materials

Reference product mass 31 g including the product, its packaging and additional elements and accessories

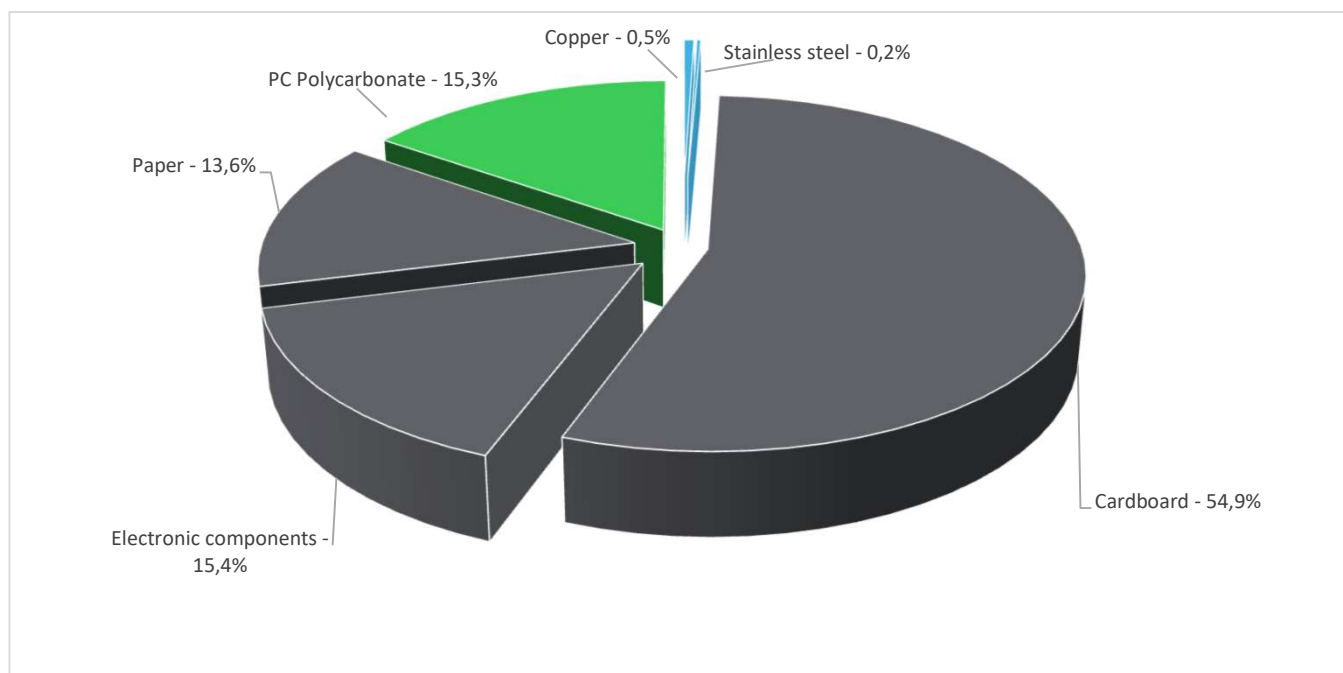

Plastics	15,3%
Metals	0,7%
Others	83,9%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive (European Directive 2011/65/EU of 2 January 2013, amended in March 2015, 2015/863/EU and in November 2017, 2017/2102/EU) and do not contain, or only contain in the authorised proportions, lead, mercury, cadmium, hexavalent chromium or flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers – PBDE), Bis (2-ethylhexyl)phthalate - DEHP, Benzyl butyl phthalate– BBP, Dibutyl phthalate - DBP, Diisobutyl phthalate - DIBP) as mentioned in the Directive.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The ComPact, NSX Wireless auxiliary contact presents the following relevant environmental aspects


Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 20,6 g, consisting of 80% Cardboard, 20% paper Packaging recycled materials is 100% of total packaging mass. Product distribution optimised by setting up local distribution centres
Installation	Does not require any installation operations
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains 1 Batterie (4g) & PCB that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 9% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).



Environmental impacts

Reference life time	10 years			
Product category	Other equipments - Active product			
Installation elements	No special components needed			
Use scenario	The product is in active mode 5% of the time and in idle mode 95% of the time 16.5mA for communication cycle idle 1uA Commissioning battery 3V			
Geographical representativeness	China			
Technological representativeness	The main purpose of the NSX wireless auxiliary contact (LV429454) is to provide remote and local information about the breaker status. The data used to make this PEP are the most representative of the product studied. No missing data is to be declared.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Indonesia -Batam	0	0	0

Compulsory indicators		ComPact, NSX Wireless auxiliary contact - LV429454					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	8,92E-05	8,92E-05	0*	0*	0*	0*
Contribution to the soil and water acidification	kg SO ₂ eq	7,09E-04	6,81E-04	1,83E-05	4,64E-06	0*	4,94E-06
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3,57E-04	3,49E-04	4,21E-06	1,13E-06	0*	2,54E-06
Contribution to global warming	kg CO ₂ eq	3,62E-01	3,49E-01	4,00E-03	1,11E-03	0*	8,07E-03
Contribution to ozone layer depletion	kg CFC11 eq	3,99E-08	3,96E-08	8,10E-12	0*	0*	2,74E-10
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	6,62E-05	6,42E-05	1,30E-06	3,47E-07	0*	4,01E-07
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	5,04E-03	5,03E-03	0*	0*	0*	4,01E-06
Total Primary Energy	MJ	4,71E+00	4,62E+00	5,66E-02	1,45E-02	0*	2,08E-02

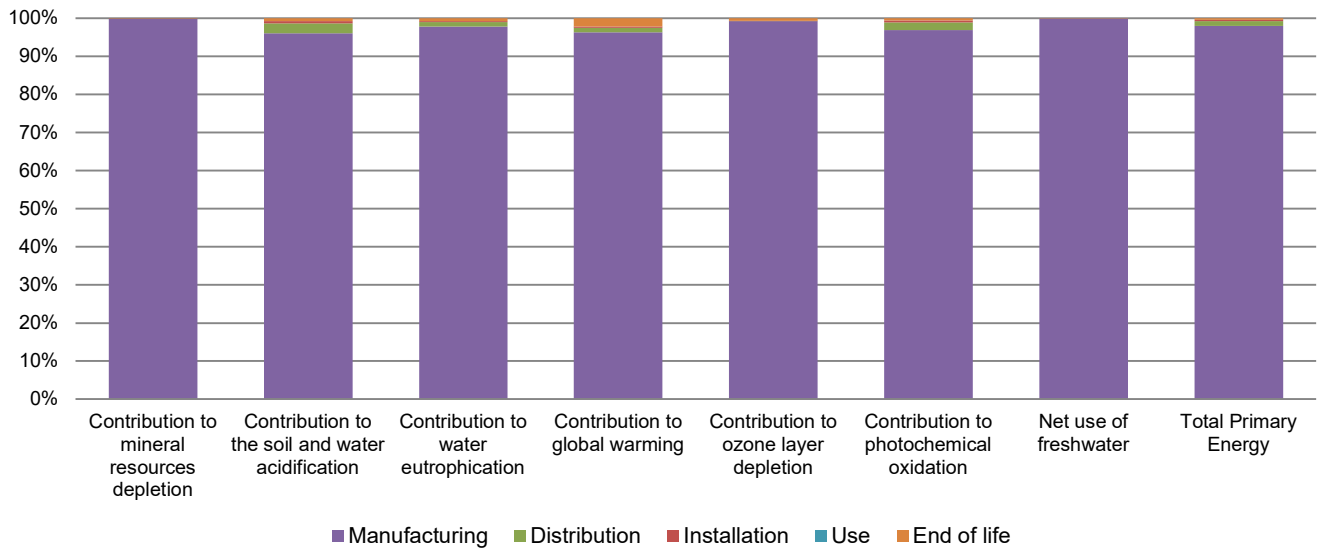

Optional indicators		ComPact, NSX Wireless auxiliary contact - LV429454					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	3,68E+00	3,59E+00	5,62E-02	1,44E-02	0*	1,70E-02
Contribution to air pollution	m ³	3,55E+01	3,52E+01	1,70E-01	4,44E-02	0*	1,51E-01
Contribution to water pollution	m ³	3,74E+01	3,63E+01	6,58E-01	1,69E-01	0*	3,39E-01
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	1,90E-02	1,90E-02	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1,67E-01	1,66E-01	7,54E-05	2,26E-05	0*	1,90E-05
Total use of non-renewable primary energy resources	MJ	4,54E+00	4,45E+00	5,65E-02	1,45E-02	0*	2,07E-02
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	1,09E-01	1,09E-01	7,54E-05	2,26E-05	0*	1,90E-05
Use of renewable primary energy resources used as raw material	MJ	5,72E-02	5,72E-02	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	4,34E+00	4,25E+00	5,65E-02	1,45E-02	0*	2,07E-02
Use of non renewable primary energy resources used as raw material	MJ	2,00E-01	2,00E-01	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	1,77E-01	1,54E-01	0*	0*	0*	2,27E-02
Non hazardous waste disposed	kg	8,51E-02	8,48E-02	1,42E-04	1,51E-04	0*	5,51E-05
Radioactive waste disposed	kg	5,57E-05	5,54E-05	1,01E-07	2,97E-08	0*	1,40E-07

Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	2,39E-02	2,60E-03	0*	2,05E-02	0*	8,45E-04
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,22E-03	0*	0*	0*	0*	2,22E-03
Exported Energy	MJ	6,51E-05	6,12E-06	0*	5,89E-05	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.9.1, database version 2016-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number	ENVPEP2104020_V1	Drafting rules	PCR-ed3-EN-2015 04 02
Date of issue	12/2021	Supplemented by	PSR-0005-ed2-EN-2016 03 29
Validity period	5 years	Information and reference documents	www.pep-ecopassport.org
Independent verification of the declaration and data			
Internal	X	External	
<i>The elements of the present PEP cannot be compared with elements from another program.</i>			
<i>Document in compliance with ISO 14021:2016 « Environmental labels and declarations - Self-declared environmental claims (Type II environmental labelling) »</i>			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

ENVPEP2104020_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

12/2021