
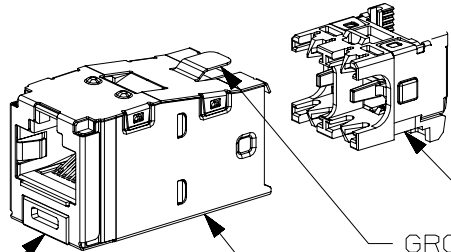


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

STRAIN RELIEF CLIP




WIRE CAP

GROUNDING TAB
SEE NOTE 5


MODULE HOUSING

SHIELD




.62
[15.87]

.73
[18.65]



1.50
[38.06]



ACTUAL SIZE

PART NUMBER	COLOR	DESCRIPTION	WEIGHT*
CJST6X88TGY	BLACK	8 POSITION, 8 WIRE SHIELDED 28/30 AWG MODULE WITH INTEGRAL SHIELD. TERMINATION CAP IS COLOR CODED FOR T568A AND T568B WIRING SCHEMES.	3.314 LB/100 PCS [1503g/100 PCS]

NOTES:

*WEIGHT IS APPROXIMATE

1. AQUA TERMINATION CAP DESIGNATES CATEGORY 6A PERFORMANCE.
2. MATERIAL HOUSING - ABS
SHIELD - TIN PLATED PHOS. BRONZE
WIRE CAP - PC
3. ALL CATEGORY 6A, 8 POSITION, 8 WIRE JACK MODULES ARE UNIVERSAL IN DESIGN. THEY ACCEPT SIX AND EIGHT POSITION MODULAR PLUGS WITHOUT DAMAGE.
4. DIMENSIONS IN PARENTHESES ARE IN METRIC.
5. .187" X .010" GROUNDING TAB PROVIDED AS OPTIONAL CONDUCTIVE PATH FOR GROUNDING.
6. TERMINATES ONLY 28-30 AWG CONDUCTORS.
7. WIRE CAP CAN ACCOMODATE .120" TO .220" RANGE OF CABLE DIAMETERS.

PART NUMBER		CJST6X88TGY	
TITLE		TX6A 10GIG SHIELDED 28/30 AWG JACK MODULE	
ITEM REVISION NAME		CUSTOMER DRAWING	
DATASET FILE NAME		14M544AA/01	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		PANDUIT	
.x ± .xxx ± .010 [.3] .xx ± .03 [.8] ANGLES ±			
DRAWING NUMBER:		SEE NOTE 2	
DRAWN BY		14M544AA-02	
DATE		2-20-15	
CHK		JAV	
SCALE		FULL	
SHT 1 OF 1		A	

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
1	3-5-15	BJN	JAV	FMS	UPDATED WIRE CAP DESIGN	14M544AA-02
R	2-20-15	BJN	JAV	FMS	RELEASED TO PRODUCTION	14M544AA-02

D10100DA/14